

# Brigade

## Vehicle Safety Systems

Product  
Catalogue

English  
Edition 24

# “Zero lives lost in collisions with commercial vehicles and mobile machinery”

Brigade is at the pinnacle of commercial vehicle and mobile plant blind-spot safety. A founder and innovator of sensing and monitoring systems that have helped save lives for over forty years.

Whilst our portfolio may be emulated, our commitment to vehicle safety, our reliable, trusted products and our dedicated team of experts, cannot. We invest in people as well as technology. Everyone in the Brigade family understands the life-changing significance of the products and service we provide and the importance of outstanding systems that work in the most demanding of situations.

For the future: We will continue to inform and work with policy makers and industries to ensure blind-spot mitigation is effective. We will recruit the highest calibre people who are passionate about what we do. We will impart expert knowledge and advice to help customers with their challenges. We will always seek to innovate and bring new products to market that help prevent collisions and save lives. We will strive to achieve our vision of zero lives lost by constantly improving the safe operation of commercial vehicles and mobile plant around the world.

- Brigade Electronics Group Plc management systems are certified to ISO9001:2015
- Our principal manufacturing facilities are certified to IATS16949:2016
- All applicable products have CE-marking in Europe and FCC/IC approval in North America
- The majority of our products comply with UN ECE Regulation 10 (EMC)
- Combinations of our camera monitor systems are certified to Regulation 46
- Our products comply with REACH and RoHS

# Brigade

## Contents

<b>Camera Monitor Systems</b>	<b>4</b>
Backeye®360	6
AI Cameras	10
Backeye® Cameras	11
IP Cameras	16
Backeye® Monitors	18
Backeye® Camera Monitor Kits	22
Cables & Adapters	24
Ancillaries	32
<b>Mobile Digital Recording</b>	<b>34</b>
Recorders	36
IP Expansion Modules	39
Accessories	40
Dash Cams	41
<b>Object Detection Systems</b>	<b>44</b>
AI systems	46
Ultrasonic Detection Systems	49
Backsense® Radar Detection Systems	55
Zonesafe® RFID Detection Systems	58
<b>Warning Alarms</b>	<b>62</b>
bbs-tek® Alarms	64
Speaking Alarms	66
Ancillaries	69
<b>Index by Part number</b>	<b>70</b>
<b>Index by Model number</b>	<b>72</b>
<b>Warranties</b>	<b>74</b>



# You're safer with us



# Camera Monitor Systems



Brigade's camera monitor systems enable drivers and operators to manoeuvre and drive safely.

Vehicle-mounted cameras can help the driver to see blind spots by delivering a live feed on the monitor of everything in the camera view, including people or obstacles.

**Camera monitor systems** are used in a wide range of on and off-road applications to meet a host of health and safety and legislative requirements. The range includes entry-level reversing cameras to full-vehicle camera system with AI. With single-to-multiple camera inputs and auto-triggers, Brigade cameras and monitors will work on any application in any industry and are fully compatible with MDR recorders.

**Internet Protocol (IP) Cameras** are high-definition digital cameras with their own IP address. Directly connected to an MDR, the IP camera transmits digital video over a data connection (ethernet cable) where the images are saved to the onboard storage.

**Backeye@360** is an intelligent camera monitor system designed to assist low-speed manoeuvring by providing the driver with a complete 'birds-eye' surround view of the vehicle in real time.

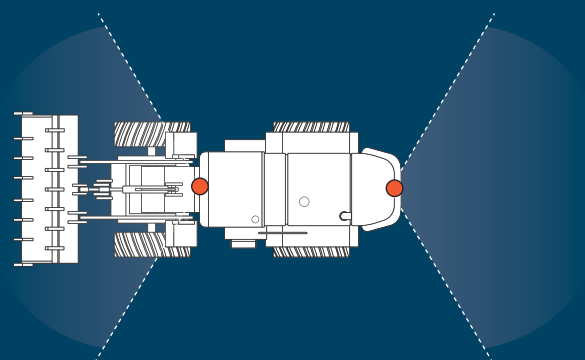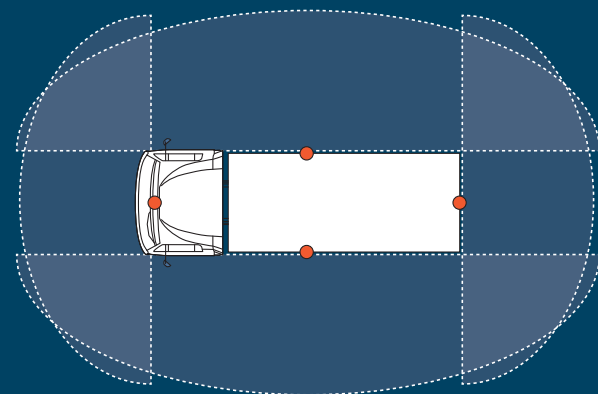

# Brigade





360° Camera Monitor Systems


An intelligent camera monitor system designed to assist low-speed manoeuvring by providing the driver with a complete ‘bird’s-eye’ surround view of the vehicle in real time.

360° technology works with four ultra wide-angle cameras, each covering one full side of the vehicle with a viewing angle of over 180°. High-mounted on the front, rear and sides, the calibrated cameras capture all of the surrounding area including the blind spots of the vehicle or machine.

The four live images are simultaneously sent to an electronic control unit (ECU) where they are instantly processed, combined, blended and stitched. A clear, real-time view is provided to the driver in a single image on the monitor.

360° with Artificial Intelligence

- Recognises and alerts the driver to people around the vehicle
- Detected people are shown in a coloured box overlayed on the 360° image on the driver’s monitor
- Compatible with all Brigade HD monitors and MDR recorders

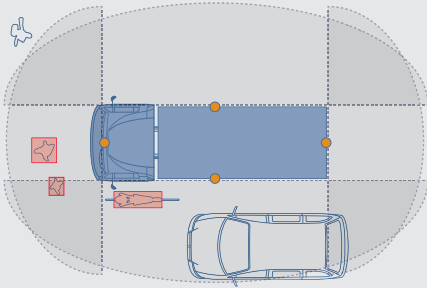

Model

Part No:

AI AHD 360° CAMERA SYSTEM

AI

VBV-360-1000 - High Definition Backeye®360 system with Artificial Intelligence 7524



- IP69K cameras
- 12-24Vdc
- Size (WxHxD) ECU 140 x 122 x 40mm
- Size (WxHxD) Camera 140 x 63 x 54mm
- 3 year warranty

**AHD**

**Contents**

- 1 x ECU
- 4 x VBV-2230-C-AI cameras
- 1 x Interface Harness
- 1 x Power harness
- 1 x Video input harness
- 1 x Video output harness
- 1 x Video output cable
- 1 x Remote control
- 1 x 5m extension cable
- 2 x 10m extension cable
- 1 x 20m extension cable

**Features**

- AI technology
- Audible and visual alerts when a pedestrian or cyclist is detected
- Comprehensive view of surrounding area in a single image
- 1080p HD 360° image
- 5 view modes:
  - Choice of 2D or 3D
  - Landscape & portrait configurations
  - Front & rear crossing-traffic
- Customisable vehicle position
- Auto calibration via monitor
- Left, right, reverse & speed signal triggers
- Configurable on-screen parking markers

**Power**

- Power consumption: 15 Watts
- Current: 1.22 Amps

**Durability & Standards**

- Mechanical vibration: 2.8G
- Operating temperature: -20 to +75°C
- IP30 ECU
- CE marked
- E-Marked: UNECE R10 compliant
- FCC Approved
- IC Approved

**NOTES:**

- Calibration mats are required for installation.

- Customisable overlay guidelines per camera view
- 2 x video outputs
- Ultra-wide viewing angle cameras (HxV) 190° x 130°
- 1/4" CMOS sensor
- Video output: AHD 1.0 and CVBS (PAL/NTSC)
- 360 view and individual channels recordable on Brigade MDR recorders

AI CAMERA CABLES

AI



VBV-AI801	- 1 metre AI Camera Extension Cable	7489
VBV-AI805	- 5 metre AI Camera Extension Cable	7490
VBV-AI810	- 10 metre AI Camera Extension Cable	7508
VBV-AI815	- 15 metre AI Camera Extension Cable	7509
VBV-AI820	- 20 metre AI Camera Extension Cable	7491

Model

Part No:

AHD 360° CAMERA SYSTEM

HD

BN360-300 - High Definition Backeye®360 system

5800



- IP69K cameras
- 12-24Vdc
- Size (WxHxD) ECU 179 x 113 x 26mm
- Size (WxHxD) Camera 55 x 45 x 41mm
- 5 year warranty

**AHD**

**Contents**

- 1 x ECU
- 4 x BN360-1000C cameras
- 1 x Video output cable to connect to SELECT range monitor.
- 1 x set-up/view-select button
- 1 x ECU power harness
- 1 x ECU interface/video input harness

**Features**

- 720p HD 360° image
- 15 different view modes (10 x landscape & 5 x portrait configurations)
  - Front & rear crossing-traffic
  - Customisable vehicle position
- 2 pre-defined configuration groups
- Configure & customise set up via PC calibration software
- Left, right, reverse & speed signal triggers
- Configurable on-screen parking markers
- Customisable overlay guidelines per camera view
- 2 x video outputs
- Ultra-wide viewing angle cameras (HxV) 182° x 118°
- 1/4" CMOS sensor
- Video output: AHD 1.0 and NTSC
- 360 view and individual channels recordable on Brigade MDR recorders

**Power**

- Power consumption: 15 Watts
- Current: 1.22 Amps

**Durability & Standards**

- Mechanical vibration: 8.5G
- Mechanical shock: 51G
- Operating temperature: -30 to +75°C
- IP30 ECU
- CE marked
- E-Marked: UNECE R10 compliant
- FCC Approved
- IC Approved
- ISO 20653:2006
- ISO 13766-1:2018

**NOTES:**

- Calibration kit is required for installation.
- Monitor and camera extension cables not included

BN360-300 360° CAMERA MONITOR SYSTEMS

HD



Complete 360 AHD camera monitor system for large rigid vehicles



SE-770HR-300 - 360 AHD camera system with VBV-770HM - 7" AHD monitor 7296  
SE-7014HRF-300 - 360 AHD camera system with VBV-7104HFM - 10.4" AHD monitor 7297

- 1 x Monitor
- 1 x BN360-300 AHD 360 system
- 1 x BN360-H310 - 10m camera cable
- 2 x BN360-H315 - 15m camera cables
- 1 x BN360-H320 - 20m camera cable






















See individual products for detailed specifications and warranties

Model		Part No:
BN360-300 CABLES		HD
	BN360-H320	HD 20m camera cable
	BN360-H315	HD 15m camera cable
	BN360-H310	HD 10m camera cable
	BN360-H305	HD 5m camera cable
	BN360-H3025	HD 2.5m camera cable
	AC-H305	HD Splitter cable for MDR (1 required per camera)
BN360-300 MOUNTING BRACKETS		
	BN360-100C-BKT01	Adaptable mounting bracket <small>Can be shaped to allow installation on non-vertical surfaces</small>
	BN360-100C-BKT02	Mounting bracket to adjust camera angle
	BE360-CD	Deflector to shield camera from knocks <small>(To be used with BN360-100C-BKT02 Mounting bracket)</small>
	BN360-100C-BKT03	Deflector to shield camera from knocks

Camera Monitor System Ranges

AI	AI cameras are a new generation of active blind-spot detection. Using Artificial Intelligence, the cameras detect and recognise the human form within the pre-defined detection zone and reliably warn the driver visually and/ or audibly before a possible collision occurs.
ELITE	Top of the range systems that are the first choice for Original Equipment Manufacturers (OEMs) and Bodybuilders. Exceptional quality and consistent performance in the harshest conditions. Rigorously tested to higher standards, the superior components and build quality are reflected in the Elite series' 5 year warranty. Ideal for heavy duty applications including N2 and N3 Heavy Goods Vehicles (HGVs), on/off-highway vehicles, agricultural machinery and mobile plant used on Construction, Civil Engineering, Quarry and Mine sites.
SELECT	High quality, reliable, best-selling mid-range systems. First choice in the Aftermarket and popular also with OEMs and Bodybuilders. 3 year warranty. Ideal for medium to large on-highway vehicles and smaller off-highway mobile plant.
ESSENTIAL	Entry level reversing solution for cost-conscious Aftermarket customers. Ideally suited for on-highway applications.



Camera Monitor Icon Key

Camera icons		Cable icons (Black = solid/pins)	
	Infrared LEDs for ultra-low-light performance		Male connector Select
	Day/night sensor		Female connector Select
	Audio		Male screw fit connector Elite
	Heater		Female screw fit connector Elite
	Normal/mirror view		Male push fit connector Elite
WDR	Wide Dynamic Range		Female push fit connector Elite
DWDR	Digital Wide Dynamic Range		Male IP connector
Monitor icons			Female IP connector
	Number of camera inputs		Male AI connector
	Number of auto-triggers		Female AI connector
	Audio		
	'Button-lock' anti-tamper feature		
	On-screen distance and vertical line markers		
	Normal/mirror view - switching from menu		


Cameras with Artificial Intelligence

AI cameras are a new generation of active blind-spot detection. Using Artificial Intelligence, the cameras detect and recognise the human form within the pre-defined detection zone and reliably warn the driver visually and/or audibly before a possible collision occurs.

- Recognises and alerts the driver to people in the front and rear blind-spot
- Detected people are shown in a coloured box overlayed on the HD camera image on the driver's monitor
- Image processing and detected-person-overlay directly from the camera unit
- Plug and play:  
AI camera connects directly to the Brigade monitor and/or optional buzzer
- Compatible with all Brigade HD monitors and MDR recorders

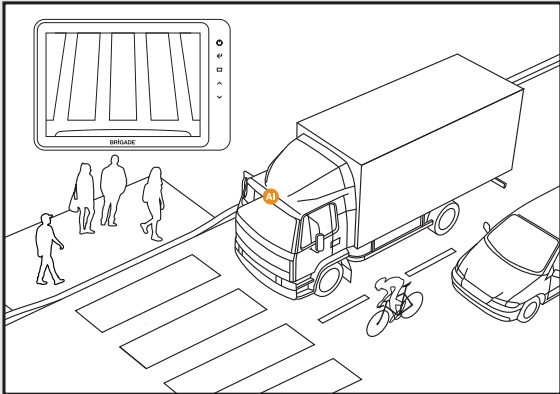

No pedestrians in the detection zone

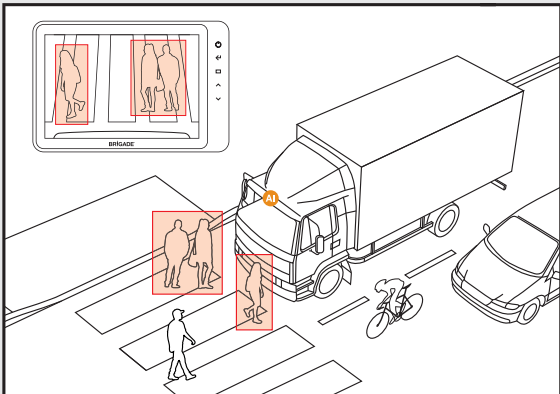

Detected pedestrians

Model

Part No:

CAMERA WITH ARTIFICIAL INTELLIGENCE AI



VBV-2220C AI-D04	Front-facing AI camera - normal view	7321
VBV-2230C AI-D04	Rear AI camera - mirror view	7396

- 12-24Vdc
- Camera Viewing angles:  
Front : 52°  
Rear: 129°
- AI Detection range:  
Front: Covers Class 6 area  
Rear: Up to 11m (dependent on camera mounting height)
- IP69K
- Camera Size (WxHxD)  
97.5 x 75.3 x 72mm
- 2 years warranty

AHD

- Features**
- High Definition AHD 1080P
  - Recognises and alerts the driver to people in the front and rear blind-spot
  - Detected people are shown in coloured box overlayed onto the camera image
  - Image processing and detected-person-overlay directly from the camera unit
  - Plug and play:  
AI camera connects directly to the Brigade monitor and/or optional internal buzzer or external alarm
  - Compatible with all Brigade AHD monitors and MDR recorders
  - Optimised for people wearing PPE
  - Alarm trigger output: 12V
- Durability & Standards**
- Operating Voltage: 12-24V
  - TV system: 25fps
  - CMOS 1/2.9" 2M Pixel sensor
  - Mechanical vibration: 5.9G
  - Operating temperature: -20 to +70°C
  - E-marked: UNECE R10 compliant
  - CE marked
  - FCC Approved
  - UKCA Approved
  - IC Approved

- Specifications**
- 260mA @12V, 140mA @24V Imaging

**NOTE:**  
• VBV AI camera extension cables only to be used



AI CAMERA CABLES

VBV-AI801	- 1m AI Camera extension cable	7489
VBV-AI805	- 5m AI Camera extension cable	7490
VBV-AI810	- 10m AI Camera extension cable	7508
VBV-AI815	- 15m AI Camera extension cable	7509
VBV-AI820	- 20m AI Camera extension cable	7491
AC-24-12(011)	- Power adapter for AI camera	5760



Elite Range Camera/monitor compatibility

KEY	ELITE MONITORS	SELECT MONITORS	
	BE-970WFM BE-970WM BE-870LM BE-870FM	VBV-770HFM VBV-770HM VBV-7104HFM VBV-7104HM	VBV-770M VBV-750M
✓ = Compatible			
✓ AC-007 = Compatible with adapter(s) shown			
ELITE BE-810C Shutter camera	✓	✓ AC-007 & SC-1000-ECU	
All other ELITE cameras	✓	✓ AC-007	

Model

Part No:

AHD CAMERA 1080p ELITE

BE-8100C - PAL	6408
BE-8101C - NTSC	6410



- Viewing angle (HxVxD)  
126 x 69 x 144°
  - IP69K
  - Size (WxHxD)  
86 x 72 x 78mm
  - 5 year warranty
- R46 APPROVED\* AHD

- Features**
- High definition picture quality with 1080p AHD 2.0 video signal output
  - 4 Infrared LEDs for ultra-low light performance
  - Day / Night sensor
  - Microphone
  - Mirror / Normal view
  - Back Light Compensation
  - Automatic white balance
  - CMOS sensor
  - TV lines: 800
- Power**
- Power consumption: 4.2 Watts
  - Current: 0.35 Amps
- Durability & Standards**
- Mechanical vibration: 8.5G
  - Mechanical shock: 51G
  - Operating temperature: -40 to +85°C
  - CE marked
  - E-Marked: UNECE R10 compliant
  - FCC Approved
  - IC Approved
  - ISO 13766:2018
  - ISO 20653:2013
  - EN61000-6-3:2021
  - Camera monitor system R46 approved

CAMERA WITH WDR ELITE

BE-800C	- PAL	1623
BE-801C	- NTSC	1905
BE-800C(40)	- Narrow viewing angle: 32 x 24 x 41° PAL	1559
BE-801C(40)	- Narrow viewing angle: 33 x 25 x 42° NTSC	2085
BE-800C(78)	- Narrow viewing angle: 69 x 51 x 92° PAL	1426
BE-801C(78)	- Narrow viewing angle: 71 x 52 x 94° NTSC	2084
BE-890C	- Waterproof to IP69K, No microphone, PAL	2871
BE-891C	- Waterproof to IP69K, No microphone, NTSC	5426
BE-850C	- 12/24Vdc, waterproof to IP69K, PAL	4924
BE-800C-NIR	- No Infrared LEDs, PAL	4247



- Viewing angle (HxVxD)  
102 x 76 x 132° PAL  
108 x 80 x 136° NTSC
  - IP68
  - Size (WxHxD)  
86 x 72 x 80mm
  - 5 year warranty
- R46 APPROVED\* WDR

- Features**
- Wide Dynamic Range for improved detail in shadows and highlights
  - 5 Infrared LEDs for ultra-low light performance (except BE-800C-NIR)
  - Day / Night sensor
  - Heater
  - Microphone
  - Mirror / Normal view
  - Automatic white balance
  - Sony CMOS sensor
  - TV lines: 600
- Power**
- Power consumption: 4.5 Watts
  - Current: 0.33 Amps (0.37 - 2.63 Amps BE-850C)
- Durability & Standards**
- Mechanical vibration: 8.5G
  - Mechanical shock: 51G
  - Operating temperature: -40 to +85°C
  - CE marked
  - E-Marked: UNECE R10 compliant
  - FCC Approved
  - IC Approved
  - ISO 13766:2006
  - ISO 20653:2006
  - EN13309:2010
  - Camera monitor system R46 approved BE-800C, BE-890C & BE-850C only



Model

Part No:

SHUTTER CAMERA WITH WDR

ELITE

BE-810C - Shutter camera

1242



- Viewing angle (HxVxD)  
103 x 71 x 134°
  - IP69K
  - Size (WxHxD)  
123 x 86 x 80mm
  - 5 year warranty

OOO  
LED  
OOO

WDR
- Features

  - Wide Dynamic Range for improved detail in shadows and highlights
  - 5 Infrared LEDs for ultra-low light performance
  - Day / Night sensor
  - Automatic shutter
  - Heater
  - Microphone
  - Mirror / Normal view
  - Backlight compensation
  - Automatic white balance
  - Sony CMOS sensor
  - TV System: PAL
  - TV Lines: 450
- Power

  - Power consumption: 5.4 Watts
  - Current: 0.45 Amps

Durability & Standards

  - Mechanical vibration: 8.5G
  - Mechanical shock: 51G
  - Operating temperature: -40 to +70°C
  - CE Marked
  - E-Marked: UNECE R10 compliant
  - FCC approved
  - IC approved
  - ISO 13766-1:2018

Select Range Camera/monitor compatibility

KEY	ELITE MONITORS	SELECT MONITORS	
	BE-970WFM BE-970WM BE-870LM BE-870FM	VBV-770HFM VBV-770HM VBV-7104HFM VBV-7104HM	VBV-770M VBV-750M
✓ = Compatible ✓ AC-006 = Compatible with adapter(s) shown			
SELECT VBV-710C Shutter	✓ AC-006	✓	
All other SELECT cameras	✓ AC-006	✓	

Model

Part No:

AHD CAMERA 1080p

SELECT HD

VBV-7100C - High definition (1080p-PAL)

VBV-7101C - High definition (1080p-NTSC)

VBV-7190C - No audio. High definition (1080p-PAL)

VBV-7191C - No audio. High definition (1080p-NTSC)

5466

5467

5470

5471



- Viewing angle (HxVxD)  
110° x 60° x 127°
  - IP69K
  - Size (WxHxD)  
81 x 77 x 70mm
  - 3 year warranty

OOO  
LED  
OOO

AHD
- Features

  - 4 high-power Infrared LEDs for ultra-low light performance
  - Day / Night sensor
  - Microphone
  - Mirror view
  - \* Backlight compensation
  - Automatic white balance
  - Sony CMOS 1/3" & Nextchip ISP
  - TV System: AHD 1.0 (1080p)
  - TV Lines: 800
- Power

  - Power consumption: 3 Watts
  - Current: 0.2 Amps

Durability & Standards

  - Mechanical vibration: 8.5G
  - Mechanical shock: 51G
  - Operating temperature: -30 to +80°C
  - CE marked
  - E-Marked: UNECE R10 compliant
  - FCC approved
  - IC approved

SHUTTER CAMERA

SELECT

VBV-710C - Shutter camera

2808



- Viewing angle (HxVxD)  
98 x 73 x 108°
  - IP68 / IP69K
  - Size (WxHxD)  
122 x 85 x 82mm
  - 3 year warranty

OOO  
LED  
OOO
- Features

  - 4 high power infrared LEDs for ultra-low light performance
  - Day / Night sensor
  - Automatic Shutter
  - Heater
  - Microphone
  - Mirror / Normal view
  - Backlight compensation
  - Automatic white balance
  - 1/3" Sharp CCD
  - TV System: PAL
  - TV Lines: 580
- Power

  - Max Power consumption: 6 Watts
  - Max Current: 0.5 Amps

Durability & Standards

  - Mechanical vibration: 10G
  - Mechanical shock: 50G
  - Operating temperature: -30 to +70°C
  - CE Marked
  - E-Marked: UNECE R10 compliant

Model	Part No:
<b>AHD EYEBALL CAMERA</b>	
<b>SELECT HD</b>	
VBV-3100C - High Definition flush-mount eyeball camera Mirror view - (1080p-PAL)	7143
VBV-3101C - High Definition Flush-mount eyeball camera Mirror view - (1080p-NTSC)	7144
VBV-3120C - High Definition Flush-mount eyeball camera Normal view - (1080p-PAL)	7145
VBV-3121C - High Definition Flush-mount eyeball camera Normal view - (1080p-NTSC)	7146



<ul style="list-style-type: none"><li>• Viewing angle (HxVxD) 130 x 70 x 151°</li><li>• IP69K</li><li>• Size (WxHxD) 57 x 42 x 70mm</li><li>• 3 year warranty</li></ul> <div><div>OOO LED OOO</div><div></div><div></div><div><b>AHD</b></div></div>	<b>Features</b> <ul style="list-style-type: none"><li>• 5 high power infrared LEDs for ultra-low light performance</li><li>• Day / Night sensor</li><li>• Lens swivel adjustment: 26° (Top) x 4° (Bottom) x 4° (Left) x 4° (Right)</li><li>• Lens rotation adjustment: ±180°</li><li>• Microphone</li><li>• Backlight compensation</li><li>• Automatic white balance</li><li>• 1/3" CMOS</li><li>• TV System: AHD 2.0 (1080p)</li><li>• TV lines: 900</li></ul>	<b>Power</b> <ul style="list-style-type: none"><li>• Power consumption: 1.6 Watts</li><li>• Current consumption: 0.112 Amps</li></ul> <b>Durability &amp; Standards</b> <ul style="list-style-type: none"><li>• Mechanical vibration: 8.5G</li><li>• Mechanical shock: 51G</li><li>• Operating temperature: -30 to +70°C</li><li>• CE marked</li><li>• E-Marked: UNECE R10 compliant</li><li>• FCC approved</li><li>• IC approved</li></ul>
--	---	---

<b>AHD DOME CAMERA</b>	
<b>SELECT HD</b>	
MD-60 - High definition dome camera (720p-PAL)	5737
MD-61 - High definition dome camera (720p-NTSC)	5738
MD-60(SW) - High definition dome camera - Superwide view angle (720p-PAL)	5688
MD-61(SW) - High definition dome camera - Superwide view angle (720p-NTSC)	5690
MD-60(W) - High definition dome camera - Wide view angle (720p-PAL)	5696
MD-61(W) - High definition dome camera - Wide view angle (720p-NTSC)	5698



<ul style="list-style-type: none"><li>• Viewing angle (HxVxD) 68° x 38° x 80° (SW) 150° x 85° x 180° (W) 93° x 51° x 110°</li><li>• IP68</li><li>• Size (Diameter x H) 76 x 59.5mm</li><li>• 3 year warranty</li></ul> <div><div></div><div></div><div><b>AHD</b></div></div>	<b>Features</b> <ul style="list-style-type: none"><li>• Dome camera with 150° movement range in all directions</li><li>• Can be used internally or externally</li><li>• Mirror / Normal view</li><li>• Backlight compensation</li><li>• Automatic white balance</li><li>• CMOS - 1/3" ON-Semi ISP - Nextchip</li><li>• TV System: AHD 1.0 (720p)</li><li>• TV Lines: 900</li><li>• TV Lines: 600 (SW &amp; W)</li></ul>	<b>Power</b> <ul style="list-style-type: none"><li>• Power consumption: 1 Watt</li><li>• Current: 0.57 Amps</li></ul> <b>Durability &amp; Standards</b> <ul style="list-style-type: none"><li>• Mechanical vibration: 10G</li><li>• Mechanical shock 51G</li><li>• Operating temperature: -30 to +85°C</li><li>• CE marked</li><li>• E-Marked: UNECE R10 compliant</li><li>• FCC Approved</li><li>• IC Approved</li></ul>
---	---	---

<b>OPTIONAL EXTRAS</b>	
MD-50SM-30 - Surface mounting adapter (30mm deep)	5003
MD-50AM-15 - Angled surface mounting adapter (adds 15°)	5004
MD-50AM-25 - Angled surface mounting adapter (adds 25°)	5005



Model	Part No:
<b>AHD MINI CAMERA</b>	
<b>SELECT HD</b>	
DMC-1035 - High definition mini camera (internal use) (720p-PAL)	5721
DMC-1031 - High definition mini camera (internal use) (720p-NTSC)	5719



<ul style="list-style-type: none"><li>• Viewing angle (HxVxD) 68 x 38 x 80°</li><li>• IP30</li><li>• Size (WxHxD) 43 x 45 x 37.5mm</li><li>• 3 year warranty</li></ul> <div><div></div><div></div><div><b>AHD</b></div></div>	<b>Features</b> <ul style="list-style-type: none"><li>• Mirror / Normal view</li><li>• Backlight compensation</li><li>• Automatic white balance</li><li>• CMOS - 1/3" ON-Semi ISP - Nextchip</li><li>• TV System: AHD 1.0 (720p)</li><li>• TV Lines: 900</li></ul>	<b>Power</b> <ul style="list-style-type: none"><li>• Power consumption: 1.0 Watt</li><li>• Current: 0.55 Amps</li></ul> <b>Durability &amp; Standards</b> <ul style="list-style-type: none"><li>• Mechanical vibration: 10G</li><li>• Mechanical shock: 51G</li><li>• Operating temperature: -30 to +85°C</li><li>• CE marked</li><li>• E-Marked: UNECE R10 compliant</li><li>• FCC approved</li><li>• IC approved</li></ul>
---	--	--

<b>CYLINDER CAMERA</b>	
<b>SELECT</b>	
VBV-485C - Cylinder camera PAL	2199
VBV-481C - Cylinder camera NTSC	2843



<ul style="list-style-type: none"><li>• Viewing angle (HxVxD) 91 x 77 x 123° PAL 96 x 71 x 126° NTSC</li><li>• IP69K/IP68</li><li>• Size (Diameter x Length) 35 x 50mm</li><li>• 3 year warranty</li></ul> <div><div>OOO LED OOO</div><div></div></div>	<b>Features</b> <ul style="list-style-type: none"><li>• 9 LEDs for ultra-low light performance</li><li>• Day/night sensor</li><li>• Mirror view</li><li>• Backlight compensation</li><li>• Auto white balance</li><li>• 1/3" Sharp CCD</li><li>• TV Lines: 680 PAL 800 NTSC</li></ul>	<b>Power</b> <ul style="list-style-type: none"><li>• Power consumption: 1.9 Watts</li><li>• Current: 0.2 Amps</li></ul> <b>Durability &amp; Standards</b> <ul style="list-style-type: none"><li>• Mechanical vibration: 10G</li><li>• Mechanical shock: 50G</li><li>• Operating Temperature: -30 to +70°C</li><li>• E-Marked: UNECE R10 compliant</li><li>• CE marked</li><li>• FCC approved VBV-481C only</li><li>• IC approved VBV-481C only</li></ul>
---	---	--








What are IP cameras & Expansion Modules?





An Internet Protocol (IP) camera is a high-definition digital camera with its own IP address. Instead of transmitting video over a video cable to a monitor or Mobile Digital Recorder (MDR), the IP camera transmits digital video to an MDR over a data connection (ethernet cable) where the images are saved to the onboard storage.





Brigade Expansion Modules use Power Over Network (PON) Switch technology to expand the channel capability of the MDR by transmitting digital video images from up to 8 IP cameras over a single ethernet connection to the MDR. The MDR on-screen display allows easy camera set up without need for specific IP camera knowledge



Benefit: Connecting IP cameras increases the number of channels available on the MDR:

MDR-641	- 4 x Analogue channels plus 1 x IP channel	= 5 channels
MDR-508	- 8 x Analogue channels plus 1 x IP channel	= 9 channels
MDR-644	- 4 x Analogue channels plus 4 x IP channels	= 8 channels
MDR-644 and 4 x PON switch	- 4 x Analogue channels plus 8 x IP channels	= 12 channels
MDR-508 and 4 x PON switch	- 8 x Analogue channels plus 4 x IP channels	= 12 channels
MDR-508 and 8 x PON switch	- 8 x Analogue channels plus 8 x IP channels	= 16 channels

Model	Part No:
IP CAMERA	
IP-1000C - Internal forward-facing camera	5935
<div><div></div><div><ul style="list-style-type: none"><li>Viewing angle (HxVxD) 87 x 51 x 98°</li><li>IP20</li><li>Size (WxHxD) 75 x 122 x 42mm</li><li>3 year warranty</li></ul></div></div> <div><div><ul style="list-style-type: none"><li>Features<ul style="list-style-type: none"><li>High-definition picture quality</li><li>Windscreen flush-mounted to avoid reflections</li><li>Microphone</li><li>Normal view - mirror view via OSD settings or IP web interface</li><li>Backlight compensation</li><li>Automatic white balance</li><li>Supports web browser access</li><li>Fast setup feature in MDR 500 series to auto-assign camera IP address</li><li>Picture Elements: 1920(H) x 1080(V)</li><li>Imaging device: CMOS</li><li>TV Lines: 1050</li><li>Latency: 250ms</li></ul></li></ul></div><div><ul style="list-style-type: none"><li>Power<ul style="list-style-type: none"><li>Power consumption: 2.7 Watts</li><li>Current: 0.23 Amps @ 12V</li></ul></li><li>Durability &amp; Standards<ul style="list-style-type: none"><li>Mechanical vibration: 6G</li><li>Mechanical shock: 51G</li><li>Operating temperature: -40 to +70°C</li><li>Video output signal: H264 or H.265</li><li>Network protocol: MDR5, ONVIF, TCP/IP, HTTP, DHCP, NTP, FTP</li><li>CE marked</li><li>E-Marked: UNECE R10 compliant</li><li>FCC approved</li><li>IC approved</li></ul></li></ul></div></div>	

IP CAMERA	
IP-1200C - Surface-mount dome camera	5937
<div><div></div><div><ul style="list-style-type: none"><li>Viewing angle (HxVxD) 110 x 60 x 136°</li><li>IP65</li><li>Size (WxHxD) 101.5 x 57.4 x 96 mm</li><li>3 year warranty</li></ul></div></div> <div><div><ul style="list-style-type: none"><li>Features<ul style="list-style-type: none"><li>High-definition picture quality</li><li>Surface mount</li><li>Heater</li><li>Microphone</li><li>Normal view</li><li>Backlight compensation</li><li>Automatic white balance</li><li>Supports web browser access</li><li>Fast setup feature in MDR 500 series to auto-assign camera IP address</li><li>Picture Elements: 1920(H) x 1080(V)</li><li>Imaging device: CMOS</li><li>TV Lines: 900</li><li>Latency: 250ms</li></ul></li></ul></div><div><ul style="list-style-type: none"><li>Power<ul style="list-style-type: none"><li>Power consumption: 3.5 Watts</li><li>0.26 A @ 12V (IR off)</li><li>0.31 A @ 12V (IR on)</li></ul></li><li>Durability &amp; Standards<ul style="list-style-type: none"><li>Mechanical vibration: 6G</li><li>Mechanical shock: 51G</li><li>Operating temperature: -40 to +70°C</li><li>Video output signal: H264 or H.265</li><li>Network protocol: MDR5, ONVIF, TCP/IP, HTTP, DHCP, NTP, FTP</li><li>CE marked</li><li>E-Marked: UNECE R10 compliant</li><li>FCC approved</li><li>IC approved</li></ul></li></ul></div></div>	

Model	Part No:
IP CAMERA	
IP-1100C - Surface-mount camera	5936
<div><div></div><div><ul style="list-style-type: none"><li>Viewing angle (HxVxD) 84 x 46 x 103°</li><li>IP67</li><li>Size (WxHxD) 96 x 52 x 58mm</li><li>3 year warranty</li></ul></div></div> <div><div><ul style="list-style-type: none"><li>Features<ul style="list-style-type: none"><li>High-definition picture quality</li><li>Surface mount</li><li>Built-in G-sensor for automatic image orientation</li><li>High power infrared LED for low-light performance</li><li>Day/night sensor</li><li>Normal view</li><li>Backlight compensation</li><li>Automatic white balance</li><li>Supports web browser access</li><li>Fast setup feature in MDR 500 series to auto-assign camera IP address</li><li>Imaging device: CMOS</li><li>Picture elements: 1920 x 1080</li><li>TV Lines: 800</li><li>Latency: 800ms</li></ul></li></ul></div><div><ul style="list-style-type: none"><li>Power<ul style="list-style-type: none"><li>Power consumption: 5 Watts</li><li>Current: 0.2 Amps</li></ul></li><li>Durability &amp; Standards<ul style="list-style-type: none"><li>Mechanical vibration: 8.5G</li><li>Mechanical shock: 51G</li><li>Operating temperature: -40 to +70°C</li><li>Video output signal: H264 or H.265</li><li>Network protocol: MDR5, ONVIF, TCP/IP, HTTP, DHCP, NTP, FTP</li><li>CE marked</li><li>E-Marked: UNECE R10 compliant</li><li>FCC approved</li><li>IC approved</li></ul></li></ul></div></div>	

IP EXPANSION MODULES	
IP-EM4 - PON 4-channel switch	5860
IP-EM8 - PON 8-channel switch	5861
<div><div></div><div><ul style="list-style-type: none"><li>12-24Vdc</li><li>4 or 8 IP camera inputs</li><li>Size (WxHxD) IP-EM4: 149 x 44 x 127mm IP-EM8: 174 x 54 x 129.5mm</li><li>3 year warranty</li></ul></div></div> <div><div><ul style="list-style-type: none"><li>Features<ul style="list-style-type: none"><li>Expands the channel capability of the MDR by enabling the addition of IP cameras: IP-EM4 - adds 4 channels to MDR-508 IP-EM8 - adds 8 channels to MDR-508 IP-EM4 - adds 4 channels to MDR-644</li></ul></li></ul></div><div><ul style="list-style-type: none"><li>Power<ul style="list-style-type: none"><li>Power consumption: 3 Watts</li></ul></li><li>Durability &amp; Standards<ul style="list-style-type: none"><li>Mechanical vibration: 2.3G</li><li>Mechanical shock: 150G</li><li>Operating temperature: -40 to +70°C</li><li>CE marked</li><li>E-Marked: UNECE R10 compliant</li><li>FCC approved</li><li>IC approved</li></ul></li></ul></div></div>	

IP CAMERA ACCESSORIES	
IP-EC-1 - CAT5E Ethernet cable 1 metre	5865
IP-EC-5 - CAT5E Ethernet cable 5 metre	5866
IP-EM-PC - MDR-PON Power cable	5864
Included with IP-EM4 and IP-EM8	
IP-L601 - IP Camera extension cable 1 metre	5867
IP-L603 - IP Camera extension cable 3 metre	5902
IP-L605 - IP Camera extension cable 5 metre	5903
IP-L610 - IP Camera extension cable 10 metre	5982
IP-L615 - IP Camera extension cable 15 metre	5904
IP-L620 - IP Camera extension cable 20 metre	5983
IP-L630 - IP Camera extension cable 30 metre	5984
IP-1XXX-PC - IP Power and Ethernet cable	5985
To connect a single camera to MDR 500 without a PON switch. Not required for 644 and 641 series MDR.	

**WARNING:** There is a latency (time lag) in all digital video transmission, including IP Cameras. Although this time lag is small (~800ms IP1100C ~250ms IP1000C & IP1200C ), it is unacceptable for a camera that a driver is using as a safety and manoeuvring aid. Brigade IP cameras are an excellent choice for general monitoring (eg bus interior, doors, luggage compartment) and recording purposes, but should not be used as a driver aid for manoeuvring or blind-spot monitoring. Analogue cameras are still the best choice for safety critical manoeuvring and blind spot monitoring applications.

Elite Range Camera/monitor compatibility

KEY	ELITE MONITORS	SELECT MONITORS	
	BE-970WFM BE-970WM BE-870LM BE-870FM	VBV-770HFM VBV-770HM VBV-7104HFM VBV-7104HM	VBV-770M VBV-750M
✓ = Compatible			
✓ AC-007 = Compatible with adapter(s) shown			
ELITE BE-810C Shutter camera	✓	✓ AC-007 & SC-1000-ECU	
All other ELITE cameras	✓	✓ AC-007	

Model

Part No:

7" IP69K QUAD MONITOR

ELITE

BE-970WFM - Waterproof 7" Quad digital LCD monitor

3560



- 12-24Vdc
- IP69K
- Size (WxHxD)  
194 x 124 x 48mm
- 5 year warranty

7.0"

4

2

Speaker

Lock

Diagonal

Check

Down Arrow

Blank

Grid

Grid

Grid

Grid

Grid

Plus additional in-built image options

**Features**

- 4 camera inputs
- Shutter camera compatible (inputs 1&2)
- Backlit touch screen button panel
- 'Button-lock' anti-tamper feature
- 5 Auto-triggers
- Mirror / Normal switching from menu
- On screen distance and vertical line markers
- Audio
- Speed switch trigger to turn monitor on/off or trigger a split screen
- Sun shield
- Multi-lingual menus
- Auto-switching PAL / NTSC

**Picture Quality**

- LED backlighting (gives 20,000 hours life)
- Anti-glare screen
- Resolution: 800 x 480
- Contrast ratio: 500:1
- Brightness: 500cd/m²
- Viewing angles: Side 65° x Top 50° x Bottom 60°

**Power**

- Power consumption: min 28 Watts
- Current: max 2.15 Amps

**Durability & Standards**

- Aluminium die-cast casing
- Mechanical vibration: 10G
- Mechanical shock: 100G
- Operating temperature: -40 to +75°C
- CE marked
- E-Marked: UNECE R10 compliant
- ISO 16750
- ISO 20653: 2006
- HALT tested

7" IP69K MONITOR

ELITE

BE-970WM - Waterproof 7" Digital LCD monitor

3351



- 12-24Vdc
- IP69K
- Size (WxHxD)  
194 x 124 x 48mm
- 5 year warranty

7.0"

2

2

Speaker

Lock

Diagonal

Check

Down Arrow

**Features**

- 2 Camera inputs
- Shutter camera compatible - both inputs
- Backlit touch screen button panel
- 'Button-lock' anti-tamper feature
- 2 Auto-triggers
- Mirror / Normal switching from menu
- On screen distance and vertical line markers
- Audio
- Sun shield
- Multi-lingual menus
- Auto-switching PAL / NTSC

**Picture Quality**

- LED backlighting (gives 20,000 hours life)
- Anti-glare screen
- Resolution: 800 x 480
- Contrast ratio: 500:1
- Brightness: 500cd/m²
- Viewing angles: Side 65° x Top 50° x Bottom 60°

**Power**

- Power consumption: 11 Watts
- Current: 0.9 Amps

**Durability & Standards**

- Aluminium die-cast casing
- Mechanical vibration: 20G
- Mechanical shock: 100G
- Operating temperature: -40 to +70°C
- CE marked
- E-Marked: UNECE R10 compliant
- ISO 16750
- ISO 13766: 2006
- HALT tested

Model

Part No:

7" MONITOR

ELITE

BE-870HM - 7" High Definition LCD monitor

6380



- 12-24Vdc
- Size (WxHxD)  
194 x 124 x 33mm
- 5 year warranty

7.0"

2

2

Speaker

Lock

Diagonal

Check

Down Arrow

**Features**

- 2 Camera inputs
- Shutter camera compatible
- 'Button-lock' anti tamper feature
- 2 Auto-triggers with configurable trigger-off delays
- Mirror / Normal switching from menu
- On-screen distance and vertical line markers
- Audio
- Sun shield
- Auto-dimmer and keypad illumination
- Multi-lingual menus
- Auto-switching PAL / NTSC

**Picture Quality**

- LED backlighting (gives 20,000 hours life)
- Anti-glare screen

- Resolution: 1024 x 600
- Contrast ratio: 800:1
- Brightness: 500cd/m²
- Viewing angles: Side 80° x Top 60° x Bottom 70°

**Power**

- Power consumption: 11.7 Watts
- Current: 0.975 Amp

**Durability & Standards**

- Mechanical vibration: 3G
- Mechanical shock: 51G
- Operating temperature: -40 to +70°C
- CE marked
- E-Marked: UNECE R10 compliant
- FCC approved
- IC approved

7" QUAD MONITOR

ELITE

BE-870FM - 7" Digital LCD monitor

2146



- 12-24Vdc
- Size (WxHxD)  
197 x 135 x 30mm
- 5 year warranty

7.0"

4

2

Speaker

Lock

Diagonal

Check

Down Arrow

Blank

Grid

Grid

Grid

Grid

Grid

Plus additional in-built image options

**Features**

- 4 camera inputs
- 5 Auto-triggers
- Shutter camera compatible
- 'Button-lock' anti-tamper feature
- Mirror / Normal switching from menu
- On-screen distance & vertical line markers
- Audio
- Sun shield
- Auto-dimmer
- Multi-lingual menus
- Auto-switching PAL / NTSC

**Picture Quality**

- LED backlighting (gives 20,000 hours life)
- Anti-glare screen
- Resolution: 800 x 480
- Contrast ratio: 500:1
- Brightness: 4000cd/m²
- Viewing angles: Side 70° x Top 50° x Bottom 70°

**Power**

- Power consumption: 21 Watts
- Current: 1.9 Amps

**Durability & Standards**

- Mechanical vibration: 6G
- Mechanical shock: 100G
- Operating temperature: -40 to +70°C
- CE marked
- E-Marked: UNECE R10 compliant
- HALT tested

7" MONITOR

ELITE

BE-870LM - 7" Digital LCD monitor

2705



- 12-24Vdc
- Size (WxHxD)  
197 x 128 x 34mm
- 5 year warranty

7.0"

2

2

Speaker

Lock

Diagonal

Check

Down Arrow

Blank

Grid

Grid

Grid

Grid

Grid

R46 APPROVED

**Features**

- 2 Camera inputs
- Shutter camera compatible - both inputs
- 'Button-lock' anti tamper feature
- 2 Auto-triggers with configurable trigger-off delays
- Mirror / Normal switching from menu
- On-screen distance and vertical line markers
- Audio
- Sun shield
- Auto-dimmer and keypad illumination
- Multi-lingual menus
- Auto-switching PAL / NTSC

**Picture Quality**

- LED backlighting (gives 20,000 hours life)
- Anti-glare screen

- Resolution: 800 x 480
- Contrast ratio: 500:1
- Brightness: 400cd/m²
- Viewing angles: Side 70° x Top 50° x Bottom 70°

**Power**

- Power consumption: 12 Watts
- Current: 1 Amp

**Durability & Standards**

- Mechanical vibration: 2.5G
- Mechanical shock: 51G
- Operating temperature: -30 to +70°C
- CE marked
- E-Marked: UNECE R10 compliant
- Camera monitor system R46 approved



Select Range Camera/monitor compatibility

KEY	ELITE MONITORS	SELECT MONITORS	
	BE-970WFM BE-970WM BE-870LM BE-870FM	VBV-770HFM VBV-770HM VBV-7104HFM VBV-7104HM	VBV-770M VBV-750M
✓ = Compatible ✓ AC-006 = Compatible with adapter(s) shown			
SELECT VBV-710C Shutter	✓ AC-006	✓	
All other SELECT cameras	✓ AC-006	✓	

Model

Part No:

AHD 10.4" QUAD MONITOR

SELECT HD

VBV-7104HFM - 10.4" High Definition LCD monitor

6057



- 12-24Vdc
- Size (WxHxD)  
267 x 193 x 30mm
- 3 year warranty

10.4"

4

5

Speaker

Lock

Diagonal

Check

Down Arrow

Image Options

Image Options

Image Options

Image Options

Image Options

Plus additional in-built image options

Features

- AHD and CVBS compatible
- High-definition, high contrast, wide view angle
- Configurable view options
- 4 camera inputs
- 'Button-lock' anti-tamper feature
- 5 Auto-triggers
- Configurable trigger delay
- Mirror / Normal switching from menu
- On-screen distance markers
- Built-in speaker
- Sun shield
- Multi-lingual menus
- Auto-switching AHD 1.0 / AHD 2.0 / PAL / NTSC

Picture Quality

- LED backlighting (gives 30,000 hours life)
- Anti-glare screen

Power

- Resolution: 1024 x 768
- Contrast ratio: 900:1
- Brightness: 500cd/m<sup>2</sup>
- Viewing angles: Side 85° x Top 85° x Bottom 85°

Durability & Standards

- Power consumption: 31.2 Watts
- Current: 2.6 Amps
- Mechanical vibration: 4G
- Mechanical shock: 51G
- Operating temperature: -20 to +70°C
- CE marked
- E-Marked: UNECE R10 compliant
- HALT tested
- FCC approved
- IC approved

AHD 7" MONITOR

SELECT HD

VBV-770HFM - 7" High Definition LCD monitor

7204



- 12-24Vdc
- Size (WxHxD)  
196 x 118 x 28mm
- 3 year warranty

7.0"

4

5

Speaker

Lock

Diagonal

Check

Down Arrow

Image Options

Image Options

Image Options

Image Options

Image Options

Plus additional in-built image options

Features

- AHD and CVBS compatible
- High-definition, high contrast, wide view angle
- Configurable views
- 4 camera inputs
- 5 Auto-triggers
- Mirror / Normal switching from menu
- 'Button lock' anti-tamper feature
- On-screen distance markers
- Audio
- Sun shield
- Auto-dimmer
- Multi-lingual menus
- Auto-switching AHD 1.0 / AHD 2.0 / PAL / NTSC

Picture Quality

- LED backlighting (gives 20,000 hours life)
- Anti-glare screen

Power

- Resolution: 1024 x 600
- Contrast ratio: 700:1
- Brightness: 650cd/m<sup>2</sup>
- Viewing angles: Side 85° x Top 85° x Bottom 85°

Durability & Standards

- Power consumption: 27.6 Watts
- Current: 2.3 Amps
- Mechanical vibration: 3G
- Mechanical shock: 51G
- Operating temperature: -20 to +70°C
- CE marked
- E-Marked: UNECE R10 compliant
- UKCA marked
- HALT tested
- FCC approved
- IC approved

Model

Part No:

AHD 7" MONITOR

SELECT HD

VBV-770HM - 7" High Definition LCD monitor

5611



- 12-24Vdc
- Size (WxHxD)  
196 x 118 x 26mm
- 3 year warranty

7.0"

3

5

Speaker

Lock

Diagonal

Check

Down Arrow

Image Options

Image Options

Image Options

Image Options

Image Options

Plus additional in-built image options

Features

- AHD and CVBS compatible
- High-definition, high contrast, wide view angle
- 3 camera inputs
- 3 Auto-triggers
- Mirror / Normal switching from menu
- 'Button lock' anti-tamper feature
- On-screen distance markers
- Audio
- Sun shield
- Auto-dimmer
- Multi-lingual menus
- Auto-switching AHD 1.0 / AHD 2.0 / PAL / NTSC

Picture Quality

- LED backlighting (gives 20,000 hours life)

Power

- Anti-glare screen
- Resolution: 1024 x 600
- Contrast ratio: 700:1
- Brightness: 500cd/m<sup>2</sup>
- Viewing angles: Side 85° x Top 85° x Bottom 85°

Durability & Standards

- Power consumption: 10 Watts
- Current: 0.8 Amps
- Mechanical vibration: 4G
- Mechanical shock: 51G
- Operating temperature: -30 to +70°C
- CE marked
- E-Marked: UNECE R10 compliant
- HALT tested
- FCC approved
- IC approved

4.3" MIRROR MONITOR

ESSENTIAL

VBV-243M - 4.3" Digital Mirror monitor

5323



- 12-24Vdc
- Size (WxDxH)  
280 x 92 x 30.5mm
- 1 year warranty

4.3"

2

5

Speaker

Lock

Diagonal

Check

Down Arrow

Image Options

Image Options

Image Options

Image Options

Image Options

Plus additional in-built image options

Features

- On screen multi-lingual display menu
- Digital LCD panel
- 2 Auto-trigger
- Auto dimmer
- Illuminated keypad
- On-screen distance markers
- TV system: PAL / NTSC

Picture Quality

- Resolution: 480 x 272
- Contrast ratio: 600:1
- Brightness: 1000cd/m<sup>2</sup>

Power

- Viewing angles: Side 65° x Top 60° x Bottom 50°
- Power consumption: 6.6 Watts
- Current: 0.53 Amps

Durability & Standards

- Vibration rating: 6G
- Operating temperature: -20 to +70°C
- CE marked
- FCC approved

CAMERA MONITOR SYSTEM ANCILLARIES

SELECT

BMM-019-ARM - 68mm replacement arm (Select range)

3348



- 68mm mounting bracket arm
- Allows monitor to be dash-mounted in portrait position

A further range of camera/monitor brackets and mounting adapters is available. Please contact us for details

ModelPart No:

CAMERA MONITOR SYSTEMSELITE

BE-870L-000 - Single camera monitor system for rigid vehicles3231



- BE-870LM - 7" monitor2705
- BE-800C Camera1623
- BE-L120 - 20m cable0801

See individual products for detailed specifications and warranties

R46  
APPROVED

BE-870L-100 - Single shutter camera monitor system for rigid vehicles4032



- BE-870LM - 7" monitor2705
- BE-810C Shutter camera1242
- BE-L120 - 20m cable0801

See individual products for detailed specifications and warranties

AHD CAMERA MONITOR SYSTEMSELECT HD

VBV-770H-7000 - Single AHD camera monitor system for rigid vehicles6111



- VBV-770HM - 7" AHD monitor5611
- VBV-7100C - Camera5466
- VBV-H420 - AHD 20m cable5513

See individual products for detailed specifications and warranties

VBV-770H-3100 - Single AHD camera monitor system for small rigid vehicles7680



- VBV-770HM - 7" AHD monitor5611
- VBV-3100C - AHD Camera7143
- VBV-H410 - AHD 10m cable5516

See individual products for detailed specifications and warranties

VBV-770H-3200 - Single AHD camera monitor system for rigid vehicles7681



- VBV-770HM - 7" AHD monitor5611
- VBV-3100C - AHD Camera7143
- VBV-H420 - AHD 20m cable5513

See individual products for detailed specifications and warranties

ModelPart No:

AHD CAMERA MONITOR SYSTEMESSENTIAL

VBV-6172-000 - High Definition Camera monitor system7595



- Camera Viewing angle (HxVxD)106 x 56 x 120°
- IP69K camera
- Camera Size (WxHxD)76 x 59 x 55mm
- Monitor Size (WxHxD)194 x 118 x 25mm
- 1 year warranty



- Contents**
- 1 x VBV-6170M monitor
  - 1 x monitor sunshield
  - 1 x monitor bracket
  - 1 x VBV-6132C camera
  - 1 x 20m VBV-L4120 extension cable
  - Fitting kit
- Features**
- AHD 1080P/720P/CVBS
  - 2 camera inputs
  - 1 auto trigger
  - Multi-lingual menus
  - PAL & NTSC (Switching cable)
- Picture Quality**
- Monitor resolution: 1024X600
  - Camera resolution: 1920x1080 AHD

- Contrast ratio: 500:1
- Brightness: 400 cd/m²
- Monitor viewing angles: Side 70° x Top 45° Bottom 65°

- Power**
- Power consumption: 4.2 Watts
  - Current: 0.4 Amps

- Durability & Standards**
- Mechanical vibration: 5.9G
  - Operating temperature: -20 to +70°C
  - CE marked
  - FCC approved



CAMERA MONITOR SYSTEMESSENTIAL

VBV-650-000 - PAL Camera monitor system4765  
VBV-650-000N - NTSC Camera monitor system4766



- Camera Viewing angle (HxVxD)81 x 59 x 106° PAL81 x 59 x 108° NTSC
- Camera IP67
- Camera Size (WxHxD)65 x 59 x 55mm
- Monitor Size (WxHxD)150 x 99 x 31mm
- 1 year warranty



- Contents**
- 1 x VBV-650M monitor
  - 1 x monitor bracket
  - 1 x VBV-620C camera PAL or VBV-621C camera NTSC
  - 1 x 20m VBV-L4020 extension cable
  - Fitting kit
- Camera Features**
- Mirror view
  - CMOS
  - TV Lines: 420
- Monitor Features**
- 1 camera input

- Picture Quality**
- Monitor resolution: 640x480
  - Monitor viewing angles: Side 70° x Top 50° Bottom 70°

- Power**
- Power consumption: 2 Watts
































- Durability & Standards**
- Operating temperature: -10 to +70°C





























ModelPart No:

BRIGADE CAMERA MONITOR ADAPTERS

	 	AC-006 - Connects Select camera (not shutter) to Elite cable	1983
	 	AC-007 - Connects Select monitor to Elite cable	1984
	 	AC-014 - Connects Elite camera to Select cable	2094
	 	AC-014(5M) - Connects Elite camera to Select cable, 5m long	5049
	 	AC-020 - Connects Elite monitor to Select cable	2590
	 	AC-055(5M) - 5-pin to 4-pin Select cable, 5m long	4267
	  	AC-306 - Splitter cable connects 1 x (Non HD) Select camera to MDR & monitor	4904
	  	AC-307 - Splitter cable connects 1 x Elite camera to MDR & Monitor	4905
	   	AC-H305 - Splitter cable connects 1 x BN360-300 camera to MDR & ECU	6648

MISCELLANEOUS CAMERA MONITOR ADAPTERS

	 	AC-056 - Connects Select camera to Orlaco monitor	4401
	 	AC-062 - Connects Elite camera to Orlaco monitor	4691
	 	AC-063 - Connects Elite camera to Orlaco monitor, screw fit	4925
	 	AC-066 - Connects Orlaco camera to Elite monitor	5027
	 	AC-067 - Connects Orlaco camera to Select monitor	5028
	  	AC-24-12(009) - In-line 24/12Vdc converter - Select camera to Mekra 507405 monitor	4926
	   	AC-308 - Splitter cable to connect MDR to Mekra 507405 CMS	4949




















ModelPart No:


OEM CAMERA MONITOR ADAPTERS


	 	AC-041 - Connects Elite camera to John Deere 7-pin amp output	4245
	 	AC-042 - Connects Select camera to John Deere 7-pin amp output	4246
	 	AC-044 - Connects Select camera to Molex M12 (Fendt)	4279
	 	AC-045 - Connects Elite camera to Molex M12 (Fendt)	4280
	  	AC-068 - Connects Select camera to MAN Harman unit with camera prep	5234
	  	AC-069 - Connects Select camera to MAN/Scania Harman unit without camera prep	5318
	  	AC-24-12(002) - In-line 24/12Vdc converter - Elite camera to Mercedes monitor	4266
	  	AC-24-12(006) - In-line 24/12Vdc converter - Select camera to Volvo FH(4) & FM(4)	4719
	  	AC-24-12(007) - In-line 24/12Vdc converter - Select camera to Iveco connect system	4762
	  	AC-24-12(008) - In-line 24/12Vdc converter - Select camera to Mercedes Sprinter	4763
	  	AC-24-12(010) - In-line 24/12Vdc converter - Select camera to Mercedes Actros/Arocs 2019> with J9P prep'	5907


A further range of OEM-specific adapters to connect Brigade cameras to factory-fit monitors is available


GENERAL CAMERA MONITOR ADAPTERS


	 	AC-016 - Connects AV to Camera input of Elite monitor	2150
	  	AC-019 - Connects Elite camera to male phono (video only)	2589
	  	AC-024 - Connects AV to Select monitor (video & audio input, 12Vdc output)	3183
	  	AC-028 - Connects AV to Select cable	3335
	  	AC-064 - Connects Elite camera to BNC adapter cable	4948

Model	Part No:	
AI CAMERA CABLES		AI
	VBV-AI801 - 1 metre AI Camera Extension Cable	7489
	VBV-AI805 - 5 metre AI Camera Extension Cable	7490
	VBV-AI810 - 10 metre AI Camera Extension Cable	7508
	VBV-AI815 - 15 metre AI Camera Extension Cable	7509
	VBV-AI820 - 20 metre AI Camera Extension Cable	7491
	AC-24-12(011) - Power adapter for AI camera	5760

ELITE HD CAMERA CABLES		ELITE HD
	BE-H030 - 30 metre extension cable	7376
	BE-H025 - 25 metre extension cable	7375
	BE-H020 - 20 metre extension cable	7374
	BE-H015 - 15 metre extension cable	7373
	BE-H012 - 12 metre extension cable	7372
	BE-H010 - 10 metre extension cable	7371
	BE-H008 - 8 metre extension cable	7370
	BE-H005 - 5 metre extension cable	7369
	BE-H003 - 3 metre extension cable	7368
	BE-H001 - 1 metre extension cable	7367
	BE-H0003 - 0.5 metre extension cable	7366

CAMERA TO MONITOR CABLES		ELITE
	BE-L130 - 30 metre cable	0800
	BE-L120 - 20 metre cable	0801
	BE-L115 - 15 metre cable	0802
	BE-L112 - 12 metre cable	3008
	BE-L110 - 10 metre cable	0803
	BE-L108 - 8 metre cable	3007
	BE-L105 - 5 metre cable	0804
	BE-L101 - 1 metre cable	5042
	BE-L1003 - 0.3 metre cable	2797

ELITE CAMERA EXTENSION CABLES		ELITE
	BE-X025 - 25 metre extension cable	1907
	BE-X020 - 20 metre extension cable	1143
	BE-X015 - 15 metre extension cable	2101
	BE-X010 - 10 metre extension cable	2100
	BE-X005 - 5 metre extension cable	2099
	BE-X003 - 3 metre extension cable	0805

Model	Part No:	
SELECT AHD CAMERA CABLES		SELECT HD
	VBV-H430 - 30 metre cable	5511
	VBV-H425 - 25 metre cable	5512
	VBV-H420 - 20 metre cable	5513
	VBV-H415 - 15 metre cable	5514
	VBV-H412 - 12 metre cable	5515
	VBV-H410 - 10 metre cable	5516
	VBV-H407 - 7 metre cable	5517
	VBV-H406 - 6 metre cable	5518
	VBV-H405 - 5 metre cable	5519
	VBV-H404 - 4 metre cable	5520
	VBV-H403 - 3 metre cable	5521
	VBV-H4025 - 2.5 metre cable	5522
	VBV-H4005 - 0.5 metre cable	5523




Model

Part No:

TRUCK/TRAILER CABLE KIT

ELITE



SK-31E - Truck and trailer cable kit - unique pin layout  
Inclusive of SK-31E-T - Trailer kit

• BE-L110 - 10m cable for cab

0803

• SP-7A - 7-pin bulkhead socket for cab & cab-end camera connector (unique pin layout)

1827

• SC-7 - Coiled cable with 7-pin plugs (unique pin layout)

1829

SK-31E-T - Trailer only kit




1886

• BE-X020 - 20m extension cable for trailer

1143

• SP-7B - 7-pin bulkhead socket for trailer & trailer-end camera connector (unique pin layout)


1828



SP-7A   SC-7   SP-7B

TRUCK/TRAILER CABLE KIT

ELITE



SK-30E - Truck and trailer cable kit  
Inclusive of SK-30E-T - Trailer kit

• BE-L110 - 10m cable for cab

0803

• SP-07C - 7-pin bulkhead socket for cab & cab-end camera connector

7564

• SC-07 - Coiled cable with 7-pin plugs

1046

SK-30E-T - Trailer only kit




1885

• BE-X020 - 20m extension cable for trailer

1143

• SP-07T - 7-pin bulkhead socket for trailer & trailer-end camera connector


7565



SP-07C   SC-07   SP-07T

TRUCK/TRAILER CABLE KIT

ELITE



SK-15-01 - Truck and trailer cable kit for three cameras

• SP-15A-01 - 15-pin bulkhead socket for cab & 3 cab-end camera connectors




3423

• SP-15B-01 - 15-pin bulkhead socket for trailer & 3 trailer-end camera connectors

3422

• SC-15-01 - Coiled shielded cable with 15-pin plugs


3268



SP-15A-01   SC-15-01   SP-15B-01

TRUCK/TRAILER CABLE KIT

ELITE



SK-15-04 - Truck and trailer cable kit for single camera & single buzzer ultrasonic detection system

• SP-15A-04 - 15-pin bulkhead socket for cab & cab-end camera connector plus stripped wires and display/buzzer connection for Ultrasonics




3955

• SP-15B-04 - 15-pin bulkhead socket for trailer & trailer-end camera connector plus stripped wires and display/ buzzer connection for Ultrasonics

3956

• SC-15-01 - Coiled shielded cable with 15-pin plugs

3268




SP-15A-04   SC-15-01   SP-15B-04

Model

Part No:

TRUCK/DRAWBAR TRAILER CABLE KIT

ELITE



SK-50E - Truck and drawbar trailer cable kit for two cameras - unique pin layout  
Inclusive of SK-50E-A Truck kit and SK-31E-T trailer kit

SK-50E-A - Truck only kit

1879

SK-31E-T - Trailer only kit

1886

• BE-L115 - 15m cable for truck

0802

• BE-X005 - 5m extension cable for truck camera

2099

• CS-020 - Two way camera selector

1571

• SP-7A - 7-pin bulkhead socket for trailer & trailer-end camera connector (unique pin layout)

7566

• SC-7 - Coiled cable with 7-pin plugs (unique pin layout)




1829

• BE-X020 - 20m extension cable for trailer camera

1143

• SP-7B - 7-pin bulkhead socket for cab & cab-end camera connector (unique pin layout)

7567



SP-7A   SC-7   SP-7B

28

www.brigade-electronics.com   Tel +44(0) 1322 420300   sales@brigade-electronics.com

29

ModelPart No:

TRUCK/TRAILER CABLE KITSELECT

SK-15-05 - Truck and trailer cable kit for 3-camera Backeye®3605066



- SP-15A-05 - 15-pin bulkhead socket for cab & cab-end connector plus 3x connections for Backeye®360 Select 5064
- SP-15B-05 15-pin bulkhead socket for trailer & trailer-end connector plus 3x connections for Backeye®360 Select 5065
- SC-15-01 Coiled shielded cable with 15-pin plugs 3268

TRUCK/ DRAWBAR TRAILER CABLE KITSELECT

VSK-50E - Truck and drawbar trailer cable kit for two cameras2540  
Inclusive of VSK-50E-A Truck kit and VSK-30E-T Trailer kit



- |   |             |  |             |
|---|-------------|--|-------------|
| <b>VSK-50E-A - Truck only kit</b>                           | <b>2541</b> | <b>VSK-30E-T - Trailer only kit</b>                  | <b>2542</b> |
| • VBV-L420 - 20m cable for truck                            | 1380        | • VBV-L420 - 20m cable for trailer                   | 1380        |
| • VBV-L405 - 5m camera cable for truck camera               | 1499        | • VSP-47B - 7-pin camera bulkhead socket for trailer | 1846        |
| • VCS-020 - Two-way camera selector                         | 1844        |  |             |
| • 1 x VSP-47A - 7-pin camera bulkhead socket for truck rear | 1847        |  |             |
| • SC-07-24S - Coiled cable with 7-pin sockets               | 1227        |  |             |

TRUCK/DRAWBAR TRAILER CABLE KITSELECT

VSK-505E - Truck and drawbar trailer cable kit for two Select shutter cameras 4005



- |  |      |  |      |
|--|------|--|------|
| • VBV-L420 - 20m cable for truck                     | 1380 | • VSP-57A 7-Pin bulhead socket for cab & cab-end camera connector          | 3869 |
| • VBV-L520 - 20m camera cable for truck camera       | 3664 | • VSP-57B 7-pin bulkhead socket for trailer & trailer-end camera connector | 3870 |
| • VBV-L505 - 5m camera cable for cab                 | 4001 | • SC-07-24S - Coiled cable with 7-pin plugs                                | 1227 |
| • VCS-020 - Two-way camera selector                  | 1844 |  |      |
| • 2 x AC-035 - 5-pin to 4-pin shutter camera adapter | 3702 |  |      |

ModelPart No:

TRUCK/TRAILER CABLE KITSELECT

VSK-31E - Truck and trailer cable kit - unique pin layout2539  
Inclusive of VSK-31E-T - Trailer kit



- |  |      |  |             |
|--|------|--|-------------|
| • VBV-L410 - 10m cable for cab   | 1386 | <b>VSK-31E-T -Trailer only kit</b>   | <b>2543</b> |
| • SP-7A - 7-pin bulkhead socket for cab & cab-end camera connector (unique pin layout) | 1827 | • VBV-L420 - 20m cable for trailer   | 1380        |
| • AC-014 - Adapter cable   | 2094 | • AC-006 - Adapter cable   | 1983        |
| • SC-7 - Coiled cable with 7-pin plugs (unique pin layout)                             | 1829 | • SP-7B - 7-pin bulkhead socket for trailer & trailer-end camera connector (unique pin layout) | 1828        |

TRUCK/TRAILER CABLE KITSELECT

VSK-30E - Truck and trailer cable kit2538  
Inclusive of SK-30E-T - Trailer only kit



- |  |      |  |             |
|--|------|--|-------------|
| • VBV-L410 - 10m cable for cab                                       | 1386 | <b>VSK-30E-T -Trailer only kit</b>   | <b>2542</b> |
| • VSP-47A - 7-pin bulkhead socket for cab & cab-end camera connector | 1847 | • VBV-L420 - 20m extension cable for trailer                                 | 1380        |
| • SC-07-24S -Coiled cable with type 24S 7-pin plugs                  | 1227 | • VSP-47B - 7-pin bulkhead socket for trailer & trailer-end camera connector | 1846        |

TRUCK/TRAILER CABLE KITSELECT

VSK-305E - Truck and trailer cable kit for Select shutter camera 3871



- |  |      |  |      |
|--|------|--|------|
| • VBV-L510 10m cable for cab                                       | 3663 | • VSP-57B 7-pin bulkhead socket for trailer & trailer-end camera connector | 3870 |
| • VBV-L520 20m cable for trailer                                   | 3664 | • SC-07-24S - Coiled cable with type 24S 7-pin plugs                       | 1227 |
| • VSP-57A 7-pin bulkhead socket for cab & cab-end camera connector | 3869 |  |      |



Model	Part No:
DIGITAL WIRELESS CONNECTION SYSTEM	
DW-2000-TX - Digital Wireless Transmitter	7088
DW-2000-RX - Digital Wireless Receiver	7089



<ul style="list-style-type: none"><li>• 12-24Vdc</li><li>• 1 camera input</li><li>• IP69K</li><li>• Size (WxHxD) 105 x 106 x 25.2mm</li><li>• 3 year warranty</li></ul>	<b>Features</b> <ul style="list-style-type: none"><li>• CVBS, AHD 720P and 1080P compatible</li><li>• Image Latency: 200 milliseconds</li><li>• No need for retractable coiled cables</li><li>• Reduces installation time</li><li>• Re-pair facility allows for interchangeable trailers</li><li>• Triggered by reverse gear</li><li>• Up to two transmitters can be paired to one receiver</li><li>• TV System AUTO</li><li>• Secure connection</li><li>• Easy 1-button pairing</li><li>• VBV Select range connectors</li></ul>	<b>Power</b> <ul style="list-style-type: none"><li>• Power consumption: TX: 1.04 Watts RX: 0.12 Watts</li></ul> <b>Durability &amp; Standards</b> <ul style="list-style-type: none"><li>• Operating temperature: -20 to +70°C</li><li>• CE marked</li><li>• FCC approved</li></ul> <p>Adapter required to connect Elite range camera and monitor.</p>
---	--	---

CAMERA MONITOR SYSTEM ANCILLARIES	ELITE
EDM-50 - Multi-camera module and screen splitter (Elite range connectors)	2152



<ul style="list-style-type: none"><li>• 12-24Vdc</li><li>• 4 camera inputs</li><li>• Size (WxHxD) 154 x 28 x 105mm</li><li>• 2 year warranty</li></ul> <div><div>Single</div><div>Split</div><div>Triple</div><div>Quad</div><div>Picture in picture</div></div> <p>Plus additional in-built image options</p>	<b>Features</b> <ul style="list-style-type: none"><li>• Shutter camera compatible (inputs 1,2&amp;3)</li><li>• AV input to accept DVD, sat nav or other add-ons</li><li>• 5 manual or auto-triggers for each camera</li><li>• On screen distance markers</li><li>• Mirror / Normal image switch for each camera</li><li>• Selectable camera audio</li><li>• Auto-scanning function</li><li>• Adapter required for Select range monitors</li></ul>	<b>Power</b> <ul style="list-style-type: none"><li>• Power consumption: 20 Watts</li><li>• Current: 2A</li></ul> <b>Durability &amp; Standards</b> <ul style="list-style-type: none"><li>• Mechanical vibration: 5G</li><li>• Operating temperature: -25 to +70°C</li><li>• CE marked</li><li>• E-Marked: UNECE R10 compliant</li></ul> <p>Not AHD compatible</p>
--	---	---

CAMERA MONITOR SYSTEM ANCILLARIES	ELITE
SC-1000-ECU - Shutter camera module	3666



<ul style="list-style-type: none"><li>• Allows BE-810C shutter camera to function on non-shutter enabled inputs on Elite range monitors (using Elite range cables)</li><li>• Adapter required for Select range monitors</li></ul>	<ul style="list-style-type: none"><li>• Current: 2A</li><li>• CE marked</li><li>• E-Marked: UNECE R10 compliant</li><li>• 2 year warranty</li></ul>
---	---

Model	Part No:
CAMERA MONITOR SYSTEM ANCILLARIES	
SS-H002 -High Definition Twin camera screen splitter (Select range connectors)	7178



<ul style="list-style-type: none"><li>• 12-24Vdc</li><li>• 2 camera inputs</li><li>• Size (WxHxD) 147 x 37 x 78mm</li><li>• 2 year warranty</li></ul> <div><div>Single</div><div>Split</div></div> <p>In-built image options</p>	<b>Features</b> <ul style="list-style-type: none"><li>• AHD and CVBS compatible</li><li>• Offers split-screen option for monitors without in-built functionality</li><li>• 3 trigger inputs per camera</li><li>• Shutter camera compatible with adapters (Elite - TS-1000-ECU) (Select - AC-035)</li><li>• TV System: PAL / NTSC/AHD1/AHD2</li><li>• Manual Mirror/Normal switching - choose from horizontal normal/mirror or vertical normal/flip</li><li>• Short circuit protection on camera inputs</li><li>• Reverse polarity protected</li></ul> <p>Adapter required for Elite range monitors</p>	<b>Power</b> <ul style="list-style-type: none"><li>• Current: 0.8 Amps</li></ul> <b>Durability &amp; Standards</b> <ul style="list-style-type: none"><li>• Mechanical vibration: 3G</li><li>• Mechanical shock: 51G</li><li>• Operating temperature: -30 to +80°C</li><li>• CE marked</li><li>• E-Marked: UNECE R10 compliant</li><li>• UKCA marked</li><li>• FCC approved</li><li>• IC approved</li></ul>
--	--	--

CAMERA MONITOR SYSTEM ANCILLARIES	
LS-60-A - Speed switch	4851



<ul style="list-style-type: none"><li>• 12-24Vdc</li><li>• Auto-triggers safety equipment at the designated speed</li><li>• Size (WxHxD) 44 x 16 x 64mm</li><li>• 2 year warranty</li></ul>	<b>Features</b> <ul style="list-style-type: none"><li>• Normally closed - safety device on by default, turning off at designated speed</li><li>• 10 speed threshold settings</li><li>• Compact size</li><li>• Easy to install and set up</li><li>• Short circuit protection on camera inputs</li><li>• Reverse polarity protected</li></ul> <b>Power</b> <ul style="list-style-type: none"><li>• Power consumption: 21.6 Watts</li><li>• Max current: 1.8 Amps</li><li>• Switch Output max. current: 1.2 Amps</li></ul>	<b>Durability &amp; Standards</b> <ul style="list-style-type: none"><li>• Mechanical vibration: 10G</li><li>• Mechanical shock: 50G</li><li>• Operating temperature: -40 to +85°C</li><li>• CE marked</li><li>• E-Marked: UNECE R10 compliant</li></ul> <b>Notes:</b> <p>A relay is required if connected to a device that is higher than 1.2 Amps</p>
---	---	--

CAMERA MONITOR SYSTEM ANCILLARIES	
CS-020 - Two-way camera selector (Elite range connectors)	1571
VCS-020 - Two-way camera selector (Select range connectors)	1844



<ul style="list-style-type: none"><li>• Allows a 2nd camera to be connected to a monitor</li><li>• 2nd camera view selected by trigger wire</li><li>• Full screen view only</li><li>• 2 year warranty</li></ul>
---




# Mobile Digital Recording

Brigade's Mobile Digital Recording (MDR) systems are capable of capturing vehicle data and footage from up to 16 vehicle-mounted cameras.

The MDR range includes models with 4G connectivity capabilities, allowing data to be accessed from the recorder without having to physically go to the vehicle.

MDRs are compatible with all Brigade's Backeye® camera monitor systems, IP cameras and Backeye®360.

Dash Cams - compact, combined camera and recording systems that provide evidence in the case of vehicle incidents. The palm-sized devices are easily attached to the windscreen, enabling recording of the road ahead and in cab.



# Brigade





Model	Part No:	
MOBILE DIGITAL RECORDER 600 SERIES		
MDR-644-1-CMR	- 8 channel 1TB hard drive recorder	6570
MDR-644-2-SSD	- 8 channel 2TB solid-state drive recorder	6585
MDR-644G-1-CMR	- 8 channel 1TB hard drive recorder with 4G	6571
MDR-644G-2-SSD	- 8 channel 2TB solid-state drive recorder with 4G	6586
MDR-644GW-1-CMR	- 8 channel 1TB hard drive recorder with WiFi & 4G	6572
MDR-644GW-2-SSD	- 8 channel 2TB solid-state drive recorder with WiFi & 4G	6587



- 9-32Vdc
- 4 x Analogue & 4 x IP camera inputs
- Supports up to 12 cameras using external PON Switch
- Size 190 x 82 x 222mm (WxHxD)
- 8 trigger/alarm inputs
- Lockable and interchangeable storage unit
- Fast, easily downloadable recordings and data
- 3 year warranty

Contents

- 1 x MDR-644 Mobile Digital Recorder
- Wired Mouse
- Input / Output Cable
- Power Cable
- GPS Antenna
- 4G Network Antenna (G & GW models)
- Wi-Fi Antenna (GW models)
- USB A to B Cable
- Security Key
- Bracket & Fixings

Features

- Remotely access MDR units using wireless (WiFi models only) and/or Mobile network (4G models only)
- Mobile apps for remote view (WiFi/4G models only)
- Geo-fencing (4G models only)
- Mobile Standards: 3G/4G
- Audio (cameras must have microphones)
- Robust aluminum housing
- Anti-vibration mounting for reliable recording
- Built-in GPS
- Internal G-sensor and built-in buzzer
- Recordings saved to hard disk (protected by non-visible digital watermark) and in-built Mirror recording onto 64Gb SD card
- Recording modes: normal, alarm and timer (all watermarked)
- Configurable alarm trigger settings (speed, G-force, motion detection, video loss, voltage)
- Record images prior to alarm activation and after vehicle switched off
- MDR-Dashboard (full player) and MDR-Player (portable) with Google (English only)

- Search by date, time or triggered events
- Multi-level password protected access
- Hard drive unit directly pluggable to PC via USB port
- 8 x trigger Inputs, 2x trigger outputs and 1x12V power output
- Built-in HDD heater
- MDR Control using USB Mouse or optional IR remote control
- USB 3.0 connection
- TV System: PAL/NTSC/AHD
- Compatible with Brigade's vehicle CCTV camera monitor systems, IP cameras and Backeye@360 systems

Image and Audio Quality

- High quality H.265 image compression
- ADPCM - audio compression
- Choice of 8 low to high resolution settings
- Record at between 1 and 25 frames per second, per channel

Power

- Max power consumption: 80 Watts
- Current: 6.6 Amps

Durability & Standards

- Mechanical vibration: SSD 3.1G  
CMR 1.5G
- Mechanical shock: 51G
- Operating temperature: CMR -40 to +50°C  
SSD -40 to +70°C
- CE marked
- FCC approved
- E Mark
- IC approved

Model	Part No:	
MOBILE DIGITAL RECORDER 600 SERIES		
MDR-641-1-CMR	- 5 channel 1TB hard drive recorder	7068
MDR-641-2-SSD	- 5 channel 2TB solid-state drive recorder	7078
MDR-641G-1-CMR	- 5 channel 1TB hard drive recorder with 4G	7069
MDR-641G-2-SSD	- 5 channel 2TB solid-state drive recorder with 4G	7079
MDR-641GW-1-CMR	- 5 channel 1TB hard drive recorder with WiFi & 4G	7070
MDR-641GW-2-SSD	- 5 channel 2TB solid-state drive recorder with WiFi & 4G	7080



- 9-32Vdc
- 4 x Analogue & 1 x IP camera inputs
- 8 trigger/alarm inputs
- Lockable and interchangeable storage unit
- Fast, easily downloadable recordings and data
- Size (WxHxD) 190 x 70 x 206mm
- 3 year warranty

Main Contents

- 1 x MDR-641 Mobile Digital Recorder
- Wired Mouse
- Input / Output Cable
- Power Cable
- GPS Antenna
- 4G Antenna (G and GW models)
- Wi-Fi Antenna (GW models)
- CMS adapter cable
- Security Key
- Bracket and Fixings

Features

- Remotely access MDR units using wireless (WiFi models only) and/or Mobile network (4G models only)
- Mobile apps for remote view (WiFi/4G models only)
- Geo-fencing (WiFi/4G models only)
- Mobile Standards: 3G/4G
- Audio (cameras must have microphones)
- Robust housing
- GPS
- Internal G-sensor
- Recordings saved to hard disk or SSD (watermark protected)
- Recording modes: normal, alarm and timer (all watermarked)
- Configurable alarm trigger settings (speed, G-force, motion detection, video loss, voltage)
- Record images prior to alarm activation and after vehicle switched off
- MDR-Dashboard (full player) and MDR-Player (portable) with Google (English only)
- Search by date, time or triggered events

- Multi-level password protected access
- 8 x trigger Inputs, 2x trigger outputs and 1x power output
- Built-in HDD heater
- MDR Control using USB Mouse
- USB 3.0 connection
- TV System: PAL/NTSC/AHD
- Compatible with Brigade's vehicle CCTV camera monitor systems, IP cameras and Backeye@360 systems

Image and Audio Quality

- High quality H.265 image compression
- ADPCM - audio compression
- Choice of 8 low to high resolution settings
- Record at between 1 and 25 frames per second, per channel

Power

- Max power consumption: 22 Watts
- Current: 3.9 Amps

Durability & Standards

- Mechanical vibration: SSD 3.1G  
CMR 1.5G
- Mechanical shock: 51G
- Operating temperature: CMR -40 to +50°C  
SSD -40 to +70°C
- CE marked
- FCC approved
- E Mark
- IC approved

OPTIONAL EXTRA

Expand the channel capability of the MDR with the addition of an Expansion Module and IP cameras:



IP-EM4 - PON Expansion Module adds 4 channels to MDR-644 = 12 channels 5860

RECOMMENDED EXTRA

MDR-MCU-R-01	MDR Reader and cable for PC Required to download data from storage	7053
--------------	---	------

Model		Part No:
MOBILE DIGITAL RECORDER 500 SERIES		
MDR-508-1-G2-CMR	- 8 channel 1TB hard drive recorder	6244
MDR-508-2-G2-SSD	- 8 channel 2TB solid-state drive recorder	6437
MDR-508GW-1-G2-CMR	- 8 channel 1TB hard drive recorder with 4G	6246
MDR-508GW-2-G2-SSD	- 8 channel 2TB solid-state drive recorder with 4G	6439
MDR-508G-1-G2-CMR	- 8 channel 1TB hard drive recorder with WiFi & 4G	6245
MDR-508G-2-G2-SSD	- 8 channel 2TB solid-state drive recorder with WiFi & 4G	6438



- 9-32Vdc
- 8 camera inputs - Supports AHD High definition cameras
- 8 trigger/alarm inputs
- Lockable and interchangeable storage unit
- Fast, easily downloadable recordings and data
- Size (WxHxD) 224 x 85 x 221mm
- 3 year warranty

**Note:**  
G2 MDR-500 Series hard drives SSD and SD cards are NOT interchangeable with previous MDR-500 Series models unless a firmware and software update has been carried out. HDD SSD & SD cards also need formatting. See website for further details

- Main Contents**
- Mobile Digital Recorder with storage caddy unit
  - Wired Mouse
  - 64Gb industrial grade Class 10 SD card
  - Input / Output Cable
  - Power Cable
  - GPS Antenna
  - 4G Antenna (G and GW models)
  - Wi-Fi Antenna (W and GW models)
  - USB A to B Cable (3.0)
  - Security Key
  - Bracket and Fixings

- Features**
- Remotely access MDR units using wireless (WiFi models only) and/or Mobile network (4G models only)
  - Mobile apps for remote view (WiFi/4G models only)
  - Geo-fencing (WiFi/4G models only)
  - Mobile Standards: 2G/3G/4G
  - Audio (cameras must have microphones)
  - Robust aluminum housing
  - Anti-vibration mounting for reliable recording
  - Built-in GPS
  - Internal G-sensor and built-in buzzer
  - Recordings saved to hard disk or SSD (protected by non-visible digital watermark) and in-built Mirror recording onto 64Gb SD card
  - Recording modes: normal, alarm and timer (all watermarked)
  - Configurable alarm trigger settings (speed, G-force, motion detection, video loss, voltage)
  - Record images prior to alarm activation and after vehicle switched off
  - MDR-Dashboard (full player) and

- MDR-Player (portable) with Google and MS Bing maps (English only)
- Search by date, time or triggered events
- Multi-level GDPR compliant password protected access
- Storage unit directly pluggable to PC via USB port
- 8 x trigger Inputs, 2x trigger outputs and 1x12V power output
- Built-in HDD heater
- MDR Control using USB Mouse
- USB 3.0 connection
- TV System: PAL/NTSC/AHD
- Compatible with Brigade's vehicle CCTV camera monitor systems, IP cameras and Backeye@360 systems

- Image and Audio Quality**
- High quality H.264 image compression
  - ADPCM - audio compression
  - Choice of 8 low to high resolution settings
  - Record at between 1 and 25 frames per second, per channel

- Power**
- Max power consumption: 80 Watts
  - Current: 6.6 Amps

- Durability & Standards**
- Mechanical vibration: 1G
  - Mechanical shock: 51G
  - SSD vibration: 2.2G
  - Operating temperature: CMR -40 to +50°C SSD -40 to +70°C
  - E-Marked: UNECE R10 compliant
  - CE marked
  - FCC approved
  - IC approved
  - RoHS2 Compliant

OPTIONAL EXTRA

Expand the channel capability of the MDR with the addition of an Expansion Module and IP cameras:

IP-EM4 - Expansion Module adds 4 channels to MDR-508 = 12 channels	5860
IP-EM8 - Expansion Module adds 8 channels to MDR-508 = 16 channels	5861
IP-1XXX-PC - IP Camera - Power & Ethernet Cable	5985



Model	Part No:
-------	----------

What are IP cameras & Expansion Modules?

An Internet Protocol (IP) camera is a high-definition digital camera with its own IP address. Instead of transmitting video over a video cable to a monitor or MDR, the IP camera transmits digital video to the MDR over a data connection (ethernet cable) where the images are saved to the onboard storage.

See pages 16-17 for the range of IP cameras

Brigade Expansion Modules use Power Over Network (PON) Switch technology to expand the channel capability of the MDR by transmitting digital video images from up to 8 IP cameras over a single ethernet cable to the MDR. The MDR on-screen display allows easy camera set up without need for specific IP camera knowledge

<b>Benefit:</b> Connecting IP cameras increases the number of channels available on the MDR:		
MDR-641	- 4 x Analogue channels plus 1 x IP channel	= 5 channels
MDR-508	- 8 x Analogue channels plus 1 x IP channel	= 9 channels
MDR-644	- 4 x Analogue channels plus 4 x IP channels	= 8 channels
MDR-644 and 4 x PON switch	- 4 x Analogue channels plus 8 x IP channels	= 12 channels
MDR-508 and 4 x PON switch	- 8 x Analogue channels plus 4 x IP channels	= 12 channels
MDR-508 and 8 x PON switch	- 8 x Analogue channels plus 8 x IP channels	= 16 channels

Model	Part No:
-------	----------

IP EXPANSION MODULES

IP-EM4 - PON 4-channel switch	5860
IP-EM8 - PON 8-channel switch	5861



- 12-24Vdc
- 4 or 8 IP camera inputs
- Size (WxHxD)  
IP-EM4: 149 x 44 x 127mm  
IP-EM8: 174 x 54 x 129.5mm
- 3 year warranty

- Features**
- Expands the channel capability of the MDR by enabling the addition of IP cameras:  
IP-EM4 - adds 4 channels to MDR-508  
IP-EM8 - adds 8 channels to MDR-508  
IP-EM4 - adds 4 channels to MDR-644

- Power**
- Power consumption: 3 Watts

- Durability & Standards**
- Mechanical vibration: 2.3G
  - Mechanical shock: 150G
  - Operating temperature: -40 to +70°C
  - CE marked
  - E-Marked: UNECE R10 compliant
  - FCC approved
  - IC approved



IP EXPANSION MODULE ACCESSORIES



IP-EC-1 - CAT5E Ethernet cable 1 metre	5865
IP-EC-5 - CAT5E Ethernet cable 5 metre	5866


IP-EM-PC - MDR-PON Power cable	5864
--------------------------------	------





Model		Part No:
MOBILE DIGITAL RECORDER ACCESSORIES		
AC-305	- Splitter cable connects 1 x Backeye®360 BN360-200 camera to MDR & ECU	4903
AC-H305	- AHD splitter cable connects 1 x Backeye®360 BN360-1000C camera to MDR & ECU	6648
AC-306	- Connects 1 x Select camera to MDR and monitor	4904
AC-307	- Connects 1 x Elite camera to MDR and monitor	4905
AC-075	- Select Range Adapter cable female to female	7020
MDR-USB-A-01	- USB 3.0 cable Type A to Type A connectors <small>For MDR-641 models only</small>	7056
MDR-RP02	- Remote status & interface panel with panic button	6016
MDR-04RPC	- 6m cable for Remote status & interface panel	6018
MDR-AC-ACC-01	- Adapter cable for remote panel <small>For MDR-641 models only</small>	7051
MDR-MCU-R-01	- MCU reader for PC <small>For MDR-641 models only</small>	7053
		
MDR-508GW-EXP-0	- Wi-Fi & 4G upgrade Expansion Module <small>For MDR-508 models only. SD card not included</small>	5309
MDR-508G-EXP-0	- 4G upgrade Expansion Module <small>For MDR-508 models only. SD card not included</small>	5310
MDR-508W-EXP-0	- Wi-Fi upgrade Expansion Module <small>For MDR-508 models only. SD card not included</small>	5311
		
MDR-500-1-MCU-G2-CMR	- Caddy unit with 1TB CMR <small>For MDR-504 &amp; MDR-508 models only</small>	6243
MDR-500-0.5-MCU-G2-SSD	- Caddy unit with 500GB SSD <small>For MDR-504 &amp; MDR-508 models only</small>	6201
MDR-500-1-MCU-G2-SSD	- Caddy unit with 1TB SSD <small>For MDR-504 &amp; MDR-508 models only</small>	6202
MDR-500-2-MCU-G2-SSD	- Caddy unit with 2TG SSD <small>For MDR-504 &amp; MDR-508 models only</small>	6203
MDR-644-1-MCU-CMR	- Caddy unit with 1TB CMR <small>For MDR-644 models only</small>	6615
MDR-644-1-MCU-SSD	- Caddy unit with 1TB SSD <small>For MDR-644 models only</small>	6617
MDR-644-2-MCU-SSD	- Caddy unit with 2TB SSD <small>For MDR-644 models only</small>	6618
MDR-641-1-MCU-CMR	- Caddy unit with 1TB CMR <small>For MDR-641 models only</small>	7060
MDR-641-1-MCU-SSD	- Caddy unit with 1TB SSD <small>For MDR-641 models only</small>	7061
MDR-641-2-MCU-SSD	- Caddy unit with 2TB SSD <small>For MDR-641 models only</small>	7062
SD-32GB-IND	- 32GB industrial grade Class 10 SD card	4875
SD-64GB-IND	- 64GB industrial grade Class 10 SD card	4876

Model		Part No:
DASH CAM RECORDER		
DC-102-RVC -	Dash Cam and rear-view camera - UK	6395
DC-102-RVC-002 -	Dash Cam and rear-view camera - EU	7025
		
<ul style="list-style-type: none"><li>• 12-24Vdc</li><li>• In-built camera</li><li>• 1 external camera input</li><li>• Fast, easily downloadable recordings and data</li><li>• Dash Cam Size (WxHxD) 78 x 34.6 x 31.5mm</li><li>• Rear-view Camera size (WxHxD) 61 x 30.5 x 25mm</li><li>• 1 year warranty</li></ul>		
<p><b>Contents:</b></p> <ul style="list-style-type: none"><li>• 1x Dash Cam Recorder</li><li>• 1x Rear-view camera &amp; 6m camera cable</li><li>• 1x GPS Antenna</li><li>• 1x 3m Hardwire cable</li><li>• 1x Mounting Bracket, adhesive pads and clips</li><li>• 1 x 32Gb Micro SD card</li><li>• 1x Micro SD to SD adapter</li><li>• 1x Quick start guide</li></ul> <p><b>Features</b></p> <ul style="list-style-type: none"><li>• 1080p High definition video capture</li><li>• Wide-angle camera lens 140°</li><li>• Wide dynamic range for improved detail in shadow and highlights</li><li>• Up to 4 hours recording on supplied micro SD card (supports up to 64Gb)</li><li>• Continuous recording with automatic overwriting of oldest data</li><li>• Audio</li><li>• External GPS receiver</li><li>• FAT (File Allocation Table) system eliminates the need for manual formatting of video files</li></ul> <p><b>4 recording modes:</b></p> <ul style="list-style-type: none"><li>• Continuous - Records in 1min segments</li><li>• Incident - Records 10 seconds before and after an incident</li><li>• Manual - Records 10 seconds before and 50 seconds after manually starting recording</li><li>• Parking mode - Requires hard wiring</li></ul> <p><b>Infrared LEDs for ultra-low light performance (Infrared camera only)</b></p> <p><b>Adjustable camera angle (rear-view camera only)</b></p> <p><b>Picture Quality</b></p> <ul style="list-style-type: none"><li>• Sensor: 2.1 M Pixel 1/2.7" CMOS</li><li>• Dash Cam video resolution: FHD 1920 x 1080</li><li>• Rear-view camera video resolution: HD 1280x720</li><li>• MP4 image compression</li><li>• Fast frame rate, 30 frames per second</li></ul> <p><b>Durability &amp; Standards</b></p> <ul style="list-style-type: none"><li>• Operating temperature: -10 to +60°C</li><li>• CE marked</li></ul>		
DASH CAM RECORDER		
DC-102-IRC -	Dash Cam and internal Infrared LED camera - UK	6396
DC-102-IRC-002 -	Dash Cam and internal Infrared LED camera - EU	7028
		
<ul style="list-style-type: none"><li>• 12-24Vdc</li><li>• In-built camera</li><li>• 1 external camera input</li><li>• Fast, easily downloadable recordings and data</li><li>• Dash Cam Size (WxHxD) 78 x 34.6 x 31.5mm</li><li>• Infrared Camera size (WxHxD) 61 x 30.5 x 25mm</li><li>• 1 year warranty</li></ul>		
<p><b>Contents:</b></p> <ul style="list-style-type: none"><li>• 1x Dash Cam Recorder</li><li>• 1x Infrared LED Camera &amp; 0.6m camera cable</li><li>• 1x GPS Antenna</li><li>• 1x 3m Hardwire cable</li><li>• 1x Mounting Bracket, adhesive pads and clips</li><li>• 1 x 32Gb Micro SD card</li><li>• 1x Micro SD to SD adapter</li><li>• 1x Quick start guide</li></ul> <p><b>Features</b></p> <ul style="list-style-type: none"><li>• 1080p High definition video capture</li><li>• Wide-angle camera lens 140°</li><li>• Wide dynamic range for improved detail in shadow and highlights</li><li>• Up to 4 hours recording on supplied micro SD card (supports up to 64Gb)</li><li>• Continuous recording with automatic overwriting of oldest data</li><li>• Audio</li><li>• External GPS receiver</li><li>• FAT (File Allocation Table) system eliminates the need for manual formatting of video files</li></ul> <p><b>4 recording modes:</b></p> <ul style="list-style-type: none"><li>• Continuous - Records in 1min segments</li><li>• Incident - Records 10 seconds before and after an incident</li><li>• Manual - Records 10 seconds before and 50 seconds after manually starting recording</li><li>• Parking mode - Requires hard wiring</li></ul> <p><b>Infrared LEDs for ultra-low light performance (Infrared camera only)</b></p> <p><b>Adjustable camera angle (Infrared camera only)</b></p> <p><b>Picture Quality</b></p> <ul style="list-style-type: none"><li>• Sensor: 2.1 M Pixel 1/2.7" CMOS</li><li>• Dash Cam video resolution: FHD 1920 x 1080</li><li>• Infrared camera video resolution: HD 1280x720</li><li>• MP4 image compression</li><li>• Fast frame rate, 30 frames per second</li></ul> <p><b>Durability &amp; Standards</b></p> <ul style="list-style-type: none"><li>• Operating temperature: -10 to +60°C</li><li>• CE marked</li></ul>		

Model	Part No:
DASH CAM RECORDER	
DC-101 - Dash Cam - UK	6290
DC-101-001 - Dash Cam - EU	6558
<div><div><div></div><div><ul style="list-style-type: none"><li>• 12-24Vdc</li><li>• In-built camera</li><li>• 1 video output</li><li>• Fast, easily downloadable recordings and data</li><li>• Size (WxHxD) 78 x 34.6 x 31.5mm</li><li>• 1 year warranty</li></ul></div></div><div><div><b>Contents:</b><ul style="list-style-type: none"><li>• 1x Dash Cam Recorder</li><li>• 1x GPS Antenna</li><li>• 1x 3m Hardwire cable</li><li>• 1x Mounting Bracket, adhesive pads and clips</li><li>• 1x 16Gb Micro SD card</li><li>• 1x Micro SD to SD adapter</li><li>• 1x Quick start guide</li></ul></div><div><b>Features</b><ul style="list-style-type: none"><li>• 1080p High definition video capture</li><li>• Wide-angle camera lens 140°</li><li>• Wide dynamic range for improved detail in shadow and highlights</li><li>• Up to 4 hours recording on supplied micro SD card (supports up to 64Gb)</li><li>• Continuous recording with automatic overwriting of oldest data</li><li>• Audio</li><li>• External GPS receiver</li><li>• FAT (File Allocation Table) system eliminates the need for manual formatting of video files</li><li>• Front Vehicle departure warning</li></ul></div><div><b>Picture Quality</b><ul style="list-style-type: none"><li>• Sensor: 2.1 M Pixel 1/2.7" CMOS</li><li>• Video resolution: FHD 1920 x 1080</li><li>• MP4 image compression</li><li>• Fast frame rate, 30 frames per second</li></ul></div><div><b>Durability &amp; Standards</b><ul style="list-style-type: none"><li>• Operating temperature: -10 to +60°C</li><li>• CE marked</li></ul></div><div><b>4 recording modes:</b><ul style="list-style-type: none"><li>• Continuous - Records in 1min segments</li><li>• Incident - Records 10 seconds before and after an incident</li><li>• Manual - Records 10 seconds before and 50 seconds after manually starting recording</li><li>• Parking mode - Requires hard wiring</li></ul></div></div></div>	

Model	Part No:
DASH CAM ACCESSORIES	
DC-1XX-LOCK - Dashcam Locking Box	6296
DC-1XX-DPC7 - Power Cable (7m)	6323
DC-REAR-CAM - Additional 1080p rear camera <small>Included with DC-102-RVC</small>	6292
DC-IR-CAM - Additional 1080p Infrared camera <small>Included with DC-102-IRC</small>	6293
DC-1XX-32SD - 32GB Micro SD card with adapter	6541
DC-1XX-64SD - 64GB Micro SD card with adapter	6542



## AI Connected dashcam

The AI Connected Dashcam is a compact, windscreen-mounted dual camera system that uses AI technology to provide event warnings, high-definition incident recording and monitor driver behaviour.

The forward-facing camera will identify and audibly alert a driver to a hazardous situation, such as a risk of colliding with the vehicle ahead or an unsignalled lane departure.

The driver-facing camera will identify issues such as mobile use, smoking and inattention.

- 1920P forward facing and 1080P driver facing cameras for clearer identification of registrations, faces and incident detail
- Supports up to 1TB storage capacity (256GB supplied)
- Built-in 4G allows operators to monitor fleets on the move (Subscription required) via a Dashboard or mobile app, and to remotely live stream or download recorded footage
- Simple installation and calibration
- Enhanced G sensor detects harsh braking, cornering and acceleration events
- Event notifications sent to the dashboard or app to alert fleet managers to high risk incidents

Model	Part No:
AI CONNECTED DASHCAM	
DC-204-AI - Connected Dashcam with AI	7477
<div><div><div></div><div><ul style="list-style-type: none"><li>• 12-24Vdc</li><li>• In-built dual cameras: front and driver facing</li><li>• Built-in ADAS and driver safety alerts</li><li>• 4G Connection via Brigade's Telematics services</li><li>• Fast, easily downloadable recordings and data</li><li>• Supports 2 additional cameras - additional cable required</li><li>• Size (WxHxD) 113 x 88 x 68mm</li><li>• 1 year warranty</li></ul></div></div><div><div><b>Contents:</b><ul style="list-style-type: none"><li>• 1x Dash Cam Recorder</li><li>• 2x 128Gb Micro SD card</li><li>• 1x Power lead</li><li>• 1x Mounting Bracket</li><li>• 1x Power box with cable</li><li>• 1 x Torx driver</li></ul></div><div><b>Features</b><ul style="list-style-type: none"><li>• 170° driver facing camera lens</li><li>• 140° forward facing camera lens</li><li>• Wide dynamic range for improved detail in shadow and highlights</li><li>• Built-in WiFi and 4G communication module</li><li>• Built in ADAS function:<ul style="list-style-type: none"><li>- Lane Departure Warning (LDW)</li><li>- Forward Collision Warning (FCW)</li><li>- Headway Monitoring Warning (HMW)</li><li>- Digital Cockpit Safety (DCS) to detect unsafe driving behaviour</li></ul></li><li>• Built in 6-axis G-Sensor for harsh acceleration, deceleration, cornering and incident detection</li><li>• Built-in GPS receiver</li><li>• 3 recording modes:<ul style="list-style-type: none"><li>- Continuous: Records in 1min segments</li><li>- Timer: Records to schedule accurate to the second</li><li>- Alarm:<ul style="list-style-type: none"><li>- Pre-alarm from 1- to 60 minutes</li><li>- Post-alarm from 1-30 minutes</li></ul></li></ul></li><li>• Individual channel configurations for recording resolution, frame rate and quality</li><li>• Supports up to 1TB storage capacity</li></ul></div><div><b>Audio</b><ul style="list-style-type: none"><li>• Continuous recording with automatic overwriting of oldest data</li><li>• Supports CBVS monitors (additional cable required)</li></ul></div><div><b>Picture Quality</b><ul style="list-style-type: none"><li>• 5 M Pixel 1/2.7" CMOS sensor forward facing camera</li><li>• 2 M pixel 12.9 CMOS sensor Driver facing camera</li><li>• 1080p driver facing HD video capture</li><li>• 1920p forward facing HD video capture</li><li>• Fast frame rate, 30 frames per second</li></ul></div><div><b>Power</b><ul style="list-style-type: none"><li>• Power consumption: 12.66 Watts</li></ul></div><div><b>Durability &amp; Standards</b><ul style="list-style-type: none"><li>• Operating temperature: -40 to +70°C</li><li>• CE marked</li><li>• FCC approved</li><li>• IC approved</li><li>• E-marked: UNECE R10 compliant</li></ul></div><div><b>NOTES:</b><p>Available in the UK only.</p><p>In order to provide full functionality and maximum fleet manager benefit, the AI connected dashcam is only sold with a monthly subscription.</p><p>Contact us for further details.</p></div></div></div>	



# Object Detection Systems

Object detection systems detect stationary and moving objects, providing in-cab visual and audible warnings, alerting the operator or driver whose attention cannot be focused on all danger areas.



## **Backsense® heavy-duty radar sensor systems**

designed for heavy-duty machines to detect objects in blind spots. Available with fixed and programmable detection ranges.


**Ultrasonic detection sensors** To minimise both vehicle damage and collisions with pedestrians, cyclists or objects. Perfect for road-going commercial vehicles operating in confined spaces or manoeuvring at low speed. An optional external speaking alarm can be added to alert cyclists and pedestrians that the vehicle is turning.

**Detection systems with AI** are algorithm-based systems that predict if a collision is likely to occur and alert the driver depending on the severity of the calculation.

**ZoneSafe®** uses Radio Frequency Identification (RFID) technology to create detection zones around vehicles and mobile plant. Vehicle-mounted antennas detect RFID tags which can be worn by workers, placed on objects or property, or set up around restricted areas.

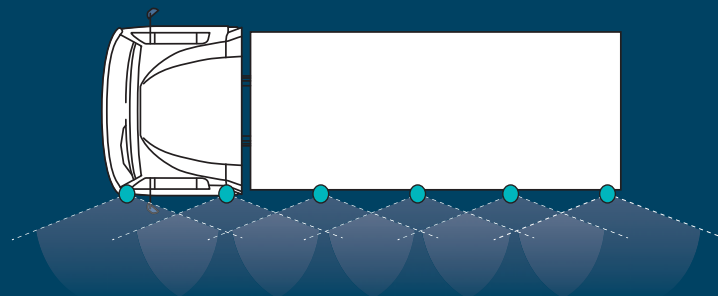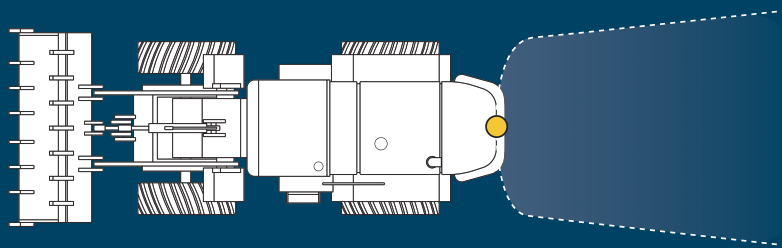

# Brigade

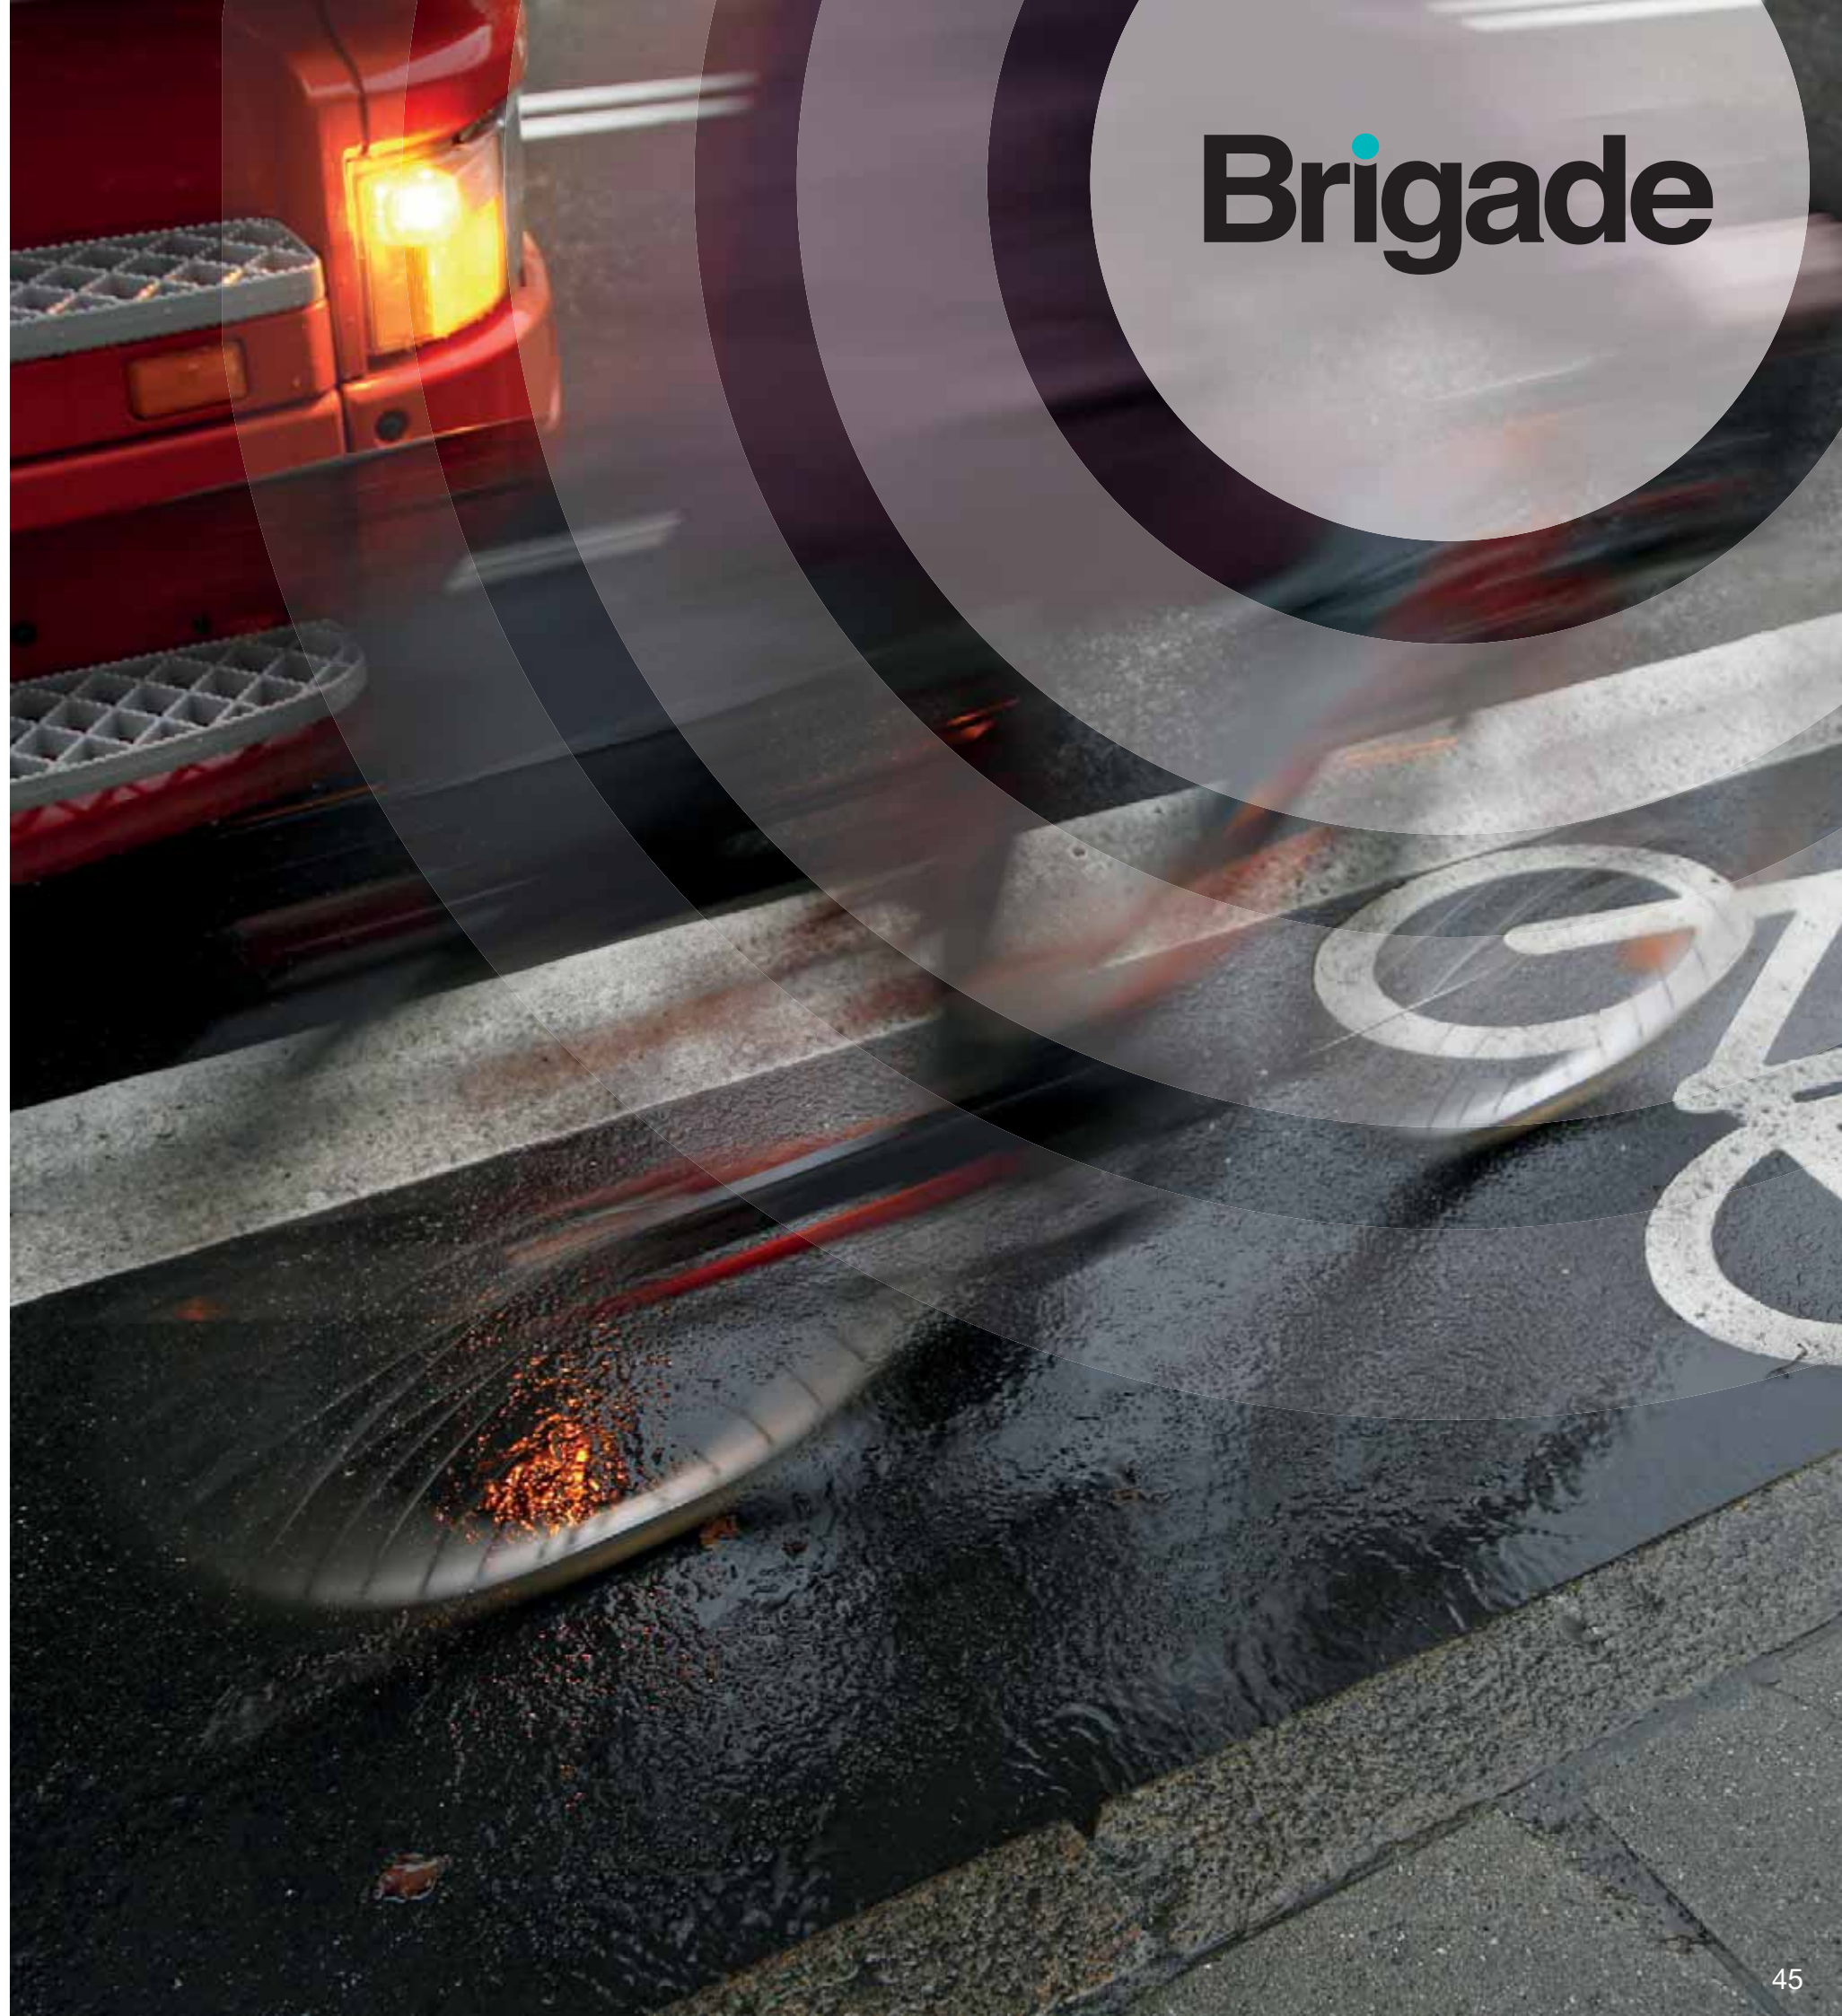




CAREYE® Turn Assist  
Artificial Intelligence blind spot detection

Developed by Eyyes  
EYES

CAREYE® is a new Artificial Intelligence (AI) blind-spot turn assistant for large commercial vehicles, comprising of a camera-based sensor mounted high on the side of the cab, an ECU and a driver display in the cab.

Vulnerable road users are detected and classified, and their future course of movement is calculated using artificial intelligence. Depending on the risk of collision, the driver will receive a visual and/or audible warning in real time. Only if a collision is predicted will an audible warning be given, thus minimising false warnings and the likelihood of the driver becoming habituated by the alarm.

- Alerts the driver using Artificial Intelligence
- Differentiates between vehicles and vulnerable road users (VRU)
- Calculates the direction of VRUs
- The driver receives a progressive alert according to the predicted risk of collision
- The system is active up to 30km/h with or without indicators being activated
- Effective in low light and poor weather conditions
- Detection area: 10m length and 4m width from side of vehicle
- Information signal according to UNECE R151 (Blind spot monitoring system)
- Developed and produced in the European Union

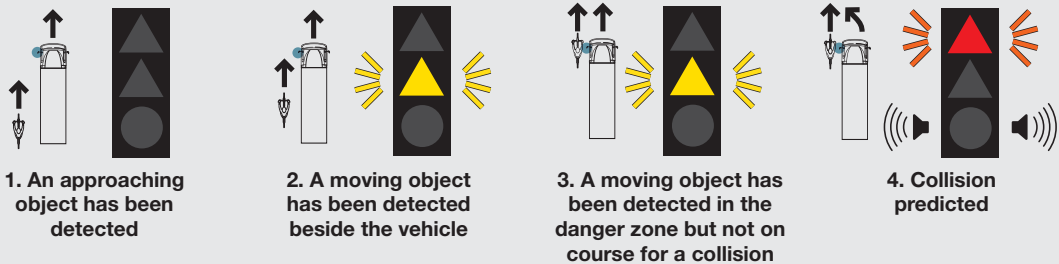

ModelPart No:

CAREYE® AI BLIND SPOT DETECTION SYSTEM

CAREYE® Turn assist with AI - Left side  
(for right-hand drive vehicles)CS-SET-00400

CAREYE® Turn assist with AI - Right side  
(for left hand-drive vehicles)CS-SET-00610



- Side camera sensor system
- 12-24Vdc
- Detection zone - 10m length and 4m width
- Dimensions: W x D x H  
Camera: 111 x 80 x 140mm  
ECU: 140 x 115 x 40mm
- IP66/67 Camera
- 2 year warranty

NOTE  
Must be fitted by a  
Brigade-trained  
installer.  
Contact us for details.

- Contents**
- 1 x HD camera sensor
  - in-cab audio/visual display
  - ECU
  - CAN inductive cable connector
- Features**
- Side camera system with Artificial Intelligence
  - Differentiates between vehicles and vulnerable road users (VRU)
  - Calculates the direction of VRU's
  - The driver receives a progressive alert according to the predicted risk of collision
  - The system is active up to 30km/h with or without indicators being activated
- Durability & Standards**
- Effective in low light and poor weather conditions
  - Information signal according to UNECE R151 (Blind spot monitoring system)
  - Heated camera
  - Speed signal from CAN connection
  - Developed and produced in the European Union
  - Operating temperature: -40° to +70°C
  - CE marked
  - E-Marked: UNECE R10 compliant
- Power**
- Power consumption: Max 100 Watts
  - Current: 25mA in idle mode


OPTIONAL EXTRAS

CarEYE Digital 7" 16:9 monitorCS-SET-00380  
CarEYE Turning Angle SensorCS-SET-00091  
CarEYE Wing extensionCS-SET-00530

Radar Predict  
Artificial Intelligence blind spot detection

Brigade's Radar Predict is the latest innovation in side-detection safety, specifically designed to protect cyclists from collisions with HGVs. The advanced radar system uses AI technology to detect a potential collision by analysing data such as speed and direction of both the vehicle and cyclist. By differentiating between static and moving objects, the Radar Predict algorithm alerts the driver only when an impact with a cyclist is likely.

The single dual-radar unit is fitted to the nearside of the truck and gives complete coverage to the side of the vehicle, including the trailer unit. The driver is alerted if a cyclist enters a detection zone and receives a second warning if a collision is predicted.

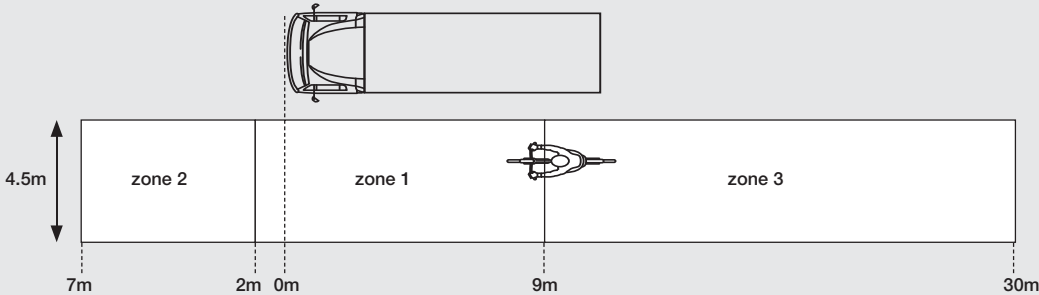

ModelPart No:

RADAR PREDICT AI SENSOR SYSTEM

RP-001 - 77GHz Radar Predict sensor system with AI - Left side  
(for right-hand drive vehicles)7500

RP-010 - 77GHz Radar Predict sensor system with AI - Right side  
(for left-hand drive vehicles)7625



- 9-32Vdc
- Detection length: 46m
- Detection width: 4.5m
- Sensor size (WxHxD)  
115 x 95 x 41mm
- Sensor size with bracket (WxHxD)  
200 x 110 x 43.5mm
- Display size with bracket (WxHxD) 131 x 63 x 42mm
- IP69K sensor
- 3 year warranty

- Contents**
- 1x dual radar sensor unit
  - 1 x Inertial measurement unit module
  - 1 x display
  - 1 x radar bracket
  - Radar cable
- Features**
- 180° cyclist side detection
  - Calculates if a collision is likely in the nearside blindspot
  - Covers nearside of a vehicle
  - 3 stage Visual alert when a cyclist is detected
  - Audible and visual alert when collision is predicted
  - Differentiates between cyclists and vehicles/other road users
  - Designed for rigid and articulated vehicles
  - System active under 30Km/h
- Power**
- Power consumption: 6.5 Watts
- Durability & Standards**
- Operating temperature: -40 to +85°C
  - CE marked
  - FCC approved
  - IC approved
  - E-Marked: UNECE R10 compliant
  - Complies with UNECE reg151 requirements
  - Meets 2024 Direct Vision Standard BSIS requirements
- Quick and easy installation**
- Compact and rugged design for harsh environments
  - Automatic trailer recognition
  - Operating frequency: 76-77GHz
  - Adjustable display volume




Sidescan®Predict  
Artificial Intelligence blind spot detection

Designed for rigid-bodied vehicles, the system comprises of six ultrasonic sensors fitted along the side of the vehicle to increase safety when turning or low speed manoeuvring. Each sensor has a maximum detection radius of 2.5 metres.

Sidescan®Predict constantly gathers object detection data such as the distance of an object, cyclist or other VRU from the vehicle, whether moving or stationary, plus additional information such as the speed, direction, acceleration, and turning rate. The data feeds an algorithm to calculate the risk of a collision, which is delivered to the driver as a visual warning, audible warning or both, depending on the severity of the calculation.

Examples of scenarios (not limited to)

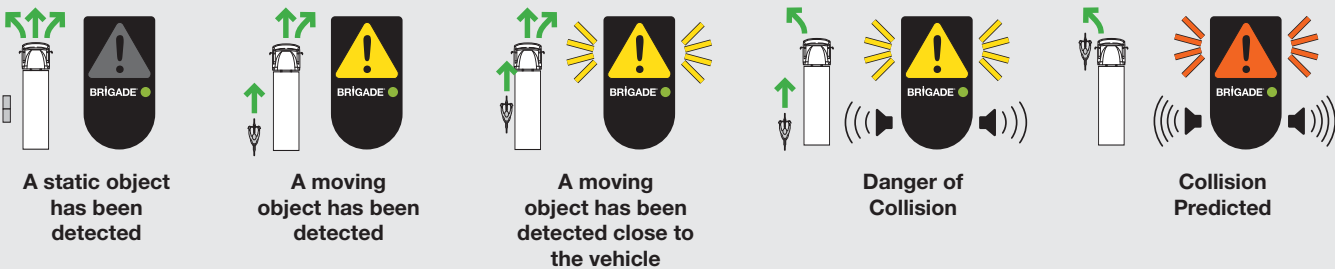

- Differentiates between static objects like road furniture and moving objects
- Calculates the direction and speed of VRUs
- The driver receives a progressive alert according to the predicted risk of collision
- The system is active up to 30km/h with or without indicators being activated
- Effective in low light and poor weather conditions
- Detection area: Up to 2.5m from side of vehicle
- For rigid vehicles only
- Independently tested - 2024 DVS/BSIS compliant

Model

Part No:

SIDESCAN®PREDICT AI DETECTION SYSTEM

SSP-6000W - Sidescan®Predict sensor system with AI

6153



- 6 sensor system
- 12-24Vdc
- Detection zones - 0 - 2.5m
- Underslung and flush-mount fixings included
- Display dimensions: 52 x 92 x 21mm (WxHxD)
- IP69K sensors
- 3 year warranty

NOTE  
Must be fitted by a  
Brigade-trained  
installer.  
Contact us for details.

Contents

- 6 x sensors
- Display
- Algorithm ECU
- 6 x 4 types flush mount fixings
- 6 x underslung fixings
- Waterproof control box
- 10m buzzer cable
- 4 x 4.5m sensor cables
- 2 x 2.5m extension cables

Features

- Detects objects in the nearside blindspot
- Differentiates between static objects and moving objects
- Calculates the risk of collision by evaluating speed, position and direction of the vehicle and detected VRU
- Driver audio and visual alerts
- Vehicle motion monitoring to remove unnecessary alarms
- Extra-wide sensor detection pattern for full side blind-spot coverage
- ECU configuration and diagnostics via USB
- Indicator-activated external turn alarms can be connected without additional hardware
- Built-in indicator and vehicle speed acquisition

- System automatically shuts off above 18.6 mph / 30 kph
- Auto brightness display. Manual alarm volume adjustment.
- Can be retrofitted by a trained installer.
- System can not be activated/deactivated by the driver.
- Environment Learning mode to eliminate false alarms from bodywork that intrudes in the first 100cm of the detection zone.
- Speed signal from Tachograph

Durability & Standards

- Mechanical vibration: 8.5G
- Mechanical shock: 51G
- Operating temperature: -30 to +70°C
- CE marked
- E-Marked: UNECE R10 compliant
- FCC approved
- IC approved

Power

- Power consumption: 3 Watts
- Current: 230mA


Sidescan®Flex

Flexible side detection

Sidescan®Flex is a four-sensor system fitted to the side of a vehicle to detect objects in the nearside blind spot, where cyclists or pedestrians can otherwise go undetected.

An advancement to the standard Sidescan® system, Sidescan®Flex allows the operator to choose from four detection configurations, each with different detection distances and audible and visual alerts (see table).

Sidescan® Flex has an increased maximum detection range of 2.5 metres.

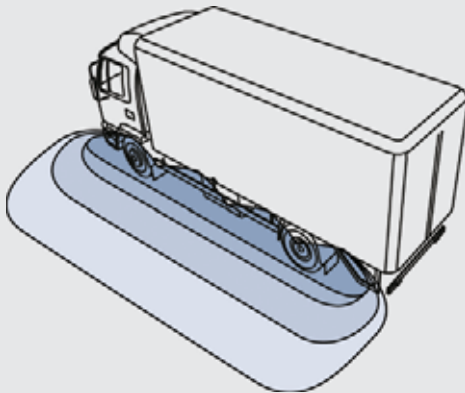

Detection distance		Config 1	Config 2	Config 3	Config 4
0 - 0.6m	Beeps per second	Constant	Constant	Constant	Constant
	Flashes per second	8	8	8	8
0.6 - 0.9m	Beeps per second	Constant	4	4	4
	Flashes per second	8	8	8	8
0.9 - 1.5m	Beeps per second	4	-	-	1
	Flashes per second	4	4	4	4
1.5 - 2.5m	Beeps per second	1	-	-	-
	Flashes per second	1	1	-	-

Model

Part No:

SIDESCAN®FLEX ULTRASONIC DETECTION SYSTEM

SS-4200W -

Sidescan®Flex sensor system with mute function

5916

SS-4200W-000 -

Sidescan®Flex sensor system with mute function,  
low speed trigger module and turn indicator sensor kit  
Includes LS-60-A low speed trigger module and TS-001ECU turn indicator sensor

6075



- 4 sensor system
- 12-24Vdc
- Detection zones - 0 - 2.5m (4 audible/visual configurations, selectable via dip switches)
- Underslung and flush-mount fixings included
- 1 Output trigger
- 3 year warranty

Contents

- 4 x sensors
- Buzzer
- 4 x 0° flush mount fixings
- 4 x 11° flush mount fixings
- 4 x underslung fixings
- Waterproof control box
- 10m buzzer cable
- 4 x 4.5m sensor cables
- 2 x 2.5m extension cables

Features

- Obstacles detected in under 200 milliseconds
- Buzzer with audible distance warning, LED & adjustable volume control
- Buzzer will silence after 4 seconds if there is no movement from detected object or vehicle
- Self-diagnostic function

- Environment Learning Mode prevents false alarms from ancillary equipment that intrudes in the first 100cm of the detection zone

Durability & Standards

- Mechanical vibration: 5G
- Mechanical shock: 10G
- Operating temperature: -30 to +80°C
- Waterproof sensors to IP68
- Waterproof control box to IP69K
- CE marked
- E-Marked: UNECE R10 compliant
- FCC approved

Power

- Power consumption: 2.4 Watts
- Current: 200mA

OPTIONAL EXTRA

UDS-RELAY-24

Trigger-out diode protected relay 24Vdc

4215

UDS-RELAY-12

Trigger-out diode protected relay 12Vdc

4216

To power a device switched by the output trigger



Model	Part No:
SIDESCAN® ULTRASONIC DETECTION SYSTEM	
SS-4100W - Sidescan® Side sensor system with mute function	5257
SS-4100W-000 - Sidescan® Side sensor system with mute function, low speed trigger module and turn indicator sensor kit	5344
Includes LS-60-A low speed trigger module and TS-001ECU turn indicator sensor	



<ul style="list-style-type: none"><li>• 4 sensor system</li><li>• 12-24Vdc</li><li>• 1.0/1.5m detection range - (selectable via dip switch)</li><li>• Audible distance warning</li><li>• Underslung and flush-mount fixings included</li><li>• 2 levels of sensitivity - (selectable via dip switch)</li><li>• 3 year warranty</li></ul>	<b>Contents</b> <ul style="list-style-type: none"><li>• 4 x sensors</li><li>• Buzzer</li><li>• 4 x 0° flush mount fixings</li><li>• 4 x 11° flush mount fixings</li><li>• 4 x underslung fixings</li><li>• Waterproof control box</li><li>• 10m buzzer cable</li><li>• 4 x 4.5m sensor cables</li><li>• 2 x 2.5m extension cables</li></ul> <b>Features</b> <ul style="list-style-type: none"><li>• Obstacles detected in under 200 milliseconds</li><li>• Buzzer with audible distance warning, LED &amp; adjustable volume control</li><li>• Buzzer will silence after 4 seconds if there is no movement from detected object or vehicle</li><li>• Environment Learning Mode prevents false alarms from ancillary equipment that intrudes in the first 100cm of the detection zone</li><li>• Self-diagnostic function</li></ul> <b>Durability &amp; Standards</b> <ul style="list-style-type: none"><li>• Mechanical vibration: 5G</li><li>• Mechanical shock: 10G</li><li>• Operating temperature: -30 to +80°C</li><li>• Waterproof sensors to IP68</li><li>• Waterproof control box to IP69K</li><li>• CE marked</li><li>• E-Marked: UNECE R10 compliant</li><li>• FCC approved</li></ul> <b>Power</b> <ul style="list-style-type: none"><li>• Power consumption: 2.4 Watts</li><li>• Current: 200mA</li></ul>
--	---



SIDESCAN®/SIDESCAN®FLEX ADDITIONS FOR ARTICULATED VEHICLES		
SK-15-04	Truck/trailer camera/sensor cable kit	3997
SK-UDS-05	Truck/trailer sensor only cable kit (required)	4219
UDS-10BC	10m display cable (required)	3716
SS-4100W	Additional Sidescan sensor system for cab (optional)	5257



SIDESCAN®/SIDESCAN®FLEX RECOMMENDED EXTRAS		
LS-60-A	Low speed trigger module Enables sensors below designated speed	4851
TS-001ECU	Turn indicator trigger for system activation	1362
SIDESCAN®/SIDESCAN®FLEX OPTIONAL EXTRA		
SS-BC-08	Backchat speaking alarm with side turn warning for cyclists/pedestrians Note: TS-001ECU Turn indicator trigger is required	1334
TCO-47-01	Latched auto-reset Backalarm cut-out (dash mount)	4752

Model	Part No:
BACKSCAN® ULTRASONIC DETECTION SYSTEM	
BS-4000W - Backscan® Rear reversing sensor system	3744



<ul style="list-style-type: none"><li>• 4 sensor system</li><li>• 12-24Vdc</li><li>• 2.5m detection range - outer sensors 2.5m/0.6m (selectable via dip switch)</li><li>• Graduated visual and audible distance warning display</li><li>• Underslung and flush-mount fixings included</li><li>• 50cm compensation range for sensors fitted inboard of vehicle rear (selectable via dip switch)</li><li>• 3 year warranty</li></ul>	<b>Contents</b> <ul style="list-style-type: none"><li>• 4 x sensors</li><li>• Visual and audible display</li><li>• 4 x 0° flush mount fixings</li><li>• 4 x 11° flush mount fixings</li><li>• 4 x underslung fixings</li><li>• Waterproof control box</li><li>• 15m display cable</li><li>• 4 x 2.5m sensor cables</li></ul> <b>Features</b> <ul style="list-style-type: none"><li>• Obstacles detected in under 200 milliseconds</li><li>• Environment Learning Mode prevents false alarms from tow-hooks and other ancillary equipment that intrudes in the first 100cm of the detection zone</li><li>• Self-diagnostic function</li><li>• 1 x Trigger output</li></ul> <b>Durability &amp; Standards</b> <ul style="list-style-type: none"><li>• Mechanical vibration: 5G</li><li>• Mechanical shock: 10G</li><li>• Operating temperature: -30 to +80°C</li><li>• Waterproof sensors to IP68</li><li>• Waterproof control box to IP69K</li><li>• CE marked</li><li>• E-Marked: UNECE R10 compliant</li><li>• FCC approved</li></ul> <b>Power</b> <ul style="list-style-type: none"><li>• Power consumption: 2.4 Watts</li><li>• Current: 200mA</li></ul>
--	---



ADDITIONS FOR ARTICULATED VEHICLES		
SK-15-04	Truck/trailer camera/sensor cable kit	3997
SK-UDS-05	Truck/trailer sensor only cable kit	4219
UDS-10BC	10m Buzzer/display cable	3716
OPTIONAL EXTRA		
UDS-RELAY-24	Trigger-out diode protected relay 24Vdc	4215
UDS-RELAY-12	Trigger-out diode protected relay 12Vdc To power a device switched by the output trigger	4216



Model	Part No:
FRONTSCAN® ULTRASONIC DETECTION SYSTEM	
FS-4000W - Frontscan® Front sensor system	3747



<ul style="list-style-type: none"><li>• 4 sensor system</li><li>• 12-24Vdc</li><li>• 2.0m/1.0m detection range - outer sensors can be reduced to 0.6m (selectable via dip switches)</li><li>• Audible distance warning</li><li>• Flush-mount</li><li>• 3 year warranty</li></ul>	<b>Contents</b> <ul style="list-style-type: none"><li>• 4 x sensors</li><li>• Buzzer</li><li>• 4 x 11° flush mount fixings</li><li>• 4 x 18° flush mount fixings</li><li>• 4 x 26° flush mount fixings</li><li>• Waterproof control box</li><li>• 2.5m buzzer cable</li><li>• 4 x 2.5m sensor cables</li></ul> <b>Features</b> <ul style="list-style-type: none"><li>• Obstacles detected in under 200 milliseconds</li><li>• Environment Learning Mode prevents false alarms from tow-hooks and other ancillary equipment that intrudes in the first 100cm of</li></ul>	<ul style="list-style-type: none"><li>the detection zone</li><li>• Self-diagnostic function</li><li>• 1 x Trigger output</li></ul> <b>Durability &amp; Standards</b> <ul style="list-style-type: none"><li>• Operating temperature: -30 to +80°C</li><li>• Waterproof sensors to IP68</li><li>• Waterproof control box to IP69K</li><li>• CE marked</li><li>• E-Marked: UNECE R10 compliant</li></ul> <b>Power</b> <ul style="list-style-type: none"><li>• Power consumption: 2.4 Watts</li><li>• Current: 200mA</li></ul>
--	--	--

RECOMMENDED EXTRA



LS-60-A	Low speed trigger module Enables sensors below designated speed	4851
---------	--	------

OPTIONAL EXTRA



UDS-RELAY-24	Trigger-out diode protected relay 24Vdc	4215
UDS-RELAY-12	Trigger-out diode protected relay 12Vdc To power a device switched by the output trigger	4216

CORNERSCAN® ULTRASONIC DETECTION SYSTEM

CS-3100 - Cornerscan® Corner sensor system with mute function	5261
---	------



<ul style="list-style-type: none"><li>• 3 sensor system</li><li>• 12-24Vdc</li><li>• 0.6/1.0m detection range - (selectable via dip switch)</li><li>• Audible distance warning</li><li>• Flush-mount</li><li>• 2 levels of sensitivity - (selectable via dip switch)</li><li>• 3 year warranty</li></ul>	<b>Contents</b> <ul style="list-style-type: none"><li>• 3 x sensors</li><li>• Buzzer</li><li>• 3 x 11° flush mount fixings</li><li>• 3 x 18° flush mount fixings</li><li>• 3 x 26° flush mount fixings</li><li>• Waterproof control box</li><li>• 2.5m buzzer cable</li><li>• 3 x 2.5m sensor cables</li></ul> <b>Features</b> <ul style="list-style-type: none"><li>• Obstacles detected in under 200 milliseconds</li><li>• Buzzer with audible distance warning, LED &amp; adjustable volume control</li><li>• Buzzer will silence after 4 seconds if there is no movement from detected object or vehicle</li><li>• Environment Learning Mode prevents false alarms</li></ul>	<ul style="list-style-type: none"><li>from ancillary equipment within the first 100cm of the detection zone</li><li>• Self-diagnostic function</li></ul> <b>Durability &amp; Standards</b> <ul style="list-style-type: none"><li>• Mechanical vibration: 5G</li><li>• Mechanical shock: 10G</li><li>• Operating temperature: -30 to +80°C</li><li>• Waterproof sensors to IP68</li><li>• Waterproof control box to IP69K</li><li>• CE marked</li><li>• E-Marked: UNECE R10 compliant</li><li>• FCC approved</li></ul> <b>Power</b> <ul style="list-style-type: none"><li>• Power consumption: 2.4 Watts</li><li>• Current: 2 Amps</li></ul>
--	---	---

RECOMMENDED EXTRA



LS-60-A	Low speed trigger module Enables sensors below designated speed	4851
---------	--	------

Model	Part No:
STEPSCAN™ ULTRASONIC DETECTION SYSTEM	
ST-2100 - Stepscan™ Step sensor system with mute function	5262
ST-2100-60-A - Stepscan™ Step sensor system with mute function and low speed trigger module Includes UDS-4.5SC 4.5m extension cable	5345



<ul style="list-style-type: none"><li>• 2 sensor system</li><li>• 12-24Vdc</li><li>• 0.6/1.0m detection range - (selectable via dip switch)</li><li>• Audible distance warning</li><li>• Flush-mount</li><li>• 2 levels of sensitivity - (selectable via dip switch)</li><li>• 3 year warranty</li></ul>	<b>Contents</b> <ul style="list-style-type: none"><li>• 2 x sensors</li><li>• Buzzer</li><li>• 2 x 11° flush mount fixings</li><li>• 2 x 18° flush mount fixings</li><li>• 2 x 26° flush mount fixings</li><li>• Waterproof control box</li><li>• 2.5m buzzer cable</li><li>• 2 x 2.5m sensor cables</li></ul> <b>Features</b> <ul style="list-style-type: none"><li>• Obstacles detected in under 200 milliseconds</li><li>• Buzzer with audible distance warning, LED &amp; adjustable volume control</li><li>• Buzzer will silence after 4 seconds if there is no movement from detected object or vehicle</li><li>• Environment Learning Mode prevents false alarms from</li></ul>	<ul style="list-style-type: none"><li>ancillary equipment that intrudes in the first 100cm of the detection zone</li><li>• Self-diagnostic function</li></ul> <b>Durability &amp; Standards</b> <ul style="list-style-type: none"><li>• Mechanical vibration: 5G</li><li>• Mechanical shock: 10G</li><li>• Operating temperature: -30 to +80°C</li><li>• Waterproof sensors to IP68</li><li>• Waterproof control box to IP69K</li><li>• CE marked</li><li>• E-Marked: UNECE R10 compliant</li><li>• FCC approved</li></ul> <b>Power</b> <ul style="list-style-type: none"><li>• Power consumption: 2.4 Watts</li><li>• Current: 200mA</li></ul>
--	--	---

RECOMMENDED EXTRA



LS-60-A	Low speed trigger module Enables sensors below designated speed	4851
---------	--	------

EXTENSION CABLES



UDS-2.5BC - Buzzer/display extension cable 2.5m	3717
UDS-10BC - Buzzer/display extension cable 10m	3716
UDS-15BC - Buzzer/display extension cable 15m	3746
UDS-2.5SC - Sensor extension cable 2.5m	3719
UDS-4.5SC - Sensor extension cable 4.5m	3720
UDS-7.0SC - Sensor extension cable 7.0m	5623

Ultrasonic Detection On-Screen Display Module




- Integration of Brigade’s ultrasonic obstacle detection systems and Backeye® camera monitor systems
- Ultrasonic detection warnings overlaid onto camera image on in-cab monitor
- Reduced driver stress and distractions as all information is in one view

Sensor data and camera image combined

Brigade’s ultrasonic proximity sensors minimise both vehicle damage and collisions with pedestrians, cyclists or objects. Perfect for road-going commercial vehicles operating in confined spaces or manoeuvring at low speed.

Working in conjunction with a Backeye® camera monitor system and up to two ultrasonic detection systems, the on-screen display module warns the driver of obstacles close to the vehicle by overlaying 3-stage audible and visual ultrasonic data onto the camera image on the monitor.

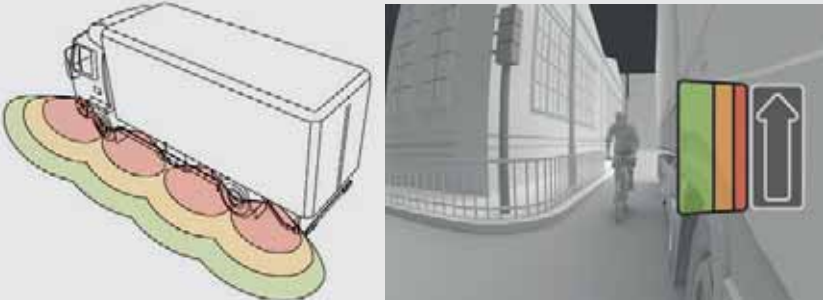

Model

Part No:

ULTRASONIC ON-SCREEN DISPLAY MODULE

UDS-OSD20-ECU - On-screen display module PAL	5099
UDS-OSD21-ECU - On-screen display module NTSC	5347




- Allows 3-stage audible and visual Ultrasonic data to be overlaid onto camera image on vehicle monitor
- 12-24Vdc
- 2 camera inputs
- 2 trigger inputs
- 2 UDS inputs
- 2 UDS outputs
- 2 year warranty

- Contents**
- OSD ECU
  - Power cable
  - Splitter cable
  - Trigger cable
- Features**
- Overlay on monitor of vehicle icon and detection data from up to 2 x ultrasonic detection systems
  - Compatible with 1x Sidescan® Frontscan® and Backscan®
  - UDS overlay will appear on a black background if no cameras installed
  - Graphics can be overlaid left or right on the monitor
  - Audible warning via monitor
  - Ultrasonic system fault displayed on monitor
  - Compatible with MDR
- Durability & Standards**
- Mechanical vibration: 5G
  - Mechanical shock: 10G
  - Operating temperature: -30 to +70°C
  - IP30
  - Dimensions: 74 x 118 x 28mm (WxDxH)
  - CE marked
  - E-Marked: UNECE R10 compliant
  - FCC Approved
  - IC Approved
- Power**
- Power consumption: 1.7 Watts
  - Current: 140mA
- Note: Not compatible with HD camera monitor systems**

Front Radar

Specifically designed to meet 2024 DVS/GSR R159 requirements, the Front Radar is an advanced dual-radar collision prediction system with a 180° detection angle to the front of the vehicle. The driver is alerted through visual and audible signals if a vulnerable road user is detected in close proximity.

- Meets GSR R159 and 2024 PSS Direct Vision Standard MOIS requirements
- Enhanced dual radar technology to detect pedestrians and cyclists in the front blind spot
- 3-stage system to alert drivers through visual and audible signals if a vulnerable road user is detected in close proximity to the front of the vehicle when stationary as well as moving off
- Real-time Feedback: Providing real-time warnings to the drivers for immediate reaction to prevent collisions
- Plug and Play System: Only requires power from the vehicle

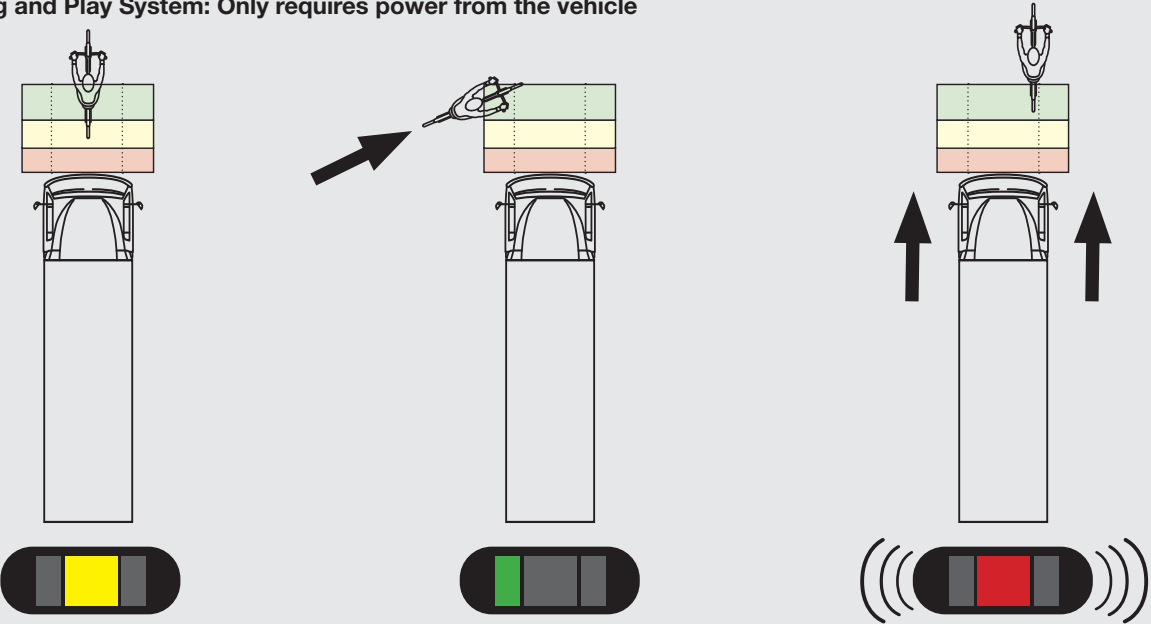

Model

Part No:

FRONT RADAR SENSOR SYSTEM

FR-001DVS - DVS Front Radar sensor system	7673
For front centre installation	
FR-30LDVS - DVS Offset Front Radar sensor system	8000
For front 30cm-offset left-of-centre installation	
FR-001R159 -R159 Front Radar sensor system	8064
For front centre installation	



- 9-32Vdc
- Detection length:  
DVS Front Radar: 2.5m  
R159 Front Radar: 4.2m
- Detection width: 3.6m
- Sensor size (WxHxD)  
115 x 95 x 41mm
- Sensor size with bracket (WxHxD)  
200 x 110 x 43.5mm
- Display size (WxHxD)  
80 x 40 x 20mm
- IP69K sensor
- 3 year warranty

- Contents**
- 1 x dual radar sensor unit
  - 1 x display & bracket
  - 1 x radar bracket
  - 1 x radar cable 5m
  - 1 x IMU module & bracket

- Features**
- 180° detection angle
  - Detects VRUs in the front blind spot when vehicle is stationary or moving off
  - Detects static and moving objects
  - 3-stage visual driver alert dependent on detection distance from vehicle
  - Audible and visual driver alert when object is detected and vehicle is moving forward
  - Designed for rigid and articulated vehicles
  - System active under 5Km/h
  - Quick and easy installation

- Compact and rugged design for harsh environments
  - Operating frequency: 76-77GHz
  - Adjustable display volume
  - Self-adjusting brightness display
- Power**
- Power consumption: 6.5 Watts
- Durability & Standards**
- Operating temperature: -40 to +85°C
  - CE marked
  - E-Marked: UNECE R10 compliant
  - DVS Front Radar Meets 2024 PSS Direct Vision Standard MOIS requirements
  - R159 Front Radar conforms to GSR R159 requirements



Model	Part No:
PROGRAMMABLE BACKSENSE® OBJECT DETECTION SYSTEM	
BS-8100 - 77GHz Programmable detection range	7135
<div><ul style="list-style-type: none"><li>• 9-32Vdc</li><li>• Detection length: up to 60m (minimum programmable distance 0-3m)</li><li>• Detection width: 2 to 16m</li><li>• Rugged design for harsh environmental conditions</li><li>• Sensor size (WxHxD) 160 x 100 x 40mm</li><li>• Display size with bracket 101 x 71 x 70mm (WxHxD)</li><li>• IP69K sensor</li><li>• 3 year warranty</li></ul></div>	<div><p><b>Contents</b></p><ul style="list-style-type: none"><li>• 1 x Configurable radar sensor</li><li>• 1 x Audible and visual display with USB socket and mounting bracket</li><li>• 1 x 9m extension cable</li><li>• 1 x Mini USB cable</li></ul><p><b>Features</b></p><ul style="list-style-type: none"><li>• Frequency modulated continuous wave (FMCW) radar technology</li><li>• Quick reaction time</li><li>• Effectively detects stationary, moving and multiple objects such as vehicles or property</li><li>• 1 activation input</li><li>• 1 trigger output</li><li>• Programmable:<ul style="list-style-type: none"><li>• Detection area</li><li>• Blind zones - system ignores fixed objects</li><li>• Buzzer (70 to 90 dB(A) at 1m)</li></ul></li></ul><p><b>Power</b></p><ul style="list-style-type: none"><li>• Current: 0.8 Amps</li><li>• Power consumption: 8 Watts</li></ul><p><b>Durability &amp; Standards</b></p><ul style="list-style-type: none"><li>• Operating temperature: -40 to +85°C</li><li>• CE marked</li><li>• UKCA marked</li><li>• FCC approved</li><li>• IC approved</li><li>• E-Marked: UNECE R10 compliant</li></ul><p><b>Note: Configuration software available at <a href="http://brigade-electronics.com">brigade-electronics.com</a></b></p></div>



SELECTABLE BACKSENSE® OBJECT DETECTION SYSTEMS	
BS-7100 - 77GHz Selectable detection range	7248
<div><ul style="list-style-type: none"><li>• 9-32Vdc</li><li>• 3 x selectable preset detection ranges: (LxW) 3m x 2.5m 4.5m x 3.5m 6m x 4.5m</li><li>• Rugged design for harsh environmental conditions</li><li>• Sensor size (WxHxD) 160 x 100 x 40mm</li><li>• Display size with bracket 101 x 71 x 70mm (WxHxD)</li><li>• IP69K sensor</li><li>• 3 year warranty</li></ul></div>	<div><p><b>Contents</b></p><ul style="list-style-type: none"><li>• 1 x Non-configurable radar sensor</li><li>• 1 x Audible and visual display with mounting bracket</li><li>• 1 x 9m extension cable</li></ul><p><b>Features</b></p><ul style="list-style-type: none"><li>• Frequency modulated continuous wave (FMCW) radar technology</li><li>• Quick reaction time</li><li>• Effectively detects stationary, moving and multiple objects such as vehicles or property</li><li>• 1 activation input</li><li>• 1 trigger output</li><li>• 5 stage adjustable audible and visual distance warning display</li><li>• Adjustable buzzer volume: (70-90dBA)</li><li>• Sensor resistant to water, moisture, dust, vibration, heat, cold, mud and glare</li></ul><p><b>Power</b></p><ul style="list-style-type: none"><li>• Current: 0.8 Amps</li><li>• Power consumption: 8 Watts</li></ul><p><b>Durability &amp; Standards</b></p><ul style="list-style-type: none"><li>• Mechanical shock: 100G</li><li>• Mechanical vibration: 8.3G</li><li>• Operating temperature: -40 to +85°C</li><li>• CE marked</li><li>• UKCA marked</li><li>• FCC approved</li><li>• IC approved</li><li>• E-Marked: UNECE R10 compliant</li></ul></div>



Backsense® CAN Radar

For OEM and specialist application markets, Brigade's Network Radar allows you to connect and link up to 8 sensors to cover large, sometimes complex blind spot zones around a vehicle or machine.

The system provides object detection in CAN (Controller Area Network) message format which may be processed to display data on control panels/displays on the vehicle or used to interact with aspects of the machine.

Each connected radar sensor is allocated a unique ID and will transmit data for up to 8 closest objects. With a detection range of up to 60m length and 16m width, it provides a flexible system to meet customer specific requirements.

- Provides object detection in CAN message format
- Independent CAN Bus may communicate with existing CAN network via CAN Gateway
- Separate CAN message & ID for each object detected (up to 8 per sensor)

Model	Part No:
NETWORK BACKSENSE® OBJECT DETECTION	
BS-9100 - Backsense® 77GHz CAN object detection radar	6351
<div><ul style="list-style-type: none"><li>• 12-24 Vdc</li><li>• Detection length: up to 60m</li><li>• Detection width: 2m to 16m</li><li>• Sensor size (WxHxD) 160 x 100 x 40mm</li><li>• IP69K sensor</li><li>• 3 year warranty</li></ul></div>	<div><p><b>Contents</b></p><ul style="list-style-type: none"><li>• 1 x BS-9100 Radar sensor</li></ul><p><b>Features</b></p><ul style="list-style-type: none"><li>• Frequency modulated continuous wave (FMCW) radar technology</li><li>• Quick reaction time</li><li>• Network up to 8 sensors</li><li>• Extremely rugged design for severe weather conditions and all terrains</li><li>• Communication via CAN Gateway</li><li>• Configurable CAN ID</li><li>• Complies with CAN2.0A Base Frame Format</li><li>• Separate CAN message &amp; ID for each object detected (up to 8 closest objects per sensor)</li></ul><p><b>Power</b></p><ul style="list-style-type: none"><li>• Current: 0.8 Amps</li><li>• Power consumption: 8 Watts</li></ul><p><b>Durability &amp; Standards</b></p><ul style="list-style-type: none"><li>• Mechanical shock: 100G</li><li>• Operating temperature: -40 to +85°C</li><li>• CE marked</li><li>• UKCA marked</li><li>• E-Marked: UNECE R10 compliant</li></ul><p><b>Note: For CAN message format, refer to user manual at <a href="http://brigade-electronics.com">brigade-electronics.com</a></b></p></div>



BACKSENSE® RADAR OBJECT DETECTION ACCESSORIES		
BS-02DCX	- 2m extension cable	5272
BS-05DCX	- 5m extension cable	4550
BS-09DCX	- 9m extension cable	4551
BS-25DCSX	- 25m extension cable (Female end connector supplied loose)	4975
BS-00NYC	- Network Y Cable for 9000 series radar	5270
BS-02PIC	- Network power input cable for 9000 series radar	5271
BS-00NT	- 120 Ohms Network Terminator for 9000 series radar	5291
CT-470	- Constant tone external alarm - 102dB	1346
BS-WD-USB	- USB -programming software, port driver and operating guide	5637
BKT-023	- Adjustable Bracket for BS-9100, BS-8100 & BS-7100	7190

ZoneSafe Control Unit

The ZoneSafe Control Unit is installed in the cab so it is clearly visible to the driver. ZoneSafe is activated when a VibraTag Driver Tag is inserted into the Control Unit prior to operating the vehicle. Audible and visual alerts indicate various alarm states including a two-stage alert for the detection of one or more tags, system errors and the non-insertion of a driver tag. A mute button can override a detection alert once a tag has been acknowledged.

ZoneSafe Antenna

A ZoneSafe Antenna creates a detection zone around a vehicle. Up to six antennas can be installed and linked in sequence to a control unit. The detection zone for each antenna can be programmed from smallest 3m up to largest 10m.

Zonesafe® RFID Tags

ZoneSafe RFID tags can be used to detect people, protect assets and to create exclusion zones. Each tag can be uniquely identified and linked to individual people. Driver tags have the same functionality as pedestrian tags and are also compatible with the control unit.

ModelPart No:

ZONESAFE® RFID TAG DETECTION SYSTEM

ZS-1000-ECU - ZoneSafe® Control Unit5881

- 12-24Vdc
- Size (WxHxD)  
102 x 180 x 58mm
- IP65
- WIFI configuration interface for remote monitoring and downloads
- 2 Year Warranty

Features

- Installed in the cab of vehicle
- Two stage audible and visual warnings to the machine operator when a tag or tags are detected by connected antennas (available separately)
- Connect up to 6 antennas
- Internal memory to store up to 4,000 events
- System activation by inserting driver tag
- Alarm if driver tag is left in vehicle
- Central mute button to acknowledge the detection of one or more tags (configurable)

- Multi-colour status panel
- 3 selectable detection levels
- AMPS hole pattern mounting
- 1 x Trigger input
- 1 x Trigger output
- TX Frequency: 125kHz
- RX Frequency: 868.3MHz

Power

- Current: 0.5 Amps

Durability & Standards

- Operating temperature: -40 to +85C
- CE marked

OPTIONAL EXTRA

ZS-ECU-MP Mounting Plate for Control Unit5900



ModelPart No:

ZONESAFE® RFID TAG DETECTION SYSTEM

ZS-1000-AP - ZoneSafe Vehicle-to-Pedestrian Antenna5882

- 12-24Vdc
- Detection radius range: 0 - 10m (Configurable between 3 & 10m)
- Size (WxHxD)  
122 x 250 x 90mm
- IP67
- 2 Year Warranty

Features

- Creates a detection zone around a vehicle
- Detects tags through walls and obstructions and around blind corners
- Detection zone radius programmable manually or via WIFI
- Connects to Control Unit on vehicle (antenna cable available separately)
- Daisy-chain wiring to connect multiple antennas to the same vehicle
- TX Frequency: 125kHz
- RX Frequency: 868.3MHz

Power

- Current: 1 Amp

Durability & Standards

- Operating temperature: -40 to +85C
- CE marked

Note: Antenna cable required for installation

OPTIONAL EXTRA

ZS-C130 Antenna Cable, 30m5899

ZS-AP-MP Mounting Plate for Pedestrian Antenna5898

ZS-1000-BKT Adjustable-Angle Mounting Bracket6079

ZONESAFE® RFID TAG DETECTION SYSTEM

ZS-1000-PVT - ZoneSafe® Pedestrian VibraTag, rechargeable5889

ZS-1000-DVT - ZoneSafe® Driver VibraTag, rechargeable5888

ZS-1000-TC - ZoneSafe® Pedestrian VibraTag, rechargeable, with clip5892

- Size (WxHxD)  
84 x 53 x12mm
- IP67
- 1 Year Warranty

Features

- Carried by workers and machine operators
- Each tag can be uniquely identified and linked to individual people
- Driver tags have the same detection functionality as pedestrian tags and are also compatible with the control unit
- Driver tag is masked from detection when inserted into the control unit
- Tag immediately vibrates upon entering a vehicle detection perimeter
- High-capacity rechargeable battery

- 2 hour inductive charging time using wireless charger (available separately)
- Hermetically sealed to provide best long term protection
- Can be worn on a lanyard, into pockets or armbands
- RX Frequency: 125kHz
- TX Frequency: 868.3MHz

Durability & Standards

- Operating temperature: -10 to +55C
- CE marked

OPTIONAL EXTRA

ZS-1000-TWC ZoneSafe® Wireless VibraTag charger5893





ModelPart No:

ZONESAFE® RFID TAG DETECTION SYSTEM

ZS-1000-AT - ZoneSafe® AssetTag5894



- Size (HxDia)  
63 x 48mm
  - IP67
  - 1 Year Warranty
- Features**

  - High-capacity (non-rechargeable) replaceable power cell providing long operational life (included)
  - Protects vehicle from collisions with property or hazards
  - Immediately warns the driver when tag is detected within the vehicle's detection zone
  - Robust and waterproof enclosure
- Can be attached onto assets or mounted on top of a safety cone with neck opening diameter of 39-44mm
  - RX Frequency: 125kHz
  - TX Frequency: 868.3MHz

**Durability & Standards**

  - Operating temperature: -10 to +55C
  - CE marked

ZONESAFE® RFID TAG DETECTION SYSTEM

ZS-1000-TT - ZoneSafe® Tag Tester5883



- 24 Vdc  
(external 24V DC supplied)
  - Size (WxHxD)  
110 x 90 x 55mm
  - IP67
  - 1 Year Warranty
- Features**

  - Checks pedestrian and driver tag battery status (green for good and red for low)
  - Includes 2 relays which can be used to trigger alarms, locks or shutters
  - Adjustable Tag detection range from 0.1 to 4m
  - TX Frequency: 125kHz
  - RX Frequency: 868.3MHz
- Power**

  - Current: 0.5 Amp

**Durability & Standards**

  - Operating temperature: -10 to +55C
  - CE marked

ZONESAFE® RFID TAG DETECTION SYSTEM

ZS-1000-MZ - ZoneSafe® Masking Zone Antenna5885



- 24 Vdc  
(external 24V DC supplied)
  - Size (WxHxD)  
250 x 122 x 90mm
  - IP67
  - 1 Year Warranty
- Features**

  - Fitted to walls or other permanent structures
  - Makes all tags within the masked area undetectable
  - Adjustable masking zone from 3 to 10m
  - Tags will be detected as normal once outside the masked area
  - TX Frequency: 125kHz
- Power**

  - Current: 1 Amp

**Durability & Standards**

  - Operating temperature: -40 to +85C
  - CE marked

OPTIONAL EXTRA



ZS-AP-MP Mounting Plate for Pedestrian Antenna5898

ZS-1000-BKT Adjustable-Angle Mounting Bracket6079

ModelPart No:

ZONESAFE® RFID TAG DETECTION SYSTEM

ZS-1000-SG - ZoneSafe® Smart Gateway5886



- 24 Vdc  
(external 24V DC supplied)
  - Size (WxHxD)  
110 x 90x 55mm
  - IP67
  - 1 Year Warranty
- Features**

  - Fitted to walls or other permanent structures
  - 2 x relays which can be used to trigger alarms or open shutters, barriers etc
  - Detects approaching vehicles equipped with ZoneSafe systems
  - Adjustable detection range from 3 to 9m
  - RX Frequency: 125kHz
  - TX Frequency: 868.3MHz
- Power**

  - Current: 0.5 Amp

**Durability & Standards**

  - Operating temperature: -10 to +55C
  - CE marked

ZONESAFE® RFID TAG DETECTION SYSTEM

ZS-1000-DR - ZoneSafe® Desktop Reader5887



- Size (HxDia)  
160 x80 x 45mm
  - 5V USB connection
  - 1 Year Warranty
- Features**

  - Checks VibraTag battery status (green for good and red for low)
  - Can be powered from any computer via USB
  - TX Frequency: 125kHz
  - RX Frequency: 868.3MHz
- Durability & Standards**

  - Operating temperature: -10 to +55C


# Warning Alarms

**Vital safety devices needed to warn workers and pedestrians that a vehicle is manoeuvring.**

**bbs-tek® white sound®** are the safest alarms in the world due to their instant locatability and directional sound. The multi-frequency alarms are only heard in the danger zone, thus eliminating noise nuisance for local residents. bbs-tek® white sound® Smart alarms auto-adjust to 5dB above ambient.

**Quiet Vehicle Sounder** Designed for electric and hybrid-electric vehicles of all types, the Front speaker QVS Electric Vehicle Sounder warns pedestrians and other vulnerable road users that a quiet vehicle is approaching.

**Single Tone Alarms** meet the basic needs of reversing safety by warning pedestrians and workers that a vehicle is reversing.

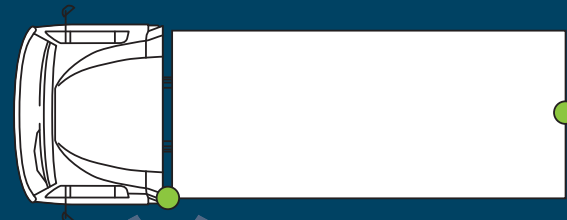

# Brigade





ModelPart No:

WHITE SOUND® SMART REVERSING ALARM

SA-BBS-107 - Self-adjusting heavy-duty - 87-107 Decibels1400



- 12-24Vdc
  - IP68
  - Size (WxHxD)  
172 x 79 x 95mm
  - Lifetime warranty
- Features**

  - Alarm continually adjusts to 5-10dB above ambient
  - Multi-frequency broadband sound
  - Instantly locatable
  - Sound confined to danger area
  - Eliminates noise nuisance
  - Sounder unit: Driver
  - Hole centres (mm): 153
- Power**

  - Current: Max 1 Amp

**Durability & standards**

  - Mechanical vibration: 10G
  - Operating temperature: -40 to +85°C
  - CE marked
  - E-Marked: UNECE R10 compliant
  - UKCA marked
  - SAE J994

WHITE SOUND® SMART REVERSING ALARM

SA-BBS-97 - Self adjusting - medium duty - 77-97 Decibels1399  
SA-BBS-97HV - Self adjusting - electric forklift - 77-97 Decibels1398



- 12-24Vdc
  - 36-80Vdc (HV)
  - IP68
  - Size (WxHxD)  
127 x 76 x 65mm
  - Lifetime warranty
- Features**

  - Alarm continually adjusts to 5-10dB above ambient
  - Multi-frequency white sound alarm
  - Instantly locatable
  - Sound confined to danger area
  - Eliminates noise nuisance
  - Sounder unit: Driver
  - Hole centres (mm): 98-108
- Power**

  - Current: Max 1 Amp

**Durability & standards**

  - Mechanical vibration: 10G
  - Operating temperature: -40 to +85°C
  - CE marked
  - E-Marked: UNECE R10 compliant
  - UKCA marked
  - SAE J994
  - NAS/PIEK approved for night-time delivery

WHITE SOUND® REVERSING ALARM

BBS-107 - Heavy duty - 107 Decibels0899  
BBS-102 - Heavy duty - 102 Decibels0898



- 12-24Vdc
  - IP68
  - Size (WxHxD)  
172 x 79 x 95mm
  - Lifetime warranty
- Features**

  - Multi-frequency broadband sound
  - Instantly locatable
  - Sound confined to danger area
  - Eliminates noise nuisance
  - Sounder unit: Driver
  - Hole centres (mm): 153
- Power**

  - Current: Max 1 Amps

**Durability & standards**

  - Mechanical vibration: 10G
  - Operating temperature: -40 to +85°C
  - CE marked
  - E-Marked: UNECE R10 compliant
  - UKCA marked
  - SAE J994

WHITE SOUND® REVERSING ALARM

BBS-82HV - Electric forklift - 82 Decibels1322  
BBS-92ADR - Petrol tanker - 92 Decibels2165



- 12-24Vdc
  - 36-80Vdc (HV)
  - IP68
  - Size (WxHxD)  
127 x 76 x 65mm
  - Lifetime warranty
- Features**

  - Multi-frequency broadband sound
  - Instantly locatable
  - Sound confined to danger area
  - Eliminates noise nuisance
  - Sounder unit: Speaker
  - Hole centres (mm): 98-108
- Power**

  - Current: Max 0.3 Amps

**Durability & standards**

  - Mechanical vibration: 10G
  - Operating temperature: -40 to +85°C
  - CE marked
  - E-Marked: UNECE R10 compliant
  - UKCA marked
  - SAE J994

ModelPart No:

WHITE SOUND® REVERSING ALARM

BBS-97 - Medium duty - 97 Decibels0935  
BBS-92 - Medium duty - 92 Decibels0934  
BBS-87 - Medium duty - 87 Decibels0897  
BBS-82 - Medium duty - 82 Decibels0896



- 12-24Vdc
  - IP68
  - Size (WxHxD)  
105x65x37mm (BBS-97/92)  
105x65x32mm (BBS-87/82/77)
  - Lifetime warranty
- Features**

  - Multi-frequency broadband sound
  - Instantly locatable
  - Sound confined to danger area
  - Eliminates noise nuisance
  - Sounder unit: Speaker
  - Hole centres (mm): 76
- Power**

  - Current: Max 0.5 Amps

**Durability & standards**

  - Mechanical vibration: 10G
  - Operating temperature: -40 to +85°C
  - CE marked
  - E-Marked: UNECE R10 compliant
  - UKCA marked
  - SAE J994
  - NAS/PIEK approved for night-time delivery (BBS-82 only)

SIDE TURN WARNING ALARM

BBS-TI - Turn Indicator Warning Alarm - 90 Decibels6235



- 12-24Vdc
  - IP68
  - Size (WxHxD)  
122 x 84 x 50mm
  - 2 year warranty
- Features**

  - Multi-frequency broadband sound
  - Activates on side turn indication
  - Sound synchronises with vehicle indicator flash
  - Built-in turn indicator trigger
  - Built-in timed and latched alarm cut out functions
  - Sounder unit: Speaker
  - Hole centres (mm): 102
- Power**

  - Current: 0.5 Amps

**Durability & standards**

  - CE marked
  - E-Marked: UNECE R10 compliant
  - UKCA marked

QVS QUIET VEHICLE SOUNDER (AVAS)

QVS-001-75 - Quiet Vehicle Sounder5385



- 12-24Vdc
  - IP68 Speaker
  - IP30 ECU
  - Size Speaker (WxHxD)  
120 x 135 x 120mm
  - Size ECU (WxHxD)  
93 x 26 x 185mm
  - 2 year warranty
- Contents**

  - 1 x Speaker
  - 1 x ECU

**Features**

  - Warns pedestrians and other VRU's that a quiet vehicle is approaching
  - Combined multi-frequency bbs-tek® technology and tonal sounds
  - Multi-frequency sound
  - Directional and locatable - The sound is only heard in the hazard zone.
  - Front speaker system
  - Pitch and volume increase with vehicle speed to mimic an internal combustion engine
  - Operational below speeds of 20MPH
  - Front sounder operational when ignition activated (silenced when parking brake applied)
  - Uses Tachograph speed signal\*\*
  - Sounder unit: Speaker
- Power**

  - Current: Max 0.1 Amps

**Durability & standards**

  - Mechanical vibration: 10G
  - Operating temperature: -30 to +70°C
  - CE marked
  - E-Marked: UNECE R10 compliant
  - UKCA marked
  - FCC approved
  - IC Marked
  - UNECE R138 compliant\*
  - 49 CFR Part 571 and 585 Federal Motor Vehicle Safety Standards compliant\*

\* QVS helps achieve compliance for the vehicle.

\*\* If your vehicle is not equipped with a Tachograph, please contact us for alternative installation methods

ModelPart No:

NIGHTSHIFT® SPEAKING ALARM



BC-01(NS) - Single reversing message - Nightshift - 90 or 0 Decibels0378  
BC-01(NS-B) - Bespoke single message - Nightshift - 90 or 0 Decibels1198

- 12-24Vdc
  - IP68
  - Size (WxHxD)  
122 x 84 x 50mm
  - 2 year warranty
- Features**

  - Real speech alarm
  - \* BC-01(NS) message "Ssh! Stand well clear, vehicle reversing..."
  - Bespoke message up to 8 seconds, under 4 seconds for best speech quality
  - Double engage reverse to cut-out or reduce sound
  - Sounder unit: Speaker
  - Hole centres (mm): 102
- Power**

  - Current: 0.5 Amps

**Durability & standards**

  - CE marked
  - E-Marked: UNECE R10 compliant
  - UKCA marked

SPEAKING ALARM



BC-01 - Single reversing message - 90 Decibels0077  
BC-01(B) - Bespoke single message - 90 Decibels0079  
BC-02(B) - Bespoke dual message - 90 Decibels0083

- 12-24Vdc
  - IP68
  - Size (WxHxD)  
122 x 84 x 50mm
  - 2 year warranty
- Features**

  - Real speech alarm
  - \* BC-01 message "Ssh! Stand well clear, vehicle reversing..."
  - Bespoke message up to 8 seconds, under 4 seconds for best speech quality
  - Sounder unit: Speaker
  - Hole centres (mm): 102
- Power**

  - Current: 0.5 Amps

**Durability & standards**

  - CE marked
  - E-Marked: UNECE R10 compliant
  - UKCA marked

SPEAKING HANDBRAKE WARNING ALARM



2 wire version

BC-01(H/Brake) - Single message - 2 wire - 90 Decibels0849  
BC-01(4W)(H/Brake) - Single message 4 wire - 90 Decibels1715

- 12-24Vdc
  - IP68
  - Size (WxHxD)  
122 x 84 x 50mm
  - 2 year warranty
- Features**

  - Real speech alarm
  - \* Message "Bleep! Handbrake not applied..."
  - Sounder unit: Speaker
  - Hole centres (mm): 102
- Power**

  - Current: 0.5 Amps

**Durability & standards**

  - CE marked
  - E-Marked: UNECE R10 compliant
  - UKCA marked

SPEAKING SIDE TURN WARNING ALARM



SS-BC-08 - Single side-turn message - 90 Decibels1334

- 12-24Vdc
  - IP68
  - Size (WxHxD)  
122 x 84 x 50mm
  - 2 year warranty
- Features**

  - Real speech alarm
  - \* Message "Ssh! Caution. Truck turning left..."
  - Sounder unit: Speaker
  - Hole centres (mm): 102

**Power**

  - Current: 0.5 Amps
- Durability & standards**

  - CE marked
  - E-Marked: UNECE R10 compliant
  - UKCA marked

Note: TS-001ECU Turn indicator trigger is required1362

ModelPart No:

SMART TONAL REVERSING ALARM



SA-800 - Self adjusting heavy duty - 87-112 Decibels1315

- 12-24 Volts
  - IP68
  - Size (WxHxD)  
156 x 85 x 108mm
  - 2 year warranty
- Features**

  - Alarm continually adjusts to 5-10dB above ambient
  - Frequency (KHz): 1.9
  - Sounder unit: Dome speaker
  - Hole centres (mm): 111-114

**Power**

  - Current: Max 0.3 Amps
- Durability & standards**

  - Mechanical vibration: 10G
  - Operating temperature: -40 to +85°C
  - CE marked
  - EMC approved: e
  - SAE J994

SMART TONAL REVERSING ALARM



SA-400 - Self adjusting medium duty - 82-102 Decibels1310

- 12-24 Volts
  - IP68
  - Size (WxHxD)  
100 x 72 x 32mm
  - 2 year warranty
- Features**

  - Alarm continually adjusts to 5-10dB above ambient
  - Frequency (KHz): 1.4
  - Sounder unit: Speaker
  - Hole centres (mm): 76-82

**Power**

  - Current: Max 0.2 Amps
- Durability & standards**

  - Mechanical vibration: 10G
  - Operating temperature: -40 to +85°C
  - CE marked
  - EMC approved: e
  - SAE J994

TONAL REVERSING ALARM



BA-890 - Heavy duty - 112 Decibels1246

- 12-24 Volts
  - IP68
  - Size (WxHxD)  
156 x 85 x 108mm
  - 2 year warranty
- Features**

  - Frequency (KHz): 1.9
  - Sounder unit: Dome speaker
  - Hole centres (mm): 111-114

**Power**

  - Current: Max 0.5 Amps
- Durability & standards**

  - Mechanical vibration: 10G
  - Operating temperature: -40 to +85°C
  - CE marked
  - EMC approved: e
  - SAE J994



Model	Part No:
TONAL REVERSING ALARM	
BA-570 - Medium duty - 102 Decibels	2885
BA-560 - Medium duty - 97 Decibels	2742



<ul style="list-style-type: none"><li>• 12-24Vdc</li><li>• IP68</li><li>• Size (WxHxD) 105 x 62 x 32mm</li><li>• 2 year warranty</li></ul>	<b>Features</b> <ul style="list-style-type: none"><li>• 2 metre cable (BA-530TCA-2)</li><li>• Frequency (KHz): 1.6</li><li>• Sounder unit: Speaker</li><li>• Hole centres (mm): 75-85</li></ul> <b>Power</b> <ul style="list-style-type: none"><li>• Current: Max 0.3 Amps</li></ul>	<b>Durability &amp; standards</b> <ul style="list-style-type: none"><li>• Mechanical vibration: 10G</li><li>• Operating temperature: -40 to +85°C</li><li>• CE marked</li><li>• EMC approved: e</li><li>• SAE J994</li></ul>
--	--	--

NIGHT SILENT TONAL REVERSING ALARM	
BA-57 - Light duty - 90 Decibels	0027



<ul style="list-style-type: none"><li>• 12-24Vdc</li><li>• IP66</li><li>• Size (WxHxD) 48 x 60 x 48mm</li><li>• 2 year warranty</li></ul>	<b>Features</b> <ul style="list-style-type: none"><li>• Blue wire connection mutes alarm when vehicle lights are on</li><li>• Frequency (KHz): 2.4</li><li>• Sounder unit: Piezo</li><li>• Single bolt fitting</li></ul>	<b>Power</b> <ul style="list-style-type: none"><li>• Current: Max 0.03 Amps</li></ul> <b>Durability &amp; standards</b> <ul style="list-style-type: none"><li>• Mechanical vibration: 10G</li><li>• Operating temperature: -20 to +60°C</li><li>• CE marked</li></ul>
---	--	---

TONAL REVERSING ALARM	
BA-13 - Medium duty - 90 Decibels	0015



<ul style="list-style-type: none"><li>• 12-24Vdc</li><li>• IP68</li><li>• Size (WxHxD) 66 x 74 x 96mm</li><li>• 2 year warranty</li></ul>	<b>Features</b> <ul style="list-style-type: none"><li>• Frequency (KHz): 1.3</li><li>• Sounder unit: Speaker</li><li>• Single bolt fitting</li></ul> <b>Power</b> <ul style="list-style-type: none"><li>• Current: Max 0.3 Amps</li></ul>	<b>Durability &amp; standards</b> <ul style="list-style-type: none"><li>• Mechanical vibration: 10G</li><li>• Operating temperature: -40 to +85°C</li><li>• CE marked</li></ul>
---	---	---

Model	Part No:
VEHICLE INTERCOM	
BC-VI - Normally open channel rear to cab; button press cab to rear	0815
BC-VI-2 - Normally closed channel; button press communication	0875



<ul style="list-style-type: none"><li>• 12-24Vdc</li><li>• IP68</li><li>• Size (WxHxD) 122 x 84 x 50mm</li><li>• 2 year warranty</li></ul>	<b>Features</b> <ul style="list-style-type: none"><li>• Two-way communication system</li><li>• Master unit volume control: 80-95dB</li><li>• Includes master unit, slave unit and 25m cable</li><li>• Sounder unit: Speaker</li><li>• Hole centres (mm): 102</li></ul>	<b>Power</b> <ul style="list-style-type: none"><li>• Current: 0.5 Amps</li></ul> <b>Durability &amp; standards</b> <ul style="list-style-type: none"><li>• CE marked</li><li>• E-Marked: UNECE R10 compliant</li><li>• UKCA marked</li><li>• FCC Approved</li><li>• IC Approved</li></ul>
--	--	---

ALARM ANCILLARIES	
TCO-47 - Timed auto-reset reversing alarm cut-out (dash mount)	0663



<ul style="list-style-type: none"><li>• 12-24Vdc</li><li>• 2 year warranty</li></ul>	<b>Features</b> <ul style="list-style-type: none"><li>• Single touch timed relay</li><li>• Allows driver to cut-out alarm if reversing between the hours of 11.30pm-7.00am</li><li>• Auto-resets after 3-4 mins delay</li></ul>	<b>Durability and Standards</b> <ul style="list-style-type: none"><li>• CE marked</li><li>• EMC approved</li></ul>
--	---	--

ALARM ANCILLARIES	
TCO-47-01 - Latched side-turn alarm cut-out (dash mount)	4752



<ul style="list-style-type: none"><li>• 12-24Vdc</li><li>• 2 year warranty</li></ul>	<b>Features</b> <ul style="list-style-type: none"><li>• Single touch timed relay</li><li>• Allows driver to cut-out alarm between the hours of 11.30pm-7.00am</li><li>• Resets by switch or ignition</li></ul>	<b>Durability and Standards</b> <ul style="list-style-type: none"><li>• CE marked</li><li>• EMC approved</li></ul>
--	--	--

ALARM ANCILLARIES	
NS-2 - Nightshift reversing alarm cut-out switch	0334
NS-3 - Nightshift reversing alarm cut-out switch (auto gearbox)	0974



<ul style="list-style-type: none"><li>• 12-24Vdc</li><li>• IP68</li><li>• 2 year warranty</li></ul>	<b>Features</b> <ul style="list-style-type: none"><li>• Double engage reverse to cut-out alarm</li><li>• Resets when reverse gear disengaged</li><li>• No wiring necessary to cab</li></ul>	<b>Durability and Standards</b> <ul style="list-style-type: none"><li>• CE marked</li><li>• EMC approved</li></ul>
---	---	--

Part	Model	Page	Part	Model	Page	Part	Model	Page	Part	Model	Page	Part	Model	Page	Part	Model	Page
0015	BA-13	68	2165	BBS-92ADR	64	4851	LS-60-A	33	5623	UDS-7.0SC	53	6203	MDR-500-2-MCU-G2-SSD	40	7369	BE-H005	26
0027	BA-57	68	2199	VBV-485C	15	4875	SD-32GB-IND	40	5637	BS-WD-USB	57	6243	MDR-500-1-MCU-G2-CMR	40	7370	BE-H008	26
0077	BC-01	66	2538	VSK-30E	31	4876	SD-64GB-IND	40	5688	MD-60(SW)	14	6244	MDR-508-1-G2-CMR	38	7371	BE-H010	26
0079	BC-01(B)	66	2539	VSK-31E	31	4903	AC-305	40	5690	MD-61(SW)	14	6245	MDR-508G-1-G2-CMR	38	7372	BE-H012	26
0083	BC-02(B)	66	2540	VSK-50E	30	4904	AC-306	24	5696	MD-60(W)	14	6246	MDR-508GW-1-G2-CMR	38	7373	BE-H015	26
0334	NS-2	69	2541	VSK-50E-A	30	4905	AC-307	24	5698	MD-61(W)	14	6290	DC-101	42	7374	BE-H020	26
0378	BC-01(NS)	66	2542	VSK-30E-T	30	4924	BE-850C	11	5719	DMC-1031	15	6292	DC-REAR-CAM	42	7375	BE-H025	26
0663	TCO-47	69	2543	VSK-31E-T	31	4925	AC-063	24	5721	DMC-1035	15	6293	DC-IR-CAM	42	7376	BE-H030	26
0800	BE-L130	26	2589	AC-019	25	4926	AC-24-12(009)	24	5737	MD-60	14	6296	DC-1XX-LOCK	42	7396	VBV-2230C AI-D04	10
0801	BE-L120	26	2590	AC-020	24	4948	AC-064	25	5738	MD-61	14	6317	BBS-TI	65	7477	DC-204-AI	43
0802	BE-L115	26	2705	BE-870LM	19	4949	AC-308	24	5760	AC-24-12(011)	26	6323	DC-1XX-DPC7	42	7489	VBV-AI801	26
0803	BE-L110	26	2742	BA-560	68	4975	BS-25DCSX	57	5800	BN360-300	7	6351	BS-9100	57	7490	VBV-AI805	26
0804	BE-L105	26	2797	BE-L1003	26	5003	MD-50SM-30	14	5809	BN360-H320	8	6380	BE-870HM	19	7491	VBV-AI820	26
0805	BE-X003	26	2808	VBV-710C	13	5004	MD-50AM-15	14	5810	BN360-H315	8	6395	DC-102-RVC	41	7500	RP-001	47
0815	BC-VI	69	2843	VBV-481C	15	5005	MD-50AM-25	14	5811	BN360-H310	8	6396	DC-102-IRC	41	7508	VBV-AI810	26
0849	BC-01(H/Brake)	66	2871	BE-890C	11	5027	AC-066	24	5812	BN360-H305	8	6408	BE-8100C	11	7509	VBV-AI815	26
0875	BC-VI-2	69	2885	BA-570	68	5028	AC-067	24	5813	BN360-H3025	8	6410	BE-8101C	11	7524	VBV-360-1000	6
0896	BBS-82	65	3007	BE-L108	26	5042	BE-L101	26	5860	IP-EM4	17	6437	MDR-508-2-G2-SSD	38	7564	SP-07C	28
0897	BBS-87	65	3008	BE-L112	26	5049	AC-014(5M)	24	5860	IP-EM4 - PON	36	6438	MDR-508G-2-G2-SSD	38	7565	SP-07T	28
0898	BBS-102	64	3183	AC-024	25	5066	SK-15-05	30	5861	IP-EM8	17	6439	MDR-508GW-2-G2-SSD	38	7566	SP-7A	29
0899	BBS-107	64	3231	BE-870L-000	22	5099	UDS-OSD20-ECU	54	5864	IP-EM-PC	17	6541	DC-1XX-32SD	42	7567	SP-7B	29
0934	BBS-92	65	3335	AC-028	25	5126	MDR-644-2-SSD	36	5865	IP-EC-1	17	6542	DC-1XX-64SD	42	7595	VBV-6172-000	23
0935	BBS-97	65	3348	BMM-019-ARM	21	5127	MDR-644GW-2-SSD	36	5866	IP-EC-5	17	6615	MDR-644-1-MCU-CMR	40	7625	RP-010	47
0974	NS-3	69	3351	BE-970WM	18	5128	MDR-644G-2-SSD	36	5867	IP-L601	17	6617	MDR-644-1-MCU-SSD	40	7670	VBV-770H-7000	22
1143	BE-X020	26	3427	SK-15-01	28	5234	AC-068	25	5881	ZS-1000-ECU	58	6618	MDR-644-2-MCU-SSD	40	7673	FR-001DVS	55
1144	SK-30E	28	3560	BE-970WFM	18	5257	SS-4100W	50	5882	ZS-1000-AP	59	6648	AC-H305	24	7680	VBV-770H-3100	22
1198	BC-01(NS-B)	66	3666	SC-1000-ECU	32	5261	CS-3100	52	5883	ZS-1000-TT	60	7020	AC-075	40	7681	VBV-770H-3200	22
1242	BE-810C	12	3716	UDS-10BC	50	5262	ST-2100	53	5885	ZS-1000-MZ	60	7025	DC-102-RVC-002	41	8000	FR-30LDVS	55
1246	BA-890	67	3717	UDS-2.5BC	53	5270	BS-00NYC	57	5886	ZS-1000-SG	60	7028	DC-102-IRC-002	41	8064	FR-001R159	55
1310	SA-400	67	3719	UDS-2.5SC	53	5271	BS-02PIC	57	5887	ZS-1000-DR	60	7051	MDR-AC-ACC-01	40			
1315	SA-800	67	3720	UDS-4.5SC	53	5272	BS-02DCX	57	5888	ZS-1000-DVT	59	7053	MDR-MCU-R-01	37			
1322	BBS-82HV	64	3744	BS-4000W	51	5291	BS-00NT	57	5889	ZS-1000-PVT	59	7053	MDR-MCU-R-01	40			
1334	SS-BC-08	66	3746	UDS-15BC	53	5309	MDR-508GW-EXP-0	40	5892	ZS-1000-TC	59	7056	MDR-USB-A-01	40			
1346	CT-470	57	3747	FS-4000W	52	5310	MDR-508G-EXP-0	40	5893	ZS-1000-TWC	59	7060	MDR-641-1-MCU-CMR	40			
1362	TS-001ECU	50	3871	VSK-305E	31	5311	MDR-508W-EXP-0	40	5894	ZS-1000-AT	60	7061	MDR-641-1-MCU-SSD	40			
1398	SA-BBS-97HV	64	3997	SK-15-04	28	5318	AC-069	25	5898	ZS-AP-MP	59	7062	MDR-641-2-MCU-SSD	40			
1399	SA-BBS-97	64	4005	VSK-505E	30	5323	VBV-243M	21	5898	ZS-AP-MP	60	7068	MDR-641-1-CMR	37			
1400	SA-BBS-107	64	4032	BE-870L-100	22	5344	SS-4100W-000	50	5899	ZS-C130	59	7069	MDR-641G-1-CMR	37			
1426	BE-800C(78)	11	4215	UDS-RELAY-24	49	5345	ST-2100-60-A	53	5900	ZS-ECU-MP	58	7070	MDR-641GW-1-CMR	37			
1559	BE-800C(40)	11	4216	UDS-RELAY-12	49	5347	UDS-OSD21-ECU	54	5902	IP-L603	17	7078	MDR-641-2-SSD	37			
1570	SK-50E	29	4219	SK-UDS-05	50	5385	QVS-001-75	65	5903	IP-L605	17	7079	MDR-641G-2-SSD	37			
1571	CS-020	33	4245	AC-041	25	5426	BE-891C	11	5904	IP-L615	17	7080	MDR-641GW-2-SSD	37			
1623	BE-800C	11	4246	AC-042	25	5466	VBV-7100C	13	5907	AC-24-12(010)	25	7088	DW-2000-TX	32			
1715	BC-01(4W)(H/Brake)	66	4247	BE-800C-NIR	11	5467	VBV-7101C	13	5916	SS-4200W	49	7089	DW-2000-RX	32			
1830	SK-31E	28	4266	AC-24-12(002)	25	5470	VBV-7190C	13	5935	IP-1000C	16	7135	BS-8100	56			
1844	VCS-020	33	4267	AC-055(5M)	24	5471	VBV-7191C	13	5936	IP-1100C	17	7143	VBV-3100C	14			
1879	SK-50E-A	29	4279	AC-044	25	5511	VBV-H430	27	5937	IP-1200C	16	7144	VBV-3101C	14			
1885	SK-30E-T	28	4280	AC-045	25	5512	VBV-H425	27	5982	IP-L610	17	7145	VBV-3120C	14			
1886	SK-31E-T	28	4401	AC-056	24	5513	VBV-H420	27	5983	IP-L620	17	7146	VBV-3121C	14			
1905	BE-801C	11	4550	BS-05DCX	57	5514	VBV-H415	27	5984	IP-L630	17	7178	SS-H002	33			
1907	BE-X025	26	4551	BS-09DCX	57	5515	VBV-H412	27	5985	IP-1XXX-PC	17	7190	BKT-023	57			
1983	AC-006	24	4649	BN360-100C-BKT01	8	5516	VBV-H410	27	6016	MDR-RP02	40	7204	VBV-770HFM	20			
1984	AC-007	24	4691	AC-062	24	5517	VBV-H407	27	6018	MDR-04RPC	40	7248	BS-7100	56			
2084	BE-801C(78)	11	4701	BE360-CD	8	5518	VBV-H406	27	6057	VBV-7104HFM	20	7296	SE-770HR-300	7			
2085	BE-801C(40)	11	4714	BN360-100C-BKT02	8	5519	VBV-H405	27	6075	SS-4200W-000	49	7297	SE-7014HRF-300	7			
2094	AC-0014	24	4719	AC-24-12(006)	25	5520	VBV-H404	27	6079	ZS-1000-BKT	60	7321	VBV-2220C AI-D04	10			
2099	BE-X005	26	4743	BN360-100C-BKT03	8	5521	VBV-H403	27	6153	SSP-6000W	48	7366	BE-H0003	26			
2100	BE-X010	26	4752	TCO-47-01	69	5522	VBV-H4025	27	6201	MDR-500-0.5-MCU-G2-SSD	40	7367	BE-H001	26			
2101	BE-X015	26	4762	AC-24-12(007)	25	5523	VBV-H4005	27	6202	MDR-500-1-MCU-G2-SSD	40	7368	BE-H003	26			
2146	BE-870FM	19	4763	AC-24-12(008)	25	5583	MDR-644G-1-CMR	36									
2150	AC-016	25	4765	VBV-650-000	23	5585	MDR-644GW-1-CMR	36									
2152	EDM-50	32	4766	VBV-650-000N	23	5611	VBV-770HM	21									



Model	Part	Page	Model	Part	Page	Model	Part	Page	Model	Part	Page	Model	Part	Page	Model	Part	Page
AC-006	1983	24	BE-800C-NIR	4247	11	BS-25DCSX	4975	57	MDR-500-1-MCU-G2-CMR	6243	40	SK-50E	1570	29	VBV-H405	5519	27
AC-007	1984	24	BE-800C(40)	1559	11	BS-4000W	3744	51	MDR-500-1-MCU-G2-SSD	6202	40	SK-50E-A	1879	29	VBV-H406	5518	27
AC-014(5M)	5049	24	BE-800C(78)	1426	11	BS-7100	7248	56	MDR-500-2-MCU-G2-SSD	6203	40	SK-UDS-05	4219	50	VBV-H407	5517	27
AC-016	2150	25	BE-801C	1905	11	BS-8100	7135	56	MDR-508-1-G2-CMR	6244	38	SP-07C	7564	28	VBV-H410	5516	27
AC-019	2589	25	BE-801C(40)	2085	11	BS-9100	6351	57	MDR-508-2-G2-SSD	6437	38	SP-07T	7565	28	VBV-H412	5515	27
AC-020	2590	24	BE-801C(78)	2084	11	BS-WD-USB	5637	57	MDR-508G-1-G2-CMR	6245	38	SP-7A	7566	29	VBV-H415	5514	27
AC-024	3183	25	BE-8100C	6408	11	CS-020	1571	33	MDR-508G-2-G2-SSD	6438	38	SP-7B	7567	29	VBV-H420	5513	27
AC-028	3335	25	BE-8101C	6410	11	CS-3100	5261	52	MDR-508G-EXP-0	5310	40	SS-4100W	5257	50	VBV-H425	5512	27
AC-041	4245	25	BE-810C	1242	12	CT-470	1346	56	MDR-508GW-1-G2-CMR	6246	38	SS-4100W-000	5344	50	VBV-H430	5511	27
AC-042	4246	25	BE-850C	4924	11	DC-101	6290	42	MDR-508GW-2-G2-SSD	6439	38	SS-4200W	5916	49	VCS-020	1844	33
AC-044	4279	25	BE-870FM	2146	19	DC-101-001	6558	42	MDR-508GW-EXP-0	5309	40	SS-4200W-000	6075	49	VSK-305E	3871	31
AC-045	4280	25	BE-870HM	6380	19	DC-102-IRC	6396	41	MDR-508W-EXP-0	5311	40	SS-BC-08	1334	66	VSK-30E	2538	31
AC-055(5M)	4267	24	BE-870L-000	3231	22	DC-102-IRC-002	7028	41	MDR-641-1-CMR	7068	37	SS-H002	7178	33	VSK-30E-T	2542	30
AC-056	4401	24	BE-870L-100	4032	22	DC-102-RVC	6395	41	MDR-641-1-MCU-CMR	7060	40	SSP-6000W	6153	48	VSK-31E	2539	31
AC-062	4691	24	BE-870LM	2705	19	DC-102-RVC-002	7025	41	MDR-641-2-MCU-SSD	7062	40	ST-2100	5262	53	VSK-31E-T	2543	31
AC-063	4925	24	BE-890C	2871	11	DC-1XX-32SD	6541	42	MDR-641G-1-CMR	7069	37	ST-2100-60-A	5345	53	VSK-505E	4005	30
AC-064	4948	25	BE-891C	5426	11	DC-1XX-64SD	6542	42	MDR-641G-2-SSD	7079	37	TCO-47	0663	69	VSK-50E	2540	30
AC-066	5027	24	BE-970WFM	3560	18	DC-1XX-DPC7	6323	42	MDR-641GW-1-CMR	7070	37	TCO-47-01	4752	69	VSK-50E-A	2541	30
AC-067	5028	24	BE-970WM	3351	18	DC-1XX-LOCK	6296	42	MDR-644-1-CMR	6570	36	TS-001ECU	1362	50	ZS-1000-AP	5882	59
AC-068	5234	25	BE-H0003	7366	26	DC-204-AI	7477	43	MDR-644-1-MCU-SSD	6615	40	UDS-10BC	3716	50	ZS-1000-AT	5894	60
AC-069	5318	25	BE-H001	7367	26	DC-IR-CAM	6293	42	MDR-644-2-MCU-SSD	6617	40	UDS-15BC	3746	53	ZS-1000-BKT	6079	60
AC-075	7020	40	BE-H003	7368	26	DC-REAR-CAM	6292	42	MDR-644-2-SSD	5126	36	UDS-2.5BC	3717	53	ZS-1000-DR	5887	61
AC-0014	2094	24	BE-H005	7369	26	DMC-1031	5719	15	MDR-644-2-MCU-SSD	5128	36	UDS-2.5SC	3719	53	ZS-1000-DVT	5888	59
AC-24-12(002)	4266	25	BE-H008	7370	26	DMC-1035	5721	15	MDR-644G-1-CMR	5583	36	UDS-4.5SC	3720	53	ZS-1000-ECU	5881	58
AC-24-12(006)	4719	25	BE-H010	7371	26	DW-2000-RX	7089	32	MDR-644G-2-SSD	5128	36	UDS-7.0SC	5623	53	ZS-1000-MZ	5885	60
AC-24-12(007)	4762	25	BE-H012	7372	26	DW-2000-TX	7088	32	MDR-644GW-1-CMR	5585	36	UDS-OSD20-ECU	5099	54	ZS-1000-PVT	5889	59
AC-24-12(008)	4763	25	BE-H015	7373	26	EDM-50	2152	32	MDR-644GW-2-SSD	5127	36	UDS-OSD21-ECU	5347	54	ZS-1000-SG	5886	61
AC-24-12(009)	4926	24	BE-H020	7374	26	FS-4000W	3747	52	MDR-AC-ACC-01	7051	40	UDS-RELAY-12	4216	49	ZS-1000-TC	5892	59
AC-24-12(010)	5907	25	BE-H025	7375	26	FR-001DVS	7673	55	MDR-MCU-R-01	7053	37	UDS-RELAY-24	4215	49	ZS-1000-TT	5883	60
AC-24-12(011)	5760	26	BE-H030	7376	26	FR-30LDVS	8000	55	MDR-MCU-R-01	7053	40	VBV-2220C AI-D04	7321	10	ZS-1000-TWC	5893	59
AC-305	4903	40	BE-L1003	2797	26	FR-001R159	8064	55	MDR-RP02	6016	40	VBV-2230C AI-D04	7396	10	ZS-AP-MP	5898	60
AC-306	4904	24	BE-L101	5042	26	IP-1000C	5935	16	MDR-USB-A-01	7056	40	VBV-243M	5323	21	ZS-C130	5899	59
AC-306	4904	40	BE-L105	0804	26	IP-1100C	5936	17	NS-2	0334	69	VBV-3100C	7143	14	ZS-ECU-MP	5900	58
AC-307	4905	24	BE-L108	3007	26	IP-1200C	5937	16	NS-3	0974	69	VBV-3101C	7144	14			
AC-307	4905	40	BE-L110	0803	26	IP-1XXX-PC	5985	17	QVS-001-75	5385	65	VBV-3120C	7145	14	CarEYE Turning Angle Sensor		
AC-308	4949	24	BE-L112	3008	26	IP-EC-1	5865	17	RP-001	7500	47	VBV-3121C	7146	14	CS-SET-00091		46
AC-H305	6648	24	BE-L115	0802	26	IP-EC-5	5866	17	RP-010	7625	47	VBV-360-1000	7524	6	CarEYE Digital 7" 16:9 monitor		
BA-13	0015	68	BE-L120	0801	26	IP-EM-PC	5864	17	SA-400	1310	67	VBV-481C	2843	15	CS-SET-00380		46
BA-57	0027	68	BE-L130	0800	26	IP-EM4	5860	17	SA-800	1315	67	VBV-485C	2199	15	CAREYE® Turn assist with AI - Left side		
BA-560	2742	68	BE-X003	0805	26	IP-EM4 - PON	5860	36	SA-BBS-107	1400	64	VBV-650-000	4765	23	CAREYE® Turn assist with AI - Right side		
BA-570	2885	68	BE-X005	2099	26	IP-EM8	5861	17	SA-BBS-97	1399	64	VBV-650-000N	4766	23	CS-SET-00400		46
BA-890	1246	67	BE-X010	2100	26	IP-L601	5867	17	SA-BBS-97HV	1398	64	VBV-6172-000	7595	23	CarEYE Wing extension		
BBS-82	0896	65	BE-X015	2101	26	IP-L603	5902	17	SC-1000-ECU	3666	32	VBV-7100C	5466	13	CS-SET-00530		46
BBS-82HV	1322	64	BE-X020	1143	26	IP-L605	5903	17	SD-32GB-IND	4875	40	VBV-7101C	5467	13	CAREYE® Turn assist with AI - Right side		
BBS-87	0897	65	BE-X025	1907	26	IP-L610	5982	17	SD-64GB-IND	4876	40	VBV-7104HFM	6057	20	CS-SET-00610		46
BBS-92	0934	65	BKT-023	7190	56	IP-L615	5904	17	SE-7014HRF-300	7297	7	VBV-710C	2808	13			
BBS-92ADR	2165	64	BMM-019-ARM	3348	21	IP-L615	5904	17	SE-770HR-300	7296	7	VBV-710C	2808	13			
BBS-97	0935	65	BN360-100C-BKT01	4649	8	IP-L620	5983	17	SK-15-01	3427	28	VBV-7190C	5470	13			
BBS-102	0898	64	BN360-100C-BKT02	4714	8	IP-L630	5984	17	SK-15-04	3997	28	VBV-7191C	5471	13			
BBS-107	0899	64	BN360-100C-BKT03	4743	8	LS-60-A	4851	33	SK-15-05	5066	30	VBV-770H-3100	7680	22			
BBS-TI	6317	65	BN360-300	5800	7	MD-50AM-15	5004	14	SK-30E	1144	28	VBV-770H-3200	7681	22			
BC-01	0077	66	BN360-H3025	5813	8	MD-50AM-25	5005	14	SK-30E-T	1885	28	VBV-770H-7000	7670	22			
BC-01(4W)(H/Brake)	1715	66	BN360-H305	5812	8	MD-50SM-30	5003	14	SK-31E	1830	28	VBV-770HFM	7204	20			
BC-01(B)	0079	66	BN360-H310	5811	8	MD-60	5737	14	SK-31E-T	1886	28	VBV-770HM	5611	21			
BC-01(H/Brake)	0849	66	BN360-H315	5810	8	MD-60(SW)	5688	14				VBV-AI801	7489	26			
BC-01(NS-B)	1198	66	BN360-H320	5809	8	MD-60(W)	5696	14				VBV-AI805	7490	26			
BC-01(NS)	0378	66	BS-00NT	5291	57	MD-61	5738	14				VBV-AI810	7508	26			
BC-02(B)	0083	66	BS-00NYC	5270	57	MD-61(SW)	5690	14				VBV-AI815	7509	26			
BC-VI	0815	69	BS-02DCX	5272	57	MD-61(W)	5698	14				VBV-AI820	7491	26			
BC-VI-2	0875	69	BS-02PIC	5271	57	MDR-04RPC	6018	40				VBV-H4005	5523	27			
BE360-CD	4701	8	BS-05DCX	4550	57	MDR-500-0.5-MCU-G2-SSD	6201	40				VBV-H4025	5522	27			
BE-800C	1623	11	BS-09DCX	4551	57							VBV-H403	5521	27			
												VBV-H404	5520	27			

# Warranties

LIFETIME	<b>Lifetime New-For-Old Warranty (covers product for the life of vehicle)</b> bbs-tek® White sound® reversing alarms Self-adjusting backalarms
5 YEARS	<b>5 Year New-For-Old Warranty</b> Backeye®360 camera system ELITE range camera monitor systems
3 YEARS	<b>3 Year New-For-Old Warranty</b> SELECT range camera monitor systems MDR 644 & 508 series mobile digital recorders, IP cameras and accessories Ultrasonic object detection systems Backsense® radar object detection systems & on-screen display
2 YEARS	<b>2 Year New-For-Old Warranty</b> AI Cameras Careye® Turn Assist Camera monitor system ancillaries MDR 641 series mobile digital recorders Ultrasonic object detection on-screen display Ultrasonic object detection ancillaries and extras Alarm ancillaries Backchat® Speaking alarms Vehicle intercom QVS Quiet vehicle sounder Zonesafe® Antenna & Control unit
1 YEAR	<b>1 Year New-For-Old Warranty*</b> ESSENTIAL camera monitor systems ZoneSafe® RFID Tags and ancillaries Dashcams All products aside those specifically listed

## Warranty Terms and Conditions

Brigade warrants all goods to be free from defect in material and workmanship in normal use provided that they have been installed and operated in accordance with the instructions supplied. Normal wear-and-tear excluded. The commencement date of all warranties is the date of delivery to the purchaser unless otherwise agreed in writing by Brigade. The period during which the warranty applies is stated above. Brigade make no other warranty, express or implied, with respect to the goods, their marketability, quality or fitness for any particular use or purpose. In particular, but without prejudice to the general provisions of the conditions of sale, no responsibility is assumed for incidental or consequential loss by reason of any warranty express or implied. Full details of Brigade's Terms and Conditions can be found at [brigade-electronics.com/terms-conditions/](http://brigade-electronics.com/terms-conditions/).

Brigade Electronics Group Plc reserves the right to change terms, conditions and specifications shown in this catalogue at any time.



# Brigade Group

**Brigade Electronics Group Plc**

Brigade House, The Mills  
Station Road, South Darenth  
DA4 9BD. United Kingdom  
Tel: +44 (0)1322 420300  
Email: [exportsales@brigade-electronics.com](mailto:exportsales@brigade-electronics.com)  
[www.brigade-electronics.com](http://www.brigade-electronics.com)

**Brigade Electronics (UK) Ltd**

Brigade House, The Mills  
Station Road, South Darenth  
DA4 9BD. United Kingdom  
Tel: +44 (0)1322 420300  
Email: [sales@brigade-electronics.com](mailto:sales@brigade-electronics.com)  
[www.brigade-electronics.com](http://www.brigade-electronics.com)

**Brigade Elektronik GmbH**

Havelstraße 21  
24539 Neumünster. Germany  
Tel: +49 (0) 4321 9655610  
Email: [info@brigadegmbh.de](mailto:info@brigadegmbh.de)  
[www.brigade-elektronik.de](http://www.brigade-elektronik.de)

**Brigade Elettronica srl**

Corso Trapani, 16  
10139 Torino. Italy  
Tel: +39 011-0142105  
Email: [info-italia@brigade-electronics.com](mailto:info-italia@brigade-electronics.com)  
[www.brigade-elettronica.it](http://www.brigade-elettronica.it)

**Brigade Electronics BV**

Ambachtstraat 8  
7587 BW de Lutte  
The Netherlands  
Tel: +31 541 53 18 01  
Email: [info@brigade-electronics.nl](mailto:info@brigade-electronics.nl)  
[www.brigade-electronics.nl](http://www.brigade-electronics.nl)

**Brigade Electronics FRANCE SAS**

Siège social: 5 rue Lucien Chaserant  
72650 Saint Saturnin France  
Tel : 02 99 03 60 34  
Email: [info@brigade-electronics.fr](mailto:info@brigade-electronics.fr)  
[www.brigade-electronics.fr](http://www.brigade-electronics.fr)

**Brigade Electronics Inc**

1976 West Tyson Road  
Portland, IN 47371. USA  
Tel: +1 (260) 766-4343  
Email: [sales@brigade-inc.com](mailto:sales@brigade-inc.com)  
[www.brigade-inc.com](http://www.brigade-inc.com)

**Brigade Electronics (Canada) Limited**

2390 Industrial St,  
Burlington, ON, L7P 1A5 Canada  
Tel: +1 (905) 319-9993  
Email: [contact@brigade-electronics.ca](mailto:contact@brigade-electronics.ca)  
[www.brigade-electronics.ca](http://www.brigade-electronics.ca)

**Brigade Electronics (Polska) sp. z o.o.**

ul. Olszewskiego 6,  
25-663 Kielce. Poland  
Tel: +48 887 480 950  
Email: [info@brigade.com.pl](mailto:info@brigade.com.pl)  
[www.brigade.com.pl](http://www.brigade.com.pl)

**Spain**

[brigade-electronics.es](http://brigade-electronics.es)

# You're safer with us

